



Enhancing our communities





# Cranberry Marsh Estates

## STORMWATER MANAGEMENT REPORT

Hill Ridge Homes

# Document Control

File:	Prepared by:	Prepared for:
120181	<b>Tatham Engineering Limited</b> 115 Sandford Fleming Drive, Suite 200 Collingwood, Ontario L9Y 5A6 T 705-444-2565 tathameng.com	<b>Hill Ridge Homes</b> 110 Jardin Crescent, Suite 14 Vaughan, Ontario L4K 2T7
Date:		
<b>December 4, 2023</b>		

Authored by:	Reviewed by:
	
John Birchard, B.Eng., EIT Engineering Intern	Doris Casullo, B.A.Sc., P.Eng. Project Manager, Senior Engineer

Disclaimer	Copyright
The information contained in this document is solely for the use of the Client identified on the cover sheet for the purpose for which it has been prepared and Tatham Engineering Limited undertakes no duty to or accepts any responsibility to any third party who may rely upon this document.	This document may not be used for any purpose other than that provided in the contract between the Owner/Client and the Engineer nor may any section or element of this document be removed, reproduced, electronically stored or transmitted in any form without the express written consent of Tatham Engineering Limited.

Issue	Date	Description
1	March 4, 2022	Draft Plan Submission
2	December 1, 2022	2nd Submission
3	July 28, 2023	3 <sup>rd</sup> Submission
4	December 4, 2023	4 <sup>th</sup> Submission

# Document Contents

- 1 Introduction ..... 1**
- 1.1 Objectives .....1
- 1.2 Guidelines & Background Reports .....1
- 2 Development Site .....2**
- 2.1 Site Location & Description .....2
- 2.2 Surface Conditions .....2
- 2.3 Subsurface Conditions.....2
- 2.4 Proposed Development.....3
- 3 Existing Drainage Conditions..... 4**
- 3.1 Surface Drainage & Runoff .....4
- 3.2 Surface Drainage & Runoff .....5
- 4 Proposed Stormwater Management Plan.....7**
- 4.1 Design Criteria .....7
- 4.2 Proposed Drainage Conditions .....8
- 4.3 Water Quantity .....8
- 4.4 Water Quality.....10
- 4.5 Groundwater .....10
- 4.6 Flood Hazard .....11
- 5 Siltation & Erosion Plan..... 13**
- 6 Summary.....14**



**Tables**

Table 1: Pre-Development Peak Flow Rate Summary ..... 6  
Table 2: Post-Development Peak Flow Rate Summary ..... 9  
Table 3: Cranberry Marsh Stage Storage Relationship ..... 122

**Drawings**

- ESC-1: Erosion and Sediment Control Plan
- ESC-2: Erosion and Sediment Control Details
- DP-1: Pre-Development Drainage Plan
- DP-2: Post-Development Drainage Plan
- SG-1: Site Grading Plan
- DE-1: Details and Notes

**Appendices**

- Appendix A: Pre-Development SWM Calculations
- Appendix B: Post-Development SWM Calculations
- Appendix C: Storage and Conveyance Calculations
- Appendix D: Pre and Post Floodplain Storage Analysis



# 1 Introduction

Tatham Engineering Limited has prepared this Stormwater Management (SWM) Report in support of a site plan approval application of a residential development located in the Town of Collingwood, County of Simcoe. Specifically, this report has been prepared to address the requirements related to stormwater management associated with the project.

## 1.1 OBJECTIVES

The primary objective of this report is to investigate the existing and proposed drainage conditions of the subject property to develop a stormwater management plan that not adversely affect local surface water quantity or water quality conditions. This will be accomplished by evaluating the effect of the development on local drainage conditions and, where necessary, providing solutions to mitigate any adverse impacts.

## 1.2 GUIDELINES & BACKGROUND REPORTS

This report was prepared recognizing provincial guidelines on water resources and the environment, including the following publications:

- The Ministry of the Environment, Conservation and Parks (MECP) Stormwater Management Practices Planning and Design Manual (2003);
- Town of Collingwood Development Standards (2007); and
- Nottawasaga Valley Conservation Authority Stormwater Technical Guide (2013).

Additional reports have been prepared in conjunction with this report in support of the proposed residential development and are summarized below.

- *Regional Stormwater Management Update & Master SWM Strategy* prepared by C.F. Crozier & Associates Inc. (May 2007);
- *Regional Stormwater Management Update & Master SWM Strategy - Tanglewood at Cranberry Trail / Cranberry Creek Watershed - Tanglewood (Sierra Homes) Inc.*, prepared by Crozier (May 2007);
- *Cranberry Marsh Estates Preliminary Stormwater Management Report* prepared by C.C. Tatham & Associates Ltd. (October 2011); and
- *Flood Study - Wyldewood Creek* prepared by C.F. Crozier & Associates Inc. (September 2020).



## 2 Development Site

### 2.1 SITE LOCATION & DESCRIPTION

The subject property consists of approximately 1.29 ha of undeveloped land located south of Highway 26 in the Town of Collingwood. The site is currently vacant, and primarily tree covered with an environmentally protected marsh area at the south end of the property.

The municipal address of the subject property is 11589 Highway 26. The subject property is bounded by Highway 26 to the north, Georgian Manor Resort to the west, Greentrees Nursery & Emporium to the east, and the Cranberry Marsh to the south. The subject property is zoned as R3-34 (H10) – *Residential Third Density Exception 34*, excluding the southern portion of the site, which is zoned as EP-11 – *Environmental Protection Exception 11*. The subject property is regulated by the Nottawasaga Valley Conservation Authority (NVCA).

### 2.2 SURFACE CONDITIONS

A topographic survey of the subject property was completed by C.C. Tatham & Associates Ltd. in 2012 and updated based on a recent survey completed by Tatham Engineering in October 2022. The existing grading of the 170 m deep segment of land fronting Highway 26 generally slopes from the south to the north at an average gradient of 0.6%. The remainder of the subject property generally slopes from the north to south at an average slope of 0.3%. The site is currently vacant, and primarily tree covered with an environmentally protected marsh area at the south end of the property.

Refer to the Pre-Development Drainage Plan (DP-1) for details on existing drainage areas.

### 2.3 SUBSURFACE CONDITIONS

A geotechnical investigation, submitted under separate cover, completed by Peto MacCallum Ltd. dated January 2022. Fieldwork was conducted on November 22, 2021, consisting of four boreholes. The boreholes advanced to auger refusal, 3.4 m to 3.7 m below existing ground surface. Subsurface conditions are as follows:

- 50 mm to 200 mm of surficial topsoil;
- Borehole 1 showed a 650 mm layer of silt that was found to be very moist;
- Boreholes 2 - 4 showed a 0.5 m to 1.3 m layer of loose sand with trace amounts of silt and organics. The sand was found to be wet;
- A major till deposit extends below the silt or sand layers to the termination of the boreholes at 3.4 m for Borehole 3, and 3.7 m for Boreholes 1, 2 and 4. The till matrix varied from a silt



and sand with trace gravel and trace clay to a sandy silt with some gravel and trace clay. The till density was loose to very compact; and

- Auger refusal could have been due to boulders in the till or a shallow bedrock common in the area.

Groundwater was measured in the monitoring wells (Boreholes 1, 3 and 4) one month after installation (December 17, 2021). The geotechnical investigation established that the stabilized groundwater table is within 0.5 m of the existing surface at 179.30 m.

The soil has been classified as Parkhill loam or silt loam (Type BC), as per the *Soil Survey of Simcoe County - Report No. 29 of the Ontario Soil Survey*, completed by the Ontario Department of Agriculture. This soil group has low to moderate infiltration rates when thoroughly wetted.

## **2.4 PROPOSED DEVELOPMENT**

The proposed development features a 7.2 m private road and cul-de-sac, beginning at Highway 26 and extending 220 m towards Cranberry Marsh, followed by a turning circle. The development will feature 5 buildings fronting the road and cul-de-sac, which will comprise of 26 townhomes. The majority of the lots will have 6 m frontages and are 28 m deep. The proposed development is shown on the Site Grading Plan (SG-1).



## 3 Existing Drainage Conditions

Information regarding the existing topography, ground cover and drainage patterns were obtained through collection of detailed topographic survey data, aerial photos and the review of relevant background reports.

### 3.1 SURFACE DRAINAGE & RUNOFF

#### 3.1.1 Development Site

The existing grade of the northern portion of the subject site (Catchment 101) generally slopes from the south to the north at an average gradient of 0.6%, discharging to an existing ditch conveying water towards the west property line where it enters an existing 600 mm diameter CSP. The CSP outlets into the roadside ditch south of Highway 26. The southern portion of the subject site (Catchment 102) generally slopes from the north to south at an average slope of 0.3%, outletting into the Cranberry Marsh to the south. Refer to the Pre-Development Drainage Plan (DP-1) for details on existing drainage areas.

#### 3.1.2 Cranberry Marsh

The Cranberry Marsh borders the subject property to the south and various other properties described in this report. The Cranberry Marsh has been identified as a Provincially Significant Wetland (PSW). In support of the Tanglewood at Cranberry Trail Development (May 2007), C.F. Crozier & Associates Inc. defined a regulatory flood hazard limit at 179.80 masl. This was confirmed through discussions with the NVCA, who noted that they would base their approval of the proposed development on the 2007 regulatory flood boundary prepared by C.F. Crozier.

#### 3.1.3 Greentrees Nursery & Emporium

Surface runoff from the Greentrees Nursery & Emporium property drains overland as sheet flow into perimeter ditches surrounding the property.

The west perimeter ditch (adjacent to the east property line of the subject site) has an average slope of 0.1% to the north and has various high and low points. Runoff from the ditch enters an existing 300 mm diameter CSP culvert that conveys runoff to an existing storm maintenance hole on the south side of Highway 26. This storm maintenance hole is connected to a maintenance hole on the north side of Highway 26 via a 300 mm diameter CSP pipe, discharging into the north Highway 26 roadside ditch opposite the subject property.





The Greentrees Nursery & Emporium south perimeter ditch connects directly to the west perimeter ditch and Cranberry Marsh. Depending on the water level in the Cranberry Marsh, this ditch also surcharges and functions as a storage area.

Under surcharged pipe conditions or elevated Cranberry Marsh water levels, the ditch water levels can rise to a level that causes water to spill over the west bank of the west ditch into the subject property. Runoff then flows northwest overland across the subject property where it eventually discharges into the Highway 26 roadside ditch.

There are plans by Sherwood Homes to re-develop Greentrees Nursery & Emporium. Tatham Engineering has been retained to develop the site grading plan and the stormwater management plan for this new development, presenting a unique opportunity to develop Cranberry Marsh Estates stormwater management plan in conjunction with the future Greentree Development. Modifications to the Greentree site drainage will include replacement of the west ditch that functions with both the Greentree site and the proposed Cranberry Marsh Estates site (existing elevations along the adjoining property line are subject to change).

#### **3.1.4 Georgian Manor Resort**

The quadplex residential development immediately adjacent to the west property boundary of the subject site drains east to a 4.0 m utility easement located between the two properties. A high point approximately 175 m from the north property boundary directs flows north to the Highway 26 roadside ditch (from catchment 301) or south to an existing Stormwater Management Facility (SWMF) servicing Georgian Manor Resort (from catchment 302). There is no defined swale or ditch within the bordering properties, as such runoff from the rear of the quadplex units will spill into the Cranberry Marsh Estates property before ultimately draining to Highway 26 roadside ditch or the existing SWMF.

#### **3.1.5 South Highway 26 Roadside Ditch Draining West**

The south roadside ditch of Highway 26 draining west has a flat slope of less than 0.5%. As per *Cranberry Marsh Estates Preliminary Stormwater Management Report* prepared by C.C. Tatham & Associates Ltd. (October 2011), the ditch does not provide a sufficient outlet for the flow directed to it under flood spill conditions and as a result can cause additional flooding of adjacent lands between Princeton Shores Boulevard and the Cranberry Marsh Estates property.

### **3.2 SURFACE DRAINAGE & RUNOFF**

The existing conditions, considering the site's surface and subsurface conditions, have been modelled in Visual OTTHYMO to establish the pre-development peak flows. The pre-development flows results are summarized in Table 1 and supporting calculations are provided in Appendix A.



**Table 1: Pre-Development Peak Flow Rate Summary**

PRE-DEVELOPMENT PEAK FLOW RATE (M <sup>3</sup> /SEC)				
STORM EVENT	CATCH. 101/301 CHICAGO DESIGN STORM	CATCH. 101/301 SCS 24-HOUR STORM	CATCH. 102/302 CHICAGO DESIGN STORM	CATCH. 102/302 SCS 24-HOUR STORM
25mm	0.016	-	0.005	-
2-year	0.023	0.048	0.007	0.019
5-year	0.041	0.076	0.014	0.032
10-year	0.055	0.096	0.019	0.042
25-year	0.074	0.122	0.027	0.055
50-year	0.089	0.142	0.033	0.064
100-year	0.104	0.163	0.039	0.074
<b>Timmins</b>	<b>0.095</b>	<b>-</b>	<b>0.057</b>	<b>-</b>



# 4 Proposed Stormwater Management Plan

## 4.1 DESIGN CRITERIA

The proposed stormwater management plan is subject to the review and approval of the Town of Collingwood and the NVCA. Issues to be addressed and criteria to be met regarding the development of the site are summarized below.

### 4.1.1 Stormwater Quality Control

Water quality controls must be provided to satisfy the MECP SWM Practices Planning and Design Manual. Georgian Bay is the ultimate receiving waterbody for site drainage to the Highway 26 roadside ditch north of the subject and external sites (Catchment 201/303). The Cranberry Marsh is the receiving waterbody for drainage from subject and external sites to the south (from Catchment 202/203/204/205/206/304). Enhanced level water quality protection is required in the form of 80% total suspended solids (TSS) removal and treatment of 90% of the surface runoff generated from the contributing drainage area that occurs on a long-term average basis.

### 4.1.2 Stormwater Quantity Control

Proposed condition peak flow rates discharging into the Highway 26 roadside ditch north of the subject site (from Catchment 201) must be controlled to existing condition rates for all storms up to and including the 100-year event to ensure there are no adverse impacts for downstream landowners.

*A Regional Stormwater Management Update & Master SWM Strategy* prepared by C.F. Crozier & Associates (May 2007) confirmed that increases in the Cranberry Marsh water levels resulting from increased runoff volumes from new developments within the Cranberry watershed north of the Georgian Trail are to be mitigated by hydraulic improvements to Cranberry Creek and the Cranberry Marsh Outlet. As the Cranberry Marsh is the ultimate receiving waterbody for the subject site drainage to the south (Catchment 202/203/204/205/206), pre- to post- quantity control is not required. Safe conveyance to a sufficient outlet must be provided for the Regulatory Storm event.

### 4.1.3 Siltation and Erosion Control

Recommendations for a siltation and erosion control strategy that will be implemented during construction must be provided.



## 4.2 PROPOSED DRAINAGE CONDITIONS

The proposed Cranberry Marsh Estates Development will include 215m of 7.2m private road terminating north of the Cranberry Marsh with a cul-de-sac. The development will feature 26 townhome units fronting the proposed street.

The east portion of the site (Catchment 203/204/205/206) will be conveyed via a series of side-yard swales towards the road. Via a series of double catch basins at designated low points along the road, accumulated runoff in the road will drain under the proposed sidewalk and into a proposed enhanced grass ditch/bio-swale near the east property line of the subject site. The enhanced grass ditch accommodates up to and including the 25 mm design storm before spilling over into the protected area bordering the Cranberry Marsh at the south end of the site, ultimately flowing into the Cranberry Marsh. The runoff from half of the rear yards of proposed Block 4 and 5 (Catchment 202), as well as the runoff from the rear yards of the southern three and a half buildings at the Georgian Manor Resort (Catchment 304) will be collected by a swale and conveyed towards the Cranberry Marsh. Catchments 202, 203, 204, 205, 206 and 304 do not require quantity control as per the *Regional Stormwater Management Update & Master SWM Strategy* prepared by C.F. Crozier & Associates (May 2007).

The runoff from the rear yards of proposed Block 1, 2, 3 and half of block 4 (Catchment 201) and the rear yards of the northern four and a half buildings at the Georgian Manor Resort (Catchments 303) will be collected by a swale that will convey the water towards the Highway 26 roadside ditch.

The proposed drainage patterns are shown on the *Post-Development Drainage Plan (DP-2)*.

## 4.3 WATER QUANTITY

A Visual OTTHYMO model was developed to determine peak flow rates from the subject site under existing and proposed conditions for the 25mm through 100-year storm events. The model was then used to compare the peak flow rates to existing condition levels to the proposed stormwater management design. A summary of proposed condition peak flow rates is provided in Table 2. The proposed condition supporting calculations are provided in Appendix B.



**Table 2: Post-Development Peak Flow Rate Summary**

POST-DEVELOPMENT PEAK FLOW RATE (M <sup>3</sup> /SEC)				
STORM EVENT	CATCH. 201/303 CHICAGO DESIGN STORM	CATCH. 201/303 SCS 24-HOUR STORM	CATCH. 202-206/304 CHICAGO DESIGN STORM	CATCH. 202-206/304 SCS 24-HOUR STORM
25mm	0.006 (0.016)	-	0.077 (0.005)	-
2-year	0.006 (0.023)	0.013 (0.048)	0.085 (0.007)	0.105 (0.019)
5-year	0.010 (0.041)	0.026 (0.076)	0.131 (0.014)	0.157 (0.032)
10-year	0.014 (0.055)	0.035 (0.096)	0.160 (0.019)	0.192 (0.042)
25-year	0.021 (0.074)	0.049 (0.122)	0.199 (0.027)	0.237 (0.055)
50-year	0.027 (0.089)	0.061 (0.142)	0.230 (0.033)	0.274 (0.064)
100-year	0.033 (0.104)	0.073 (0.163)	0.261 (0.039)	0.308 (0.074)
Timmins	0.048 (0.095)	-	0.129 (0.057)	-

*Note: Values in brackets represent existing condition flows*

The results shown in Table 2 confirm that the proposed condition peak flow rates from catchments 201/303 discharging to the Highway 26 ditch are maintained below existing condition levels for storms up to and including the 100-year storm event. Post peak flows to the south (Catchment 202-206/304) will discharge to the Cranberry Marsh uncontrolled as pre- to post- quantity controls is not required.

Emergency overland flows will spill over the east curb and gutter and be conveyed as sheet flow towards the enhanced grass ditch. The overland flow routes will pond to a maximum depth of 150 mm in the roadway.

The enhanced grass ditch overflow outlet will allow for a peak weir flow of 0.293 m<sup>3</sup>/s at 160 mm of depth, which can accommodate the modelled 100-year storm peak flow of 0.257 m<sup>3</sup>/s for catchment 203, 204, 205 and 206 that drains towards the ditch. The bed of the ditch will consist of a permeable soil layer, filter fabric and a gravel layer to allow the storage component of the ditch. Refer to the Post-Development Drainage Plan (DP-2) and the (SG-1) Site Grading Plan for the proposed drainage patterns. Weir flow calculations are detailed in Appendix C.



#### 4.4 WATER QUALITY

Enhanced water quality controls must be provided to satisfy the MECP SWM Practices Planning and Design Manual, requiring in the form of 80% total suspended solids (TSS) removal and treatment of 90% of the surface runoff generated from the contributing drainage area. The details pertaining to the water quality control measures to be implemented are summarized as follows:

- **Catchment 203/204/205/206** – Runoff from these catchments derives from the road, cul-de-sac and the driveway of all the proposed units, along with half the rooftops and front yards. Enhanced water quality controls for this catchment will be provided by a flat-bottom enhanced grass ditch/bio-swale before discharging into the Cranberry Marsh. The ditch conforms to runoff quality treatment in grass swales criteria provided in Section 4.5.9 of the MOE Stormwater Management Planning and Design Manual (March 2003) and has the design capacity to retain the 25 mm design storm or the first flush of major storm events. Water volumes exceeding the ditch capacity will discharge through a rip rap spillway at the south extent of the bio-swale and into the protected area bordering Cranberry Marsh, ultimately discharging into the Cranberry Marsh. Runoff will enter the ditch through a series of four double catch basins inlets along the road. The bed of the ditch will consist of a permeable soil layer, filter fabric and a gravel layer to provide enhanced water quality treatment and allow the storage component of the ditch to drain. The bio-swale volume calculations are detailed in Appendix C.
- **Catchments 201/303** – Runoff from these catchments derive from rooftops and lawns before discharging into the Highway 26 roadside ditch and are considered clean runoff. Therefore, no water quality controls are required.
- **Catchment 202** – The runoff from this catchment derives from rooftops, lawns, a play area, a small section of asphalt trail and the environmentally protected area bordering Cranberry Marsh, before discharging into the marsh and is considered clean runoff. Therefore, no water quality control is required.
- **Catchment 304** – Runoff from this catchment derives from rooftops and lawns before discharging into the Cranberry Marsh and is considered clean runoff. Therefore, no water quality control is required.

#### 4.5 GROUNDWATER

A geotechnical investigation completed by Peto MacCallum Ltd. (dated January 2022) consisting of four exploratory sampled boreholes and three monitoring wells (Boreholes 1, 3 and 4) measured the groundwater one month after installation (December 2021). The geotechnical investigation established that the stabilized groundwater table is within 0.5 m of the existing



surface at 179.30 m. The invert of the enhanced grass swale is set to 179.60 m, 0.30m above the highest measured groundwater level. Based on the high groundwater levels on the site, the use of Low Impact Development (LID) infiltration options are limited for water balance.

Best efforts have been made by providing a bio-swale enhanced swale system to the east and a gravel swale system, 0.7m deep with a 200mm subdrain along the west boundary to promote some infiltration for water balance.

#### **4.6 FLOOD HAZARD**

The Cranberry Marsh Regional highwater level has been established at 179.80 m in accordance with the Regional Stormwater Management Update & Master SWM Strategy prepared by C.F. Crozier & Associates Inc. (May 2007) as noted by the NVCA. Reference to the approved Cranberry Marsh Flood Storage mapping included in Appendix D.

The NVCA Natural Hazard guidelines note that development is prohibited within the Flood Hazard limits on a property but may consider minor floodplain regularization if removing all development outside the floodplain is not achievable.

The current site plan for the proposed development has been approved by the Town of Collingwood. Between the proposed road, playground and environment protection area, there is limited space for additional flood storage to provide a cut/fill balance. As the site plan has been settled there is no flexibility to manipulate the layout of the site to allow for a cut/fill balance without the loss of units. Considering that some minor regularization to the cut/fill balance maybe acceptable to the NVCA, we provide the following assessment below.

A cut/fill assessment has been prepared to determine the effects of the proposed development on the flood storage provided by the Cranberry Marsh. In the existing conditions a total site area of 2,785m<sup>2</sup> is located within the Cranberry Marsh Floodplain limits with 278.74 m<sup>3</sup> of storage provided within the project site. In the post development condition, the site area within the Floodplain is reduced to 1,382m<sup>2</sup> with the amount of storage reduced to 220.79 m<sup>3</sup> beyond the set development limit, resulting in a 57.95 m<sup>3</sup> storage deficit with no additional mitigation provided within the development limit. By providing a retaining wall at the end of the development turning circle and play area as shown on Plan SG-1, Site Grading an additional 5.8m<sup>3</sup> of Floodplain storage would be available within the development limit reducing the loss in storage further to 52.15m<sup>3</sup>. Although this does not achieve a cut/fill balance, it demonstrates that best efforts have been made to minimize the loss in Floodplain storage based on the settled site plan and development limits approved by the Town of Collingwood. Refer to plans WS-1 & WS-2, Appendix D for the existing and proposed Floodplain storage analysis.



A stage storage relationship for the Cranberry Marsh was included in the Regional Stormwater Management Update & Master SWM Strategy – Tanglewood at Cranberry Trail / Cranberry Creek Watershed – Tanglewood (Sierra Homes) Inc., prepared by Crozier (May 2007). The stage storage relationship is shown in Table 3 and the total storage provided by the Cranberry Marsh is 166,000m<sup>3</sup> during the regional storm event at an elevation of 178.80 m. The project site only includes 0.2785 ha of the 37.7 ha area (0.007%) used as storage by the Cranberry Marsh during the Regional event. Interpolating based on the stage storage relationship the deficit of 52.15 m<sup>3</sup> would be equivalent to the Regional Flood elevation in the Marsh to increase by approx.. 0.001 m or 1 mm (to 179.801 m).

As our development limits have been set through the Town approval stages and the loss in storage negligible, the impact to the overall Cranberry Marsh Floodplain storage would not result in any additional flood impacts to adjacent and neighbouring properties.

**Table 3: Cranberry Marsh Stage Storage Relationship**

STAGE (M)	DEPTH (M)	INUNDATED AREA (HA)	STORAGE (M <sup>3</sup> )
178.80	0.00	0	0
179.10	0.30	13,000	13,000
179.30	0.50	35,000	35,000
179.50	0.70	73,000	73,000
179.70	0.90	137,000	137,000
179.80	1.00	166,000	166,000

*Note: Values taken from Regional Stormwater Management Update & Master SWM Strategy – Tanglewood at Cranberry Trail / Cranberry Creek Watershed – Tanglewood (Sierra Homes) Inc., Table 2, prepared by Crozier (May 2007)*

In addition, the NVCA Flood Hazard guidelines note that all proposed units must be adequately flood proofed to a minimum elevation of 180.10 m (0.30 m above the Marsh high water level). This will be achieved by raising the site through the placement of fill. Refer to SG-1, Site Grading Plan.





## 5 Siltation & Erosion Plan

Siltation and erosion controls will be implemented for all construction activities, including topsoil stripping, material stockpiling, road construction and grading operations as per ESC-1 and ESC-2. Detailed erosion and sediment control measures to be implemented during and after construction are summarized as follows:

- heavy duty silt fence will be erected before the commencement of any grading operations to control sediment movement;
- a construction vehicle entrance will be constructed and maintained consisting of a stone mud mat to reduce off-site tracking of material;
- regular inspection of control measures will be instituted, and repairs will be made as necessary;
- temporary swales, sediment trap and rock flow check dams will be constructed to control runoff during construction; and
- long term siltation and erosion control will be enhanced with a revegetation strategy for disturbed areas.




## 6 Summary

The proposed residential development will consist of 26 townhome units in Collingwood connected by a private road and cul-de-sac.

Existing drainage patterns will generally be maintained, with stormwater runoff conveyed via a road network to an enhanced grassed ditch to provide quality control for the site. Surface runoff towards the north will outlet into the Highway 26 roadside ditch, with post-development flow rates matching pre-development flow rates. Surface runoff towards the south will outlet into the Cranberry Marsh with no quantity control. The development is not anticipated to significantly impact the storage and attenuation provided by the Cranberry Marsh to its drainage area.

Siltation and erosion control will be provided with the proper construction mitigation efforts. Long-term erosion control will be enhanced with an effective revegetation strategy.




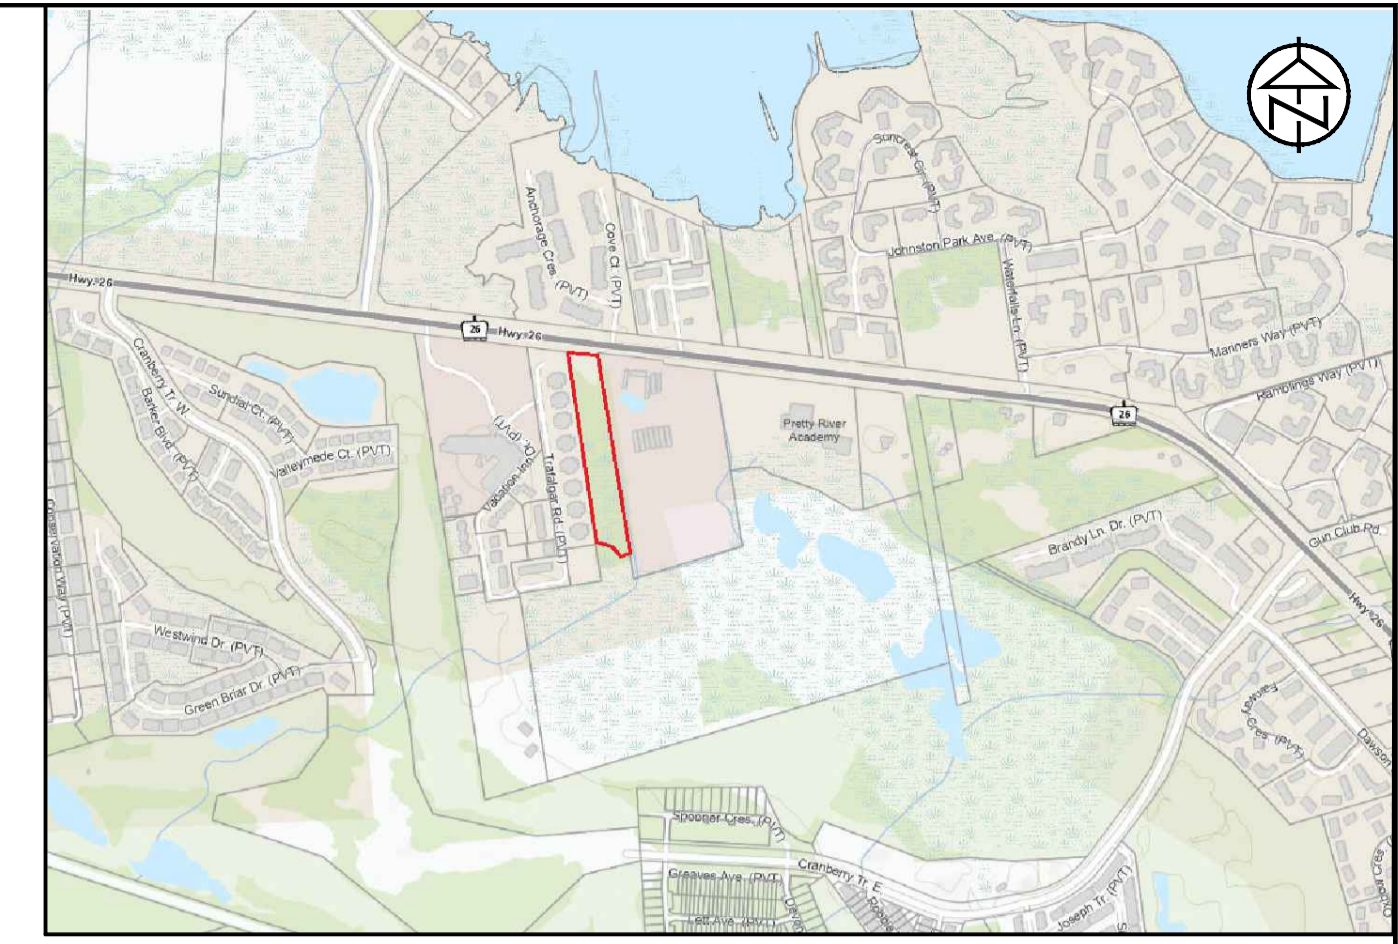

KEY PLAN

### GREENTREE GARDENS & EMPORIUM

### GEORGAIN BAY HOTEL

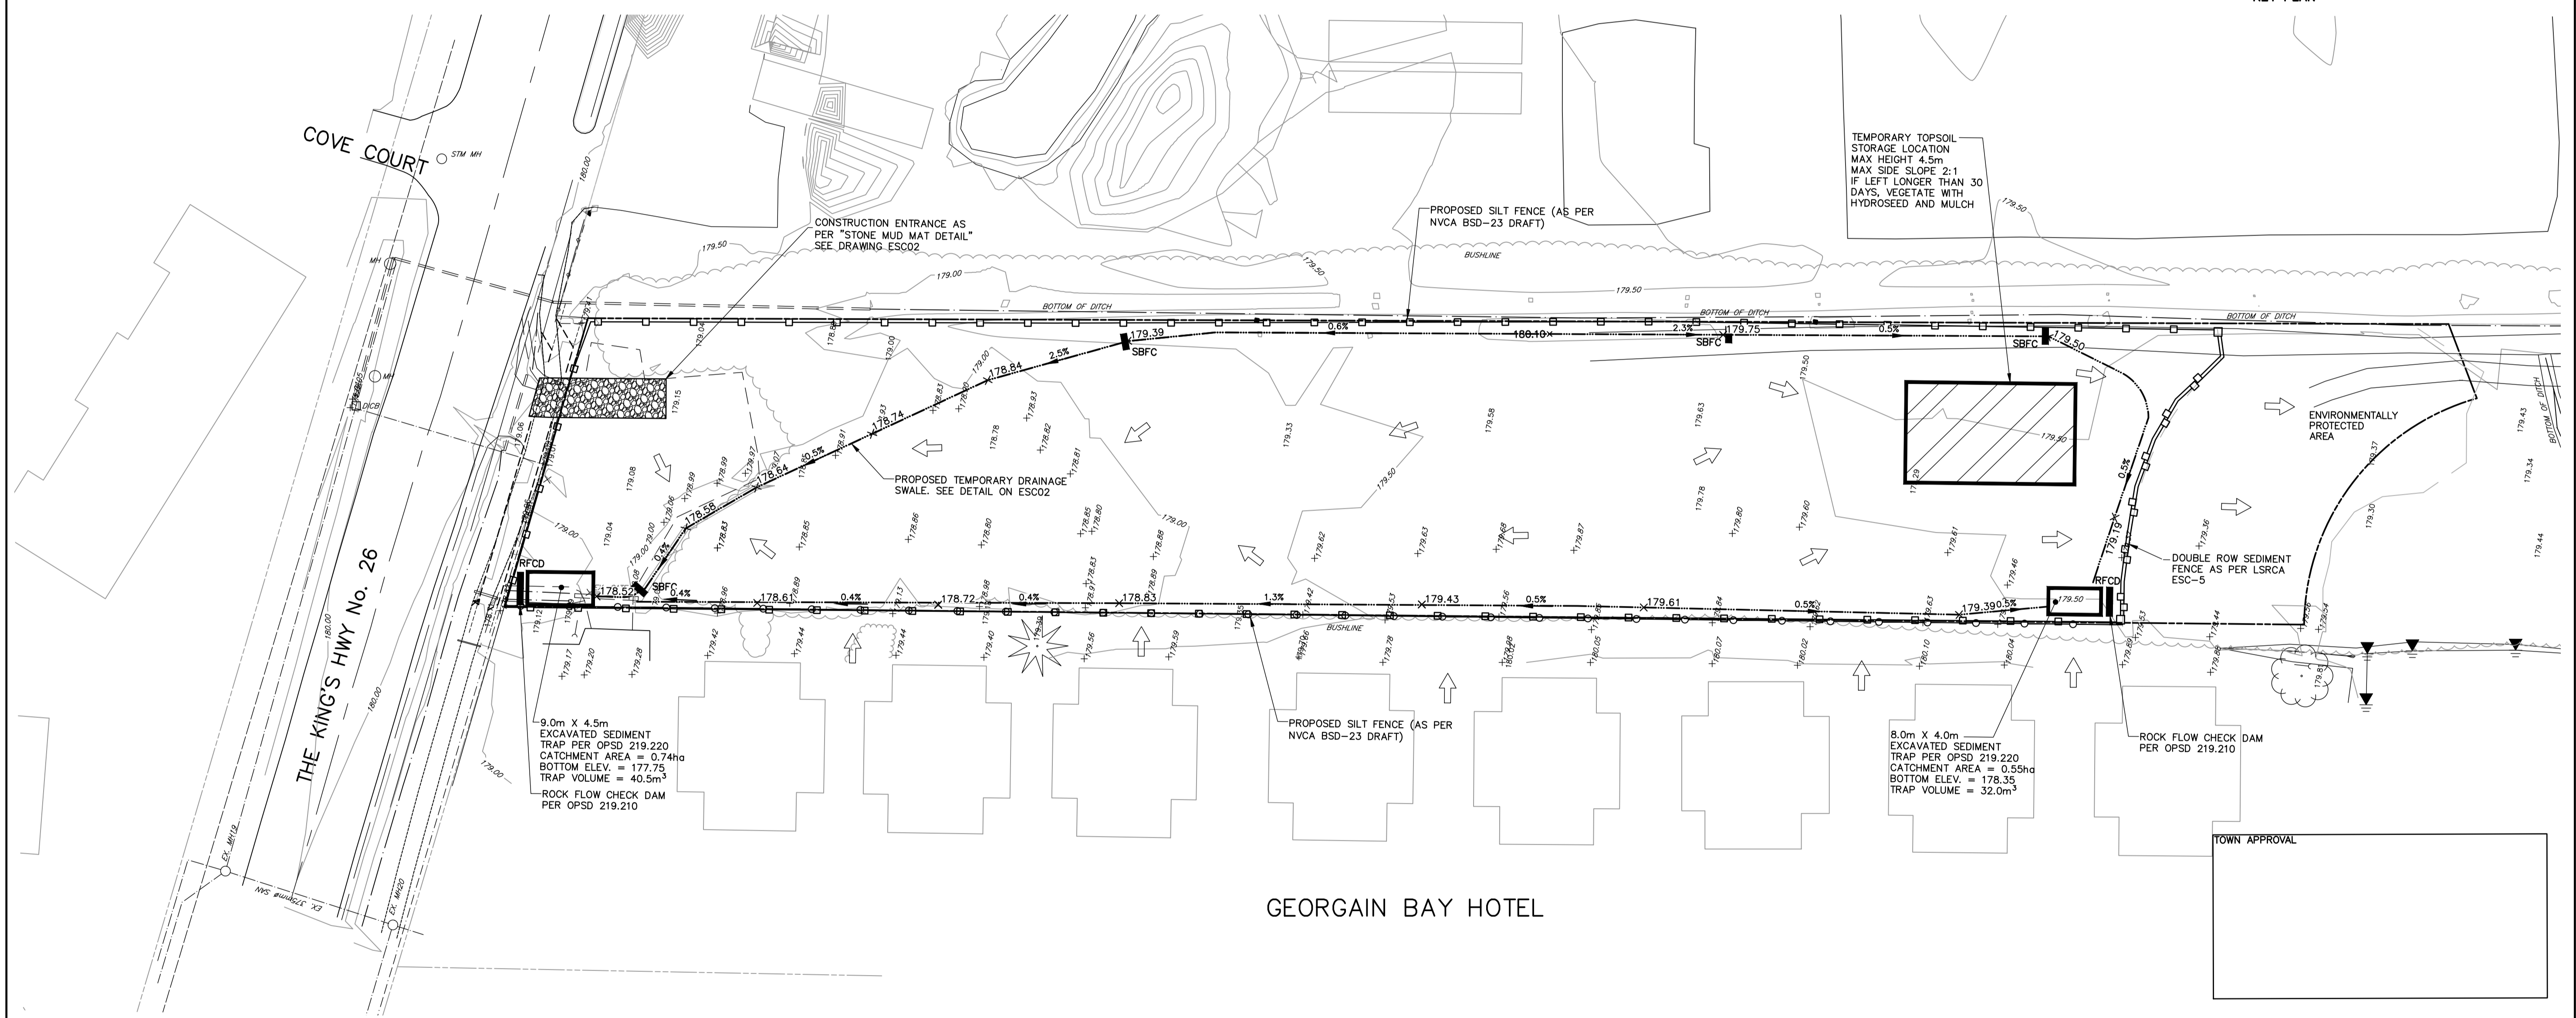

TEMPORARY TOPSOIL STORAGE LOCATION  
 MAX HEIGHT 4.5m  
 MAX SIDE SLOPE 2:1  
 IF LEFT LONGER THAN 30 DAYS, VEGETATE WITH HYDROSEED AND MULCH

9.0m X 4.5m EXCAVATED SEDIMENT TRAP PER OPSD 219.220  
 CATCHMENT AREA = 0.74ha  
 BOTTOM ELEV. = 177.75  
 TRAP VOLUME = 40.5m<sup>3</sup>  
 ROCK FLOW CHECK DAM PER OPSD 219.210

8.0m X 4.0m EXCAVATED SEDIMENT TRAP PER OPSD 219.220  
 CATCHMENT AREA = 0.55ha  
 BOTTOM ELEV. = 178.35  
 TRAP VOLUME = 32.0m<sup>3</sup>

ROCK FLOW CHECK DAM PER OPSD 219.210

TOWN APPROVAL


LEGEND	
PROPOSED STRAW BALE FLOW CHECK (AS PER OPSD 219.210)	SBFC
PROPOSED ROCK FLOW CHECK (AS PER OPSD 219.180)	RFCD
PROPOSED HEAVY DUTY SILT FENCE (AS PER NVCA BSD-23 DRAFT)	—□—□—
PROPOSED SWALE / DITCH	—0.5%—
EXISTING OVERLAND FLOW	→

**DISCLAIMER AND COPYRIGHT**  
 CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
 TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
 ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.

**NOTES**  
 LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6  
 TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.







No.	REVISION DESCRIPTION	DATE
1.	1ST SUBMISSION	03/22
2.	2ND SUBMISSION	12/22
3.	3RD SUBMISSION	07/23
4.	4TH SUBMISSION	12/23

ENGINEER STAMP  


**CRANBERRY MARSH ESTATES**  
 TOWN OF COLLINGWOOD  
**EROSION AND SEDIMENT CONTROL PLAN**

**TATHAM ENGINEERING**

DESIGN: KG	FILE: 120181	DWG:
DRAWN: KB/SBU/AP	DATE: MAR 2022	<b>ESC-1</b>
CHECK: DC	SCALE: 1:500	

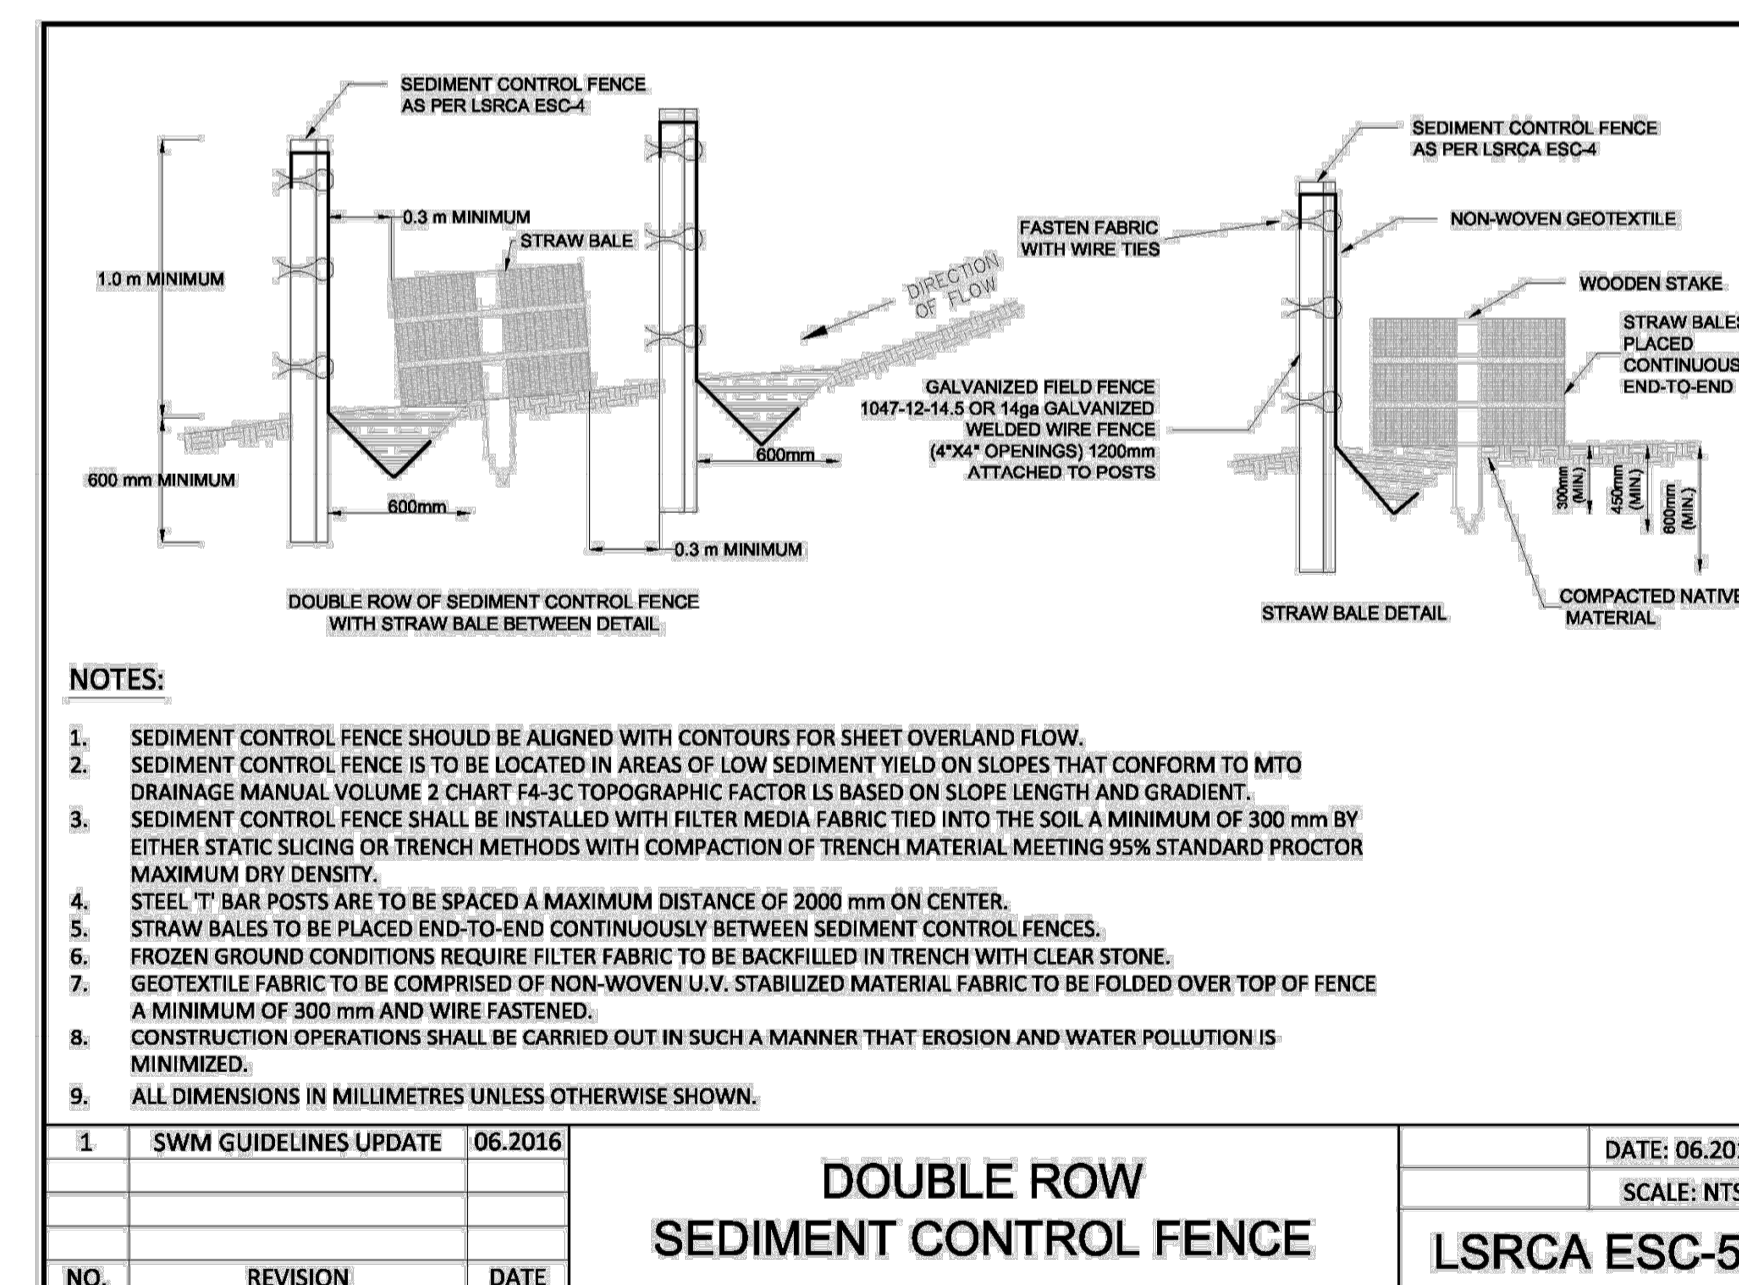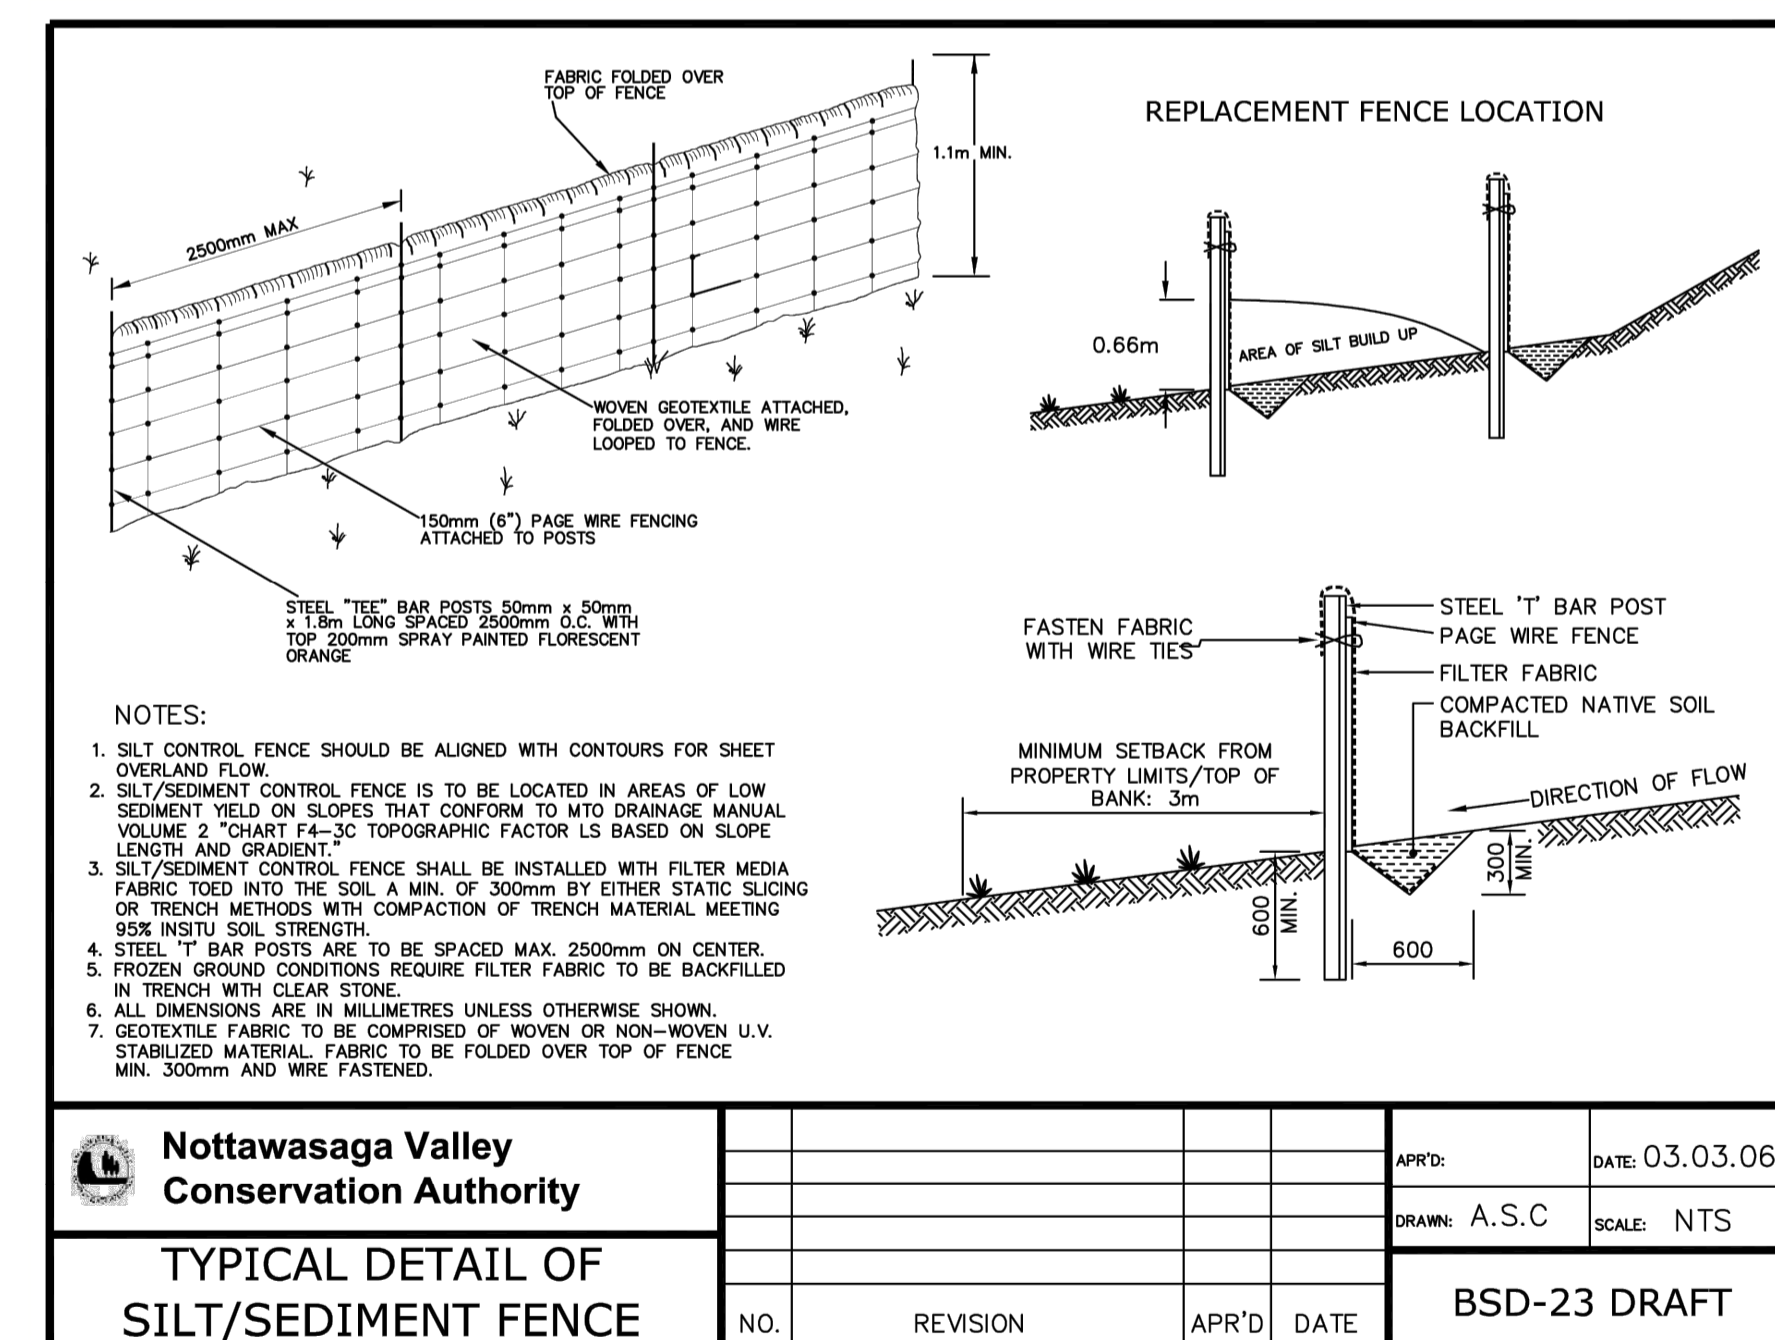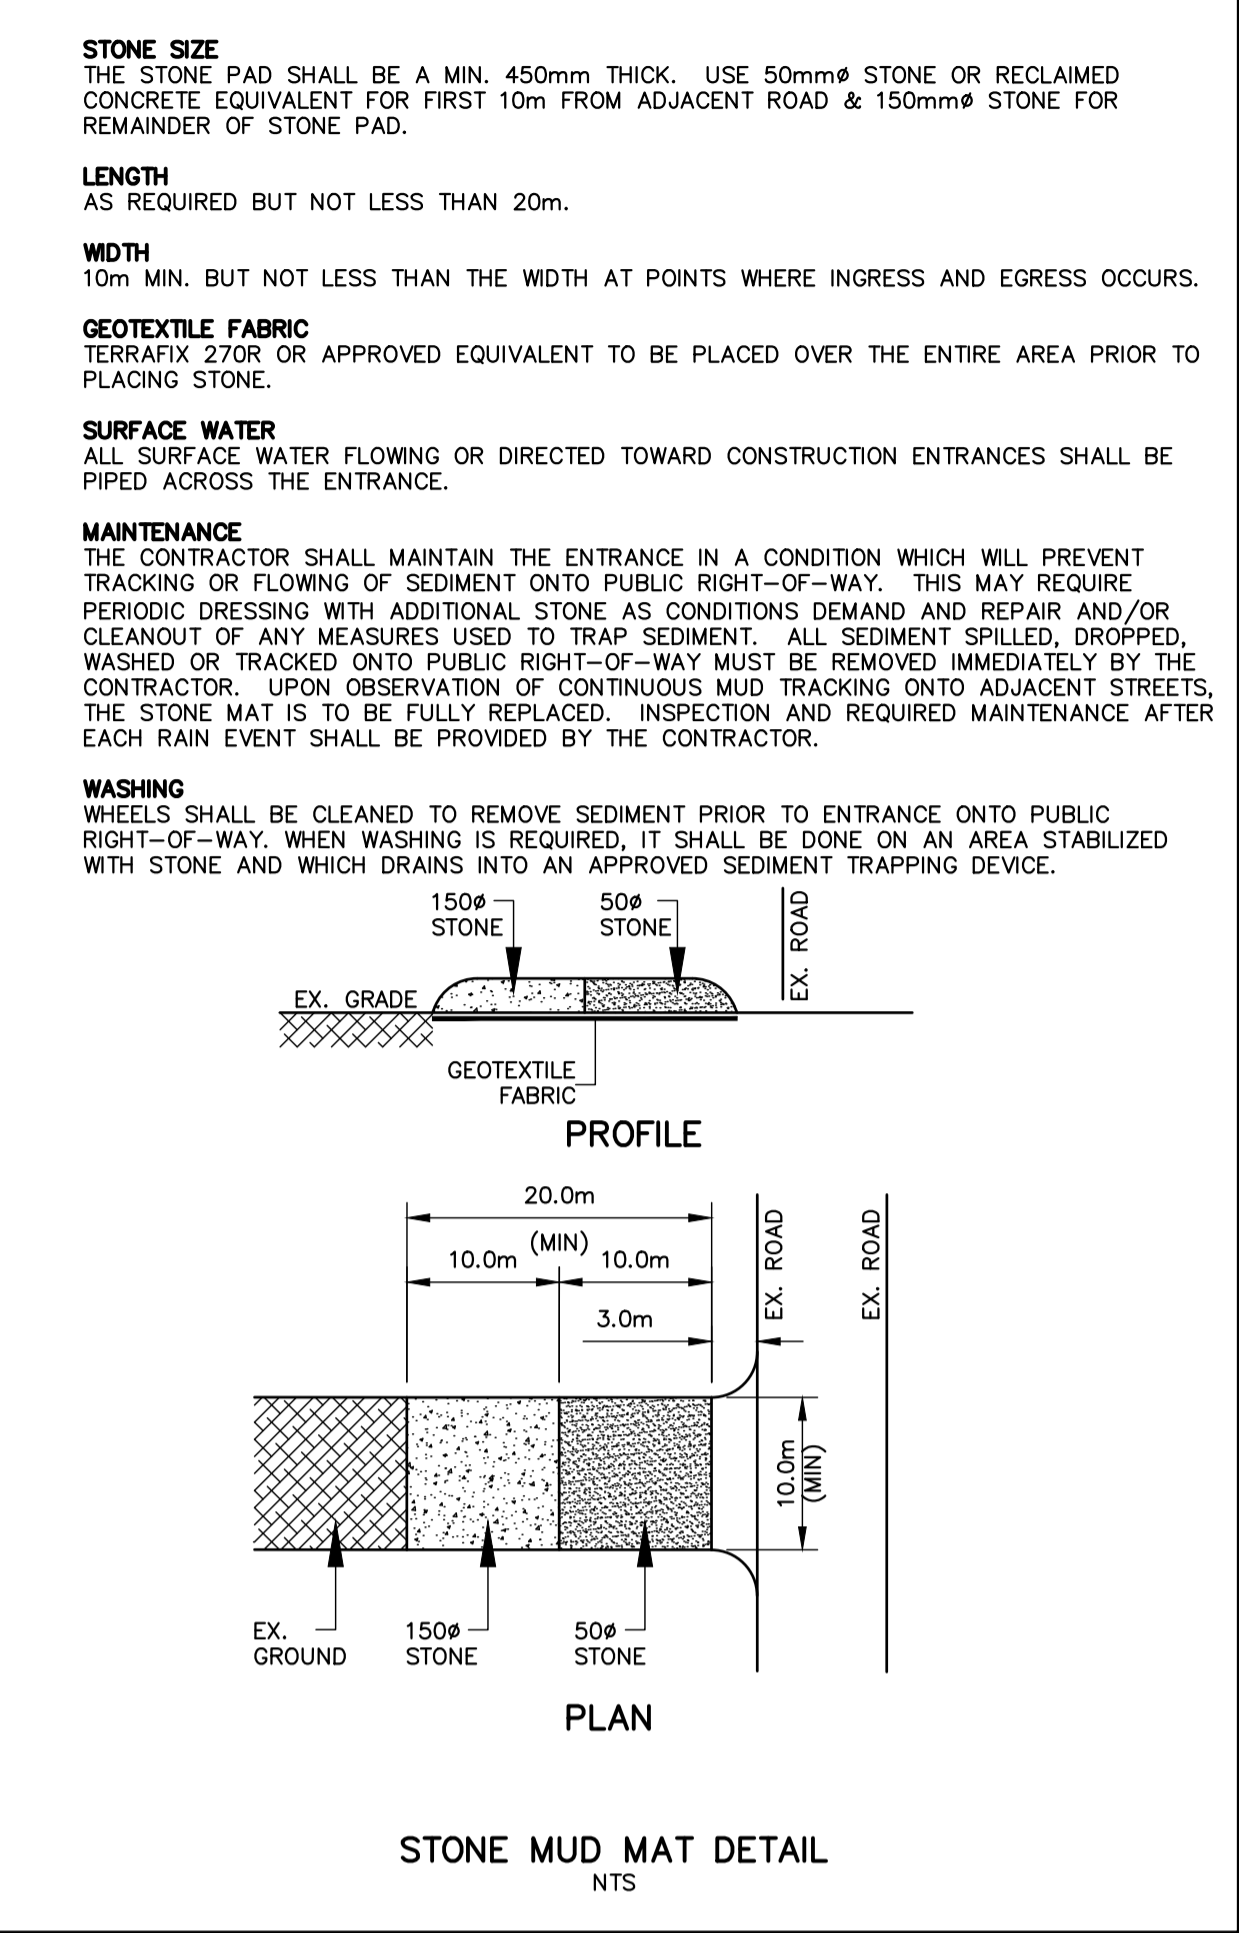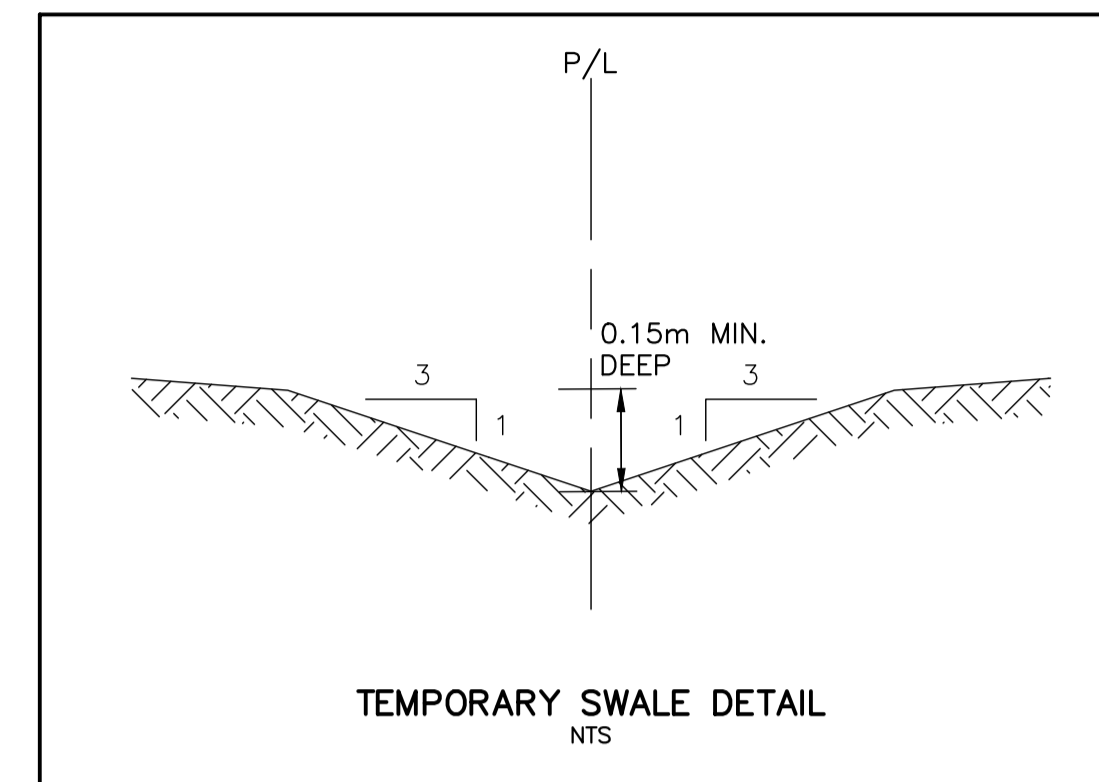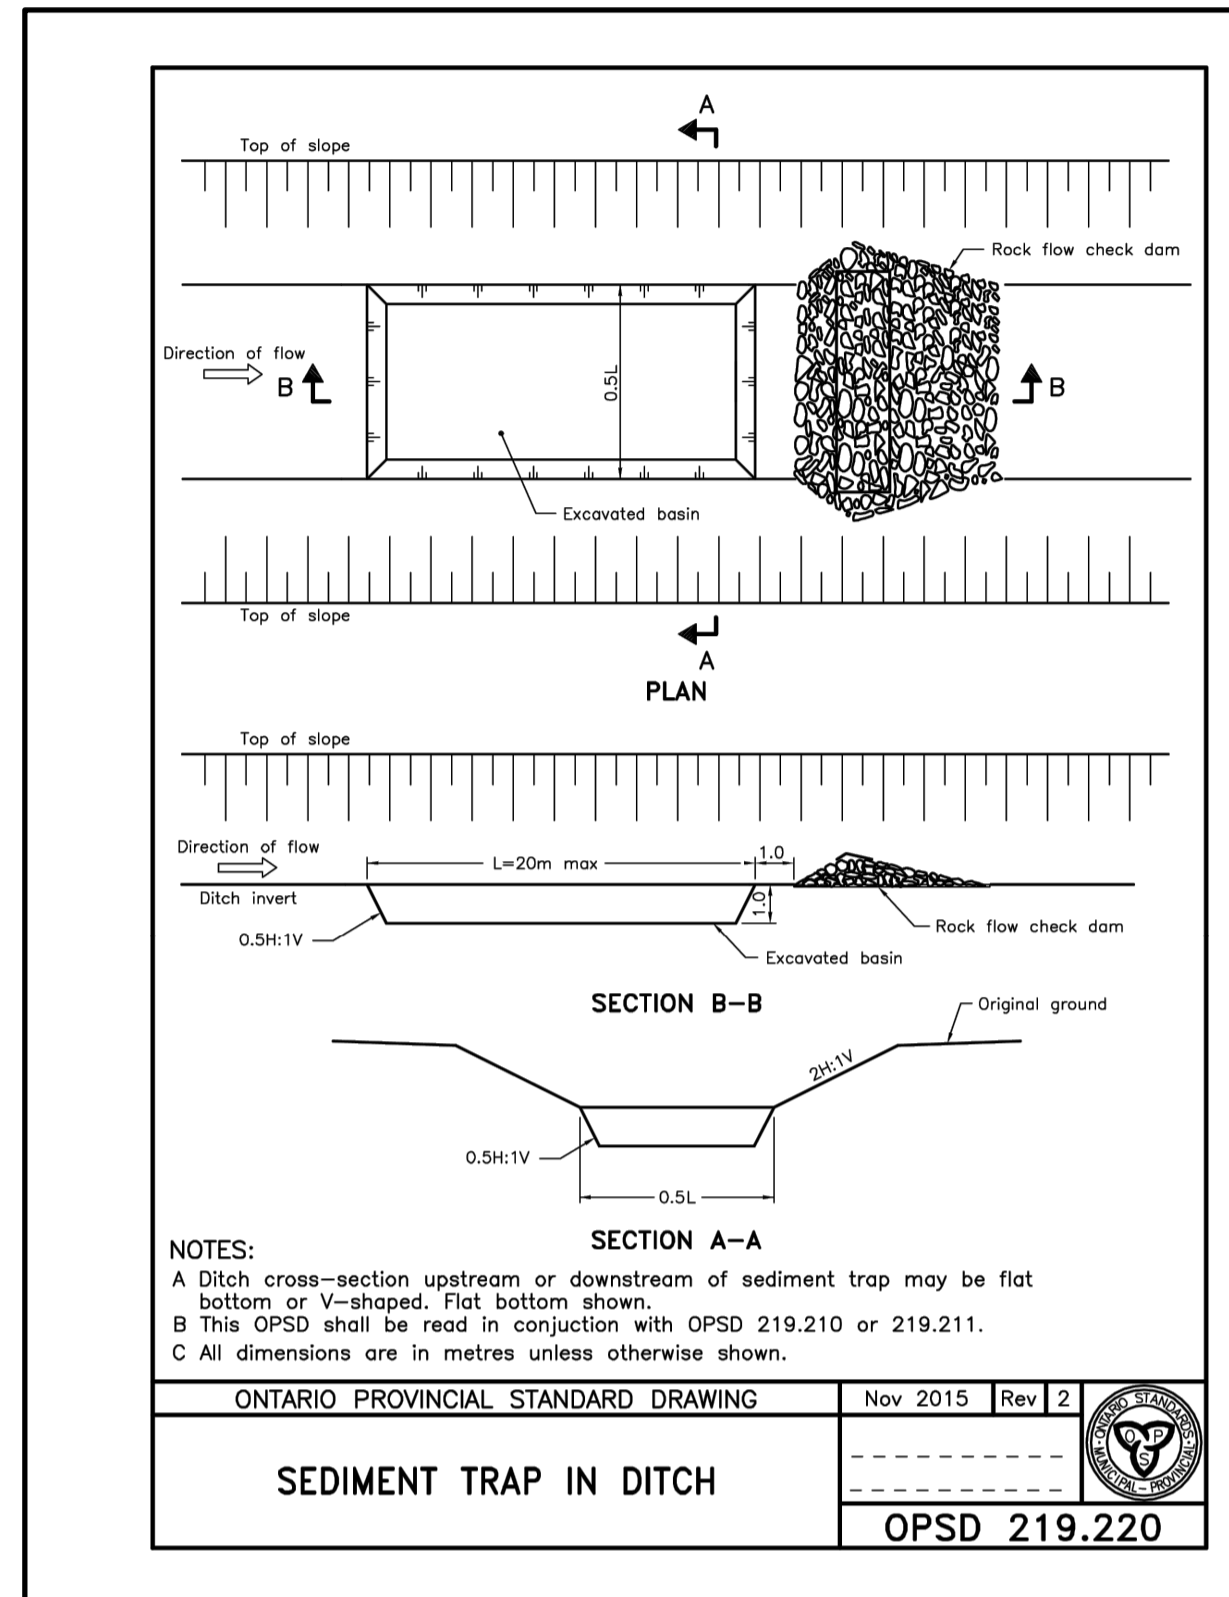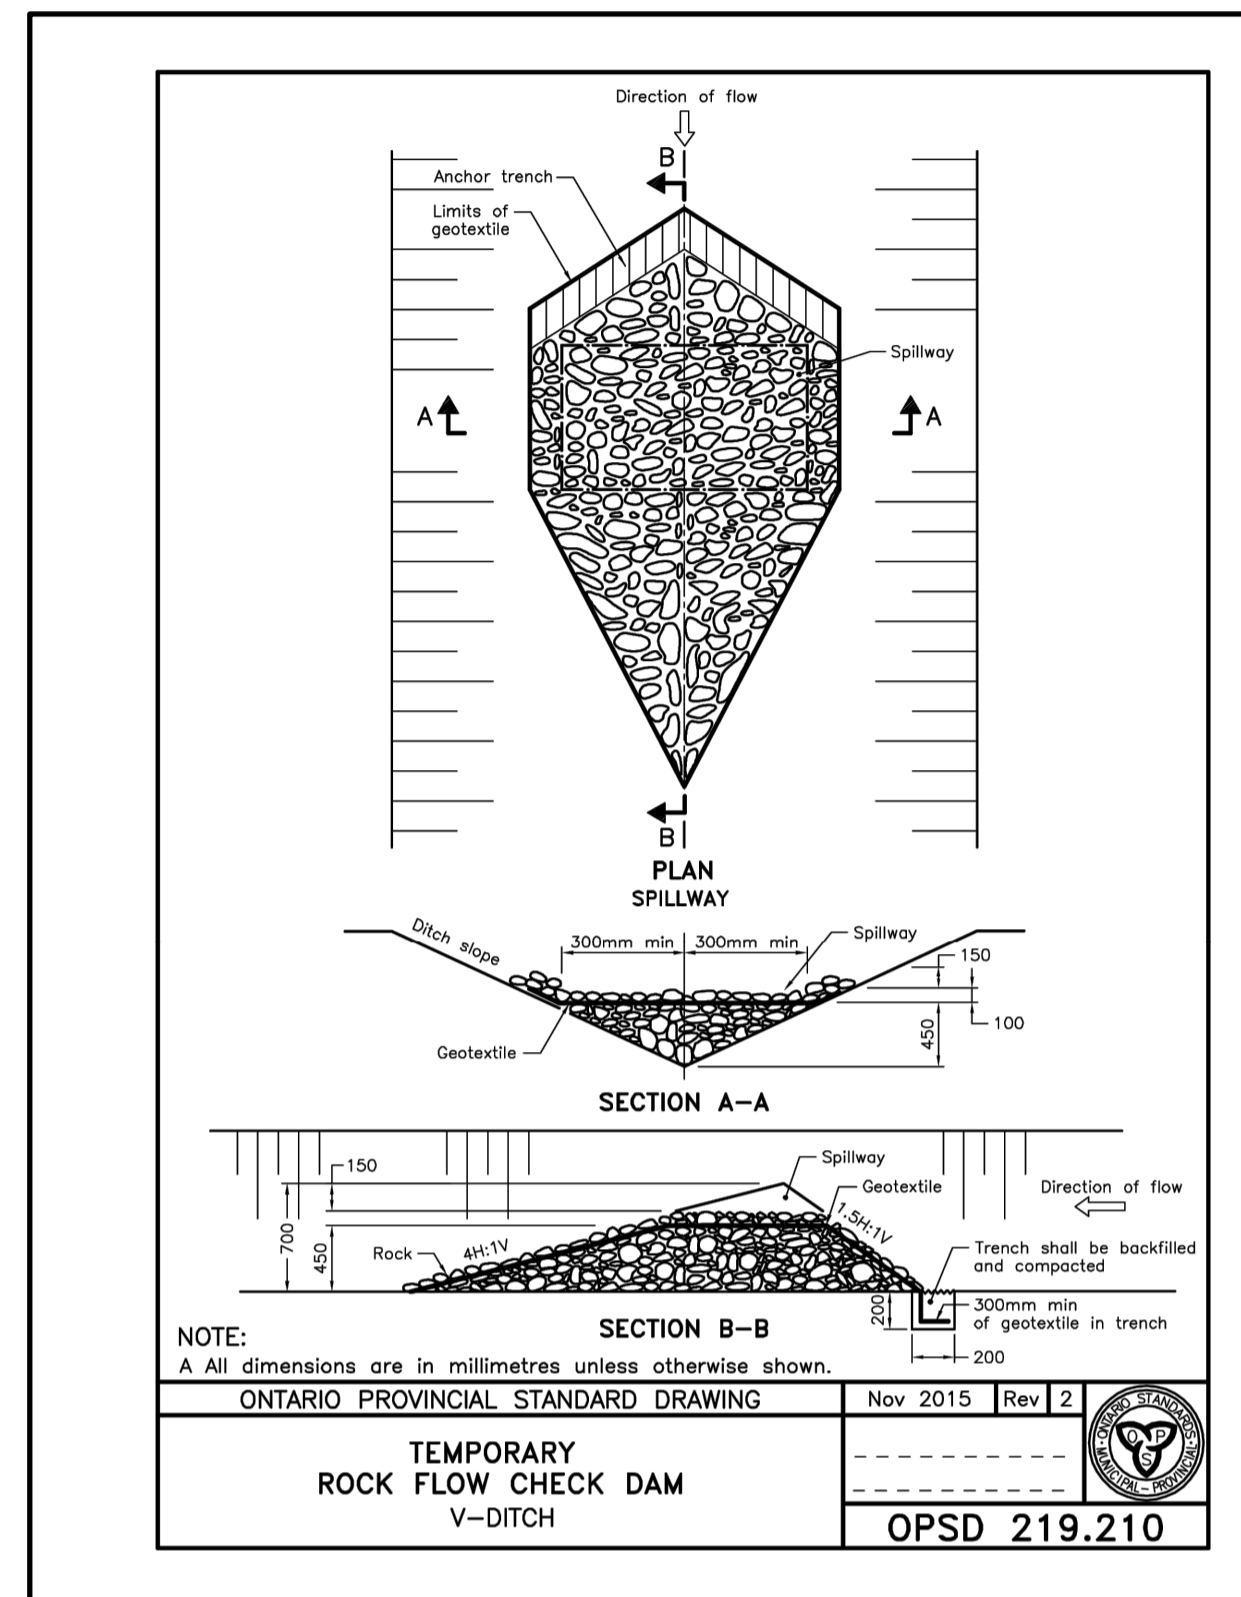

- NOTES**
- ALL SEDIMENT AND EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. SEDIMENT AND EROSION CONTROL MEASURES THAT ARE DESIGNED TO CONTROL RUNOFF FROM SPECIFIC AREAS MUST BE INSTALLED PRIOR TO ANY DISTURBANCE OF THAT PART OF THE SITE. THE LOCATION OF ALL SILTATION AND EROSION CONTROL WORKS TO BE REVIEWED ON SITE AND MAY BE REVISED AS DIRECTED BY THE ENGINEER.
  - THE CONTRACTOR MAY CONSIDER ALTERNATIVE SEDIMENT AND EROSION CONTROL MEASURES. SUCH MEASURES MUST BE PRESENTED IN WRITING TO THE ENGINEER FOR APPROVAL OF THE TOWN AND NOTTAWASAGA VALLEY CONSERVATION AUTHORITY.
  - THE CONTRACTOR SHALL HAVE MATERIALS AVAILABLE ON SITE TO REPAIR SEDIMENT AND EROSION CONTROL MEASURES IN THE EVENT OF UNFORESEEN CONDITIONS SUCH AS HIGH WATER, EXTREME RAINFALL EVENTS, ETC.
  - ALL EROSION AND SEDIMENT CONTROL MEASURES MUST BE INSPECTED, CLEANED AND MAINTAINED BY THE CONTRACTOR AFTER EACH STORM EVENT. ALL WORKS WILL BE INSPECTED BY THE ENGINEER BI-WEEKLY AND AFTER EACH MAJOR STORM EVENT.
  - CONSTRUCTION OF ALL SILTATION AND EROSION CONTROL WORK IS TO BE IN ACCORDANCE WITH THE FOLLOWING STEPS:
    - INSTALL NEW OR MAINTAIN EXISTING STONE MUD MAT AS PER DETAIL.
    - INSTALL SILT FENCE AS PER NVCA STANDARDS (BSD-23).
    - INSTALL TEMPORARY CATCH BASIN SEDIMENT TRAPS ON ALL NEW AND EXISTING CATCH BASINS. SEDIMENT TRAPS TO BE RECTANGULAR BY LAYFIELD OR APPROVED EQUAL. ALL CATCH BASINS TO REMAIN SCREENED UNTIL BASE COURSE ASPHALT IS PLACED AND LOT GRADING IS COMPLETE.
  - ALL CONSTRUCTION VEHICLES TO ACCESS SITE USING THE DESIGNATED CONSTRUCTION ACCESS POINTS.
  - EROSION AND SEDIMENT CONTROL MEASURES TO BE REMOVED BY THE CONTRACTOR ONCE GROUND COVER IS ESTABLISHED AND LANDSCAPING IS COMPLETE AND APPROVED BY THE ENGINEER.
  - STOCKPILE LOCATIONS ARE TO BE APPROVED BY THE ENGINEER.
  - PROVIDE FENCE OR APPROVED EQUAL ACROSS ALL CONSTRUCTION ACCESSES DURING PERIODS OF INACTIVITY.
  - CONSTRUCTION AREAS THAT EXCEED 30 DAYS OF INACTIVITY SHALL BE STABILIZED BY SEEDING IN ACCORDANCE WITH THE NOTTAWASAGA VALLEY CONSERVATION AUTHORITY'S TECHNICAL DESIGN GUIDELINES, STANDARDS AND POLICIES FOR SILTATION AND EROSION CONTROL. CONSTRUCTION CONTROL REQUIREMENTS, NOTES 1, 2 AND 3 AND/OR AS DIRECTED BY THE TOWN. THIS IS TO INCLUDE STOCKPILES OF FILL AND TOPSOIL.

TOWN APPROVAL

**DISCLAIMER AND COPYRIGHT**

CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.

TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**

ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 161.032 METRES.

**NOTES**

LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6

TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE	ENGINEER STAMP
1.	1ST SUBMISSION	03/22	
2.	2ND SUBMISSION	12/22	
3.	3RD SUBMISSION	07/23	
4.	4TH SUBMISSION	12/23	

**CRANBERRY MARSH ESTATES**  
TOWN OF COLLINGWOOD

**EROSION AND SEDIMENT CONTROL DETAILS**

DESIGN: KG  
FILE: 120181  
DRAWN: KH/SBU/AP  
DATE: MAR 2022  
CHECK: DC  
SCALE: N.T.S.

**ESC-2**

**TATHAM ENGINEERING**

DESIGN: KG  
FILE: 120181  
DRAWN: KH/SBU/AP  
DATE: MAR 2022  
CHECK: DC  
SCALE: N.T.S.

**ESC-2**

**LEGEND**

AREA BOUNDARY ————

AREA IDENTIFICATION NUMBER ———— 101


AREA IN HECTARES ———— 1.40 0.25

RUNOFF COEFFICIENT ————

EXISTING MAJOR OVERLAND FLOW DIRECTION →

EXISTING DITCH FLOW DIRECTION ▷

TOWN APPROVAL

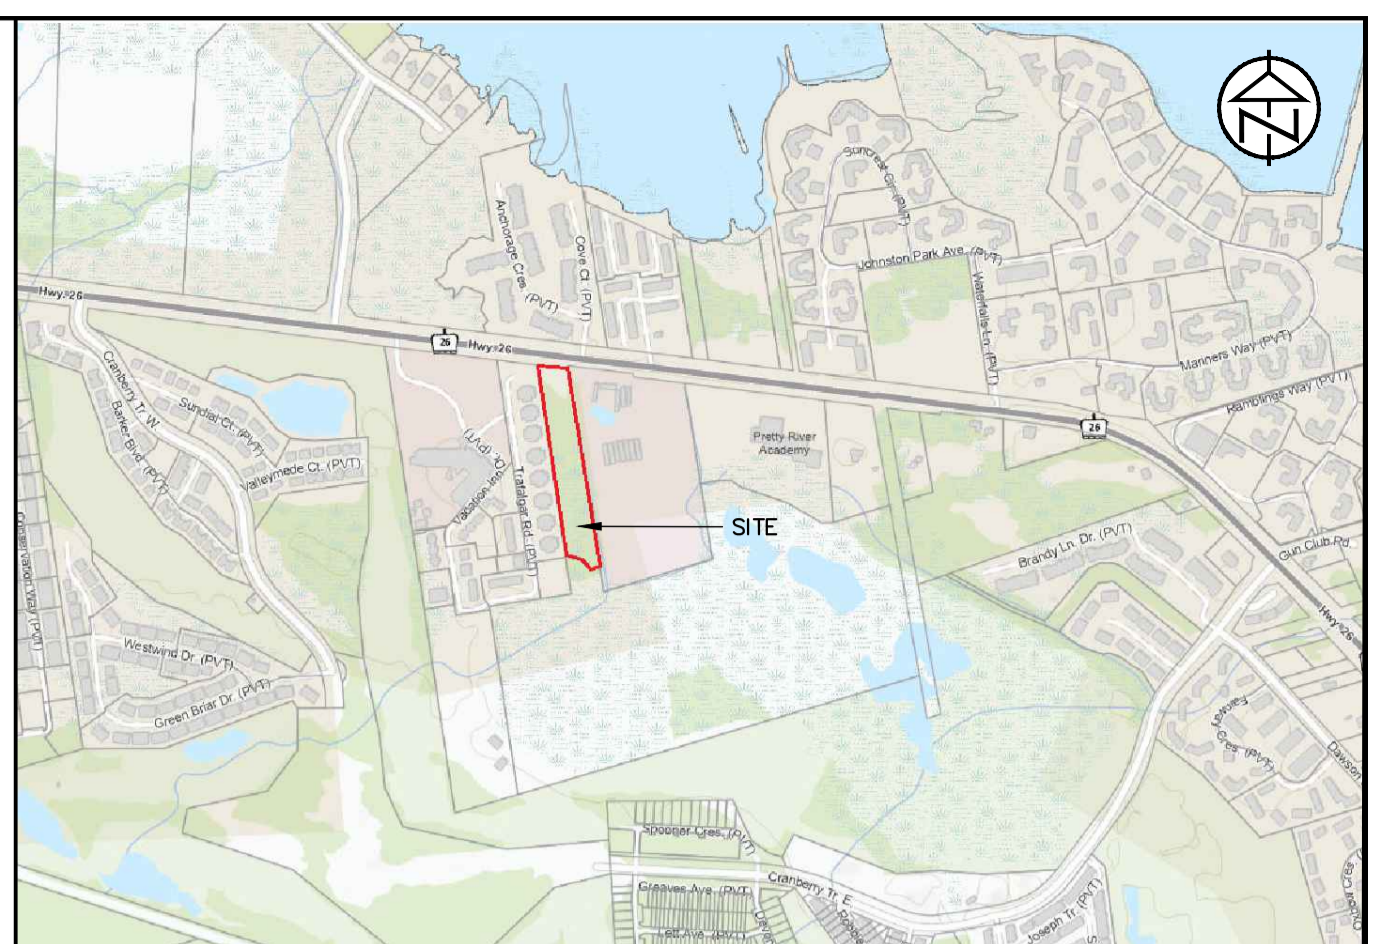

KEY PLAN



**DISCLAIMER AND COPYRIGHT**

CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.

TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**

ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.

**NOTES**

LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6

TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE
1.	1ST SUBMISSION	03/22
2.	2ND SUBMISSION	12/22
3.	3RD SUBMISSION	07/23
4.	4TH SUBMISSION	12/23

ENGINEER STAMP


**CRANBERRY MARSH ESTATES**  
TOWN OF COLLINGWOOD

**PRE-DEVELOPMENT DRAINAGE PLAN**

**TATHAM ENGINEERING**

DESIGN: KG	FILE: 120181	DWG:
DRAWN: KH/SBU/AP	DATE: DEC 2021	<b>DP-1</b>
CHECK: DC	SCALE: 1:500	


LEGEND	
AREA BOUNDARY	
AREA IDENTIFICATION NUMBER	
AREA IN HECTARES	1.40 65%
CN VALUE/PERCENT IMPERVIOUS	
PROPOSED MAJOR OVERLAND FLOW DIRECTION	
EXISTING MAJOR OVERLAND FLOW DIRECTION	
PROPOSED FLOW DIRECTION	

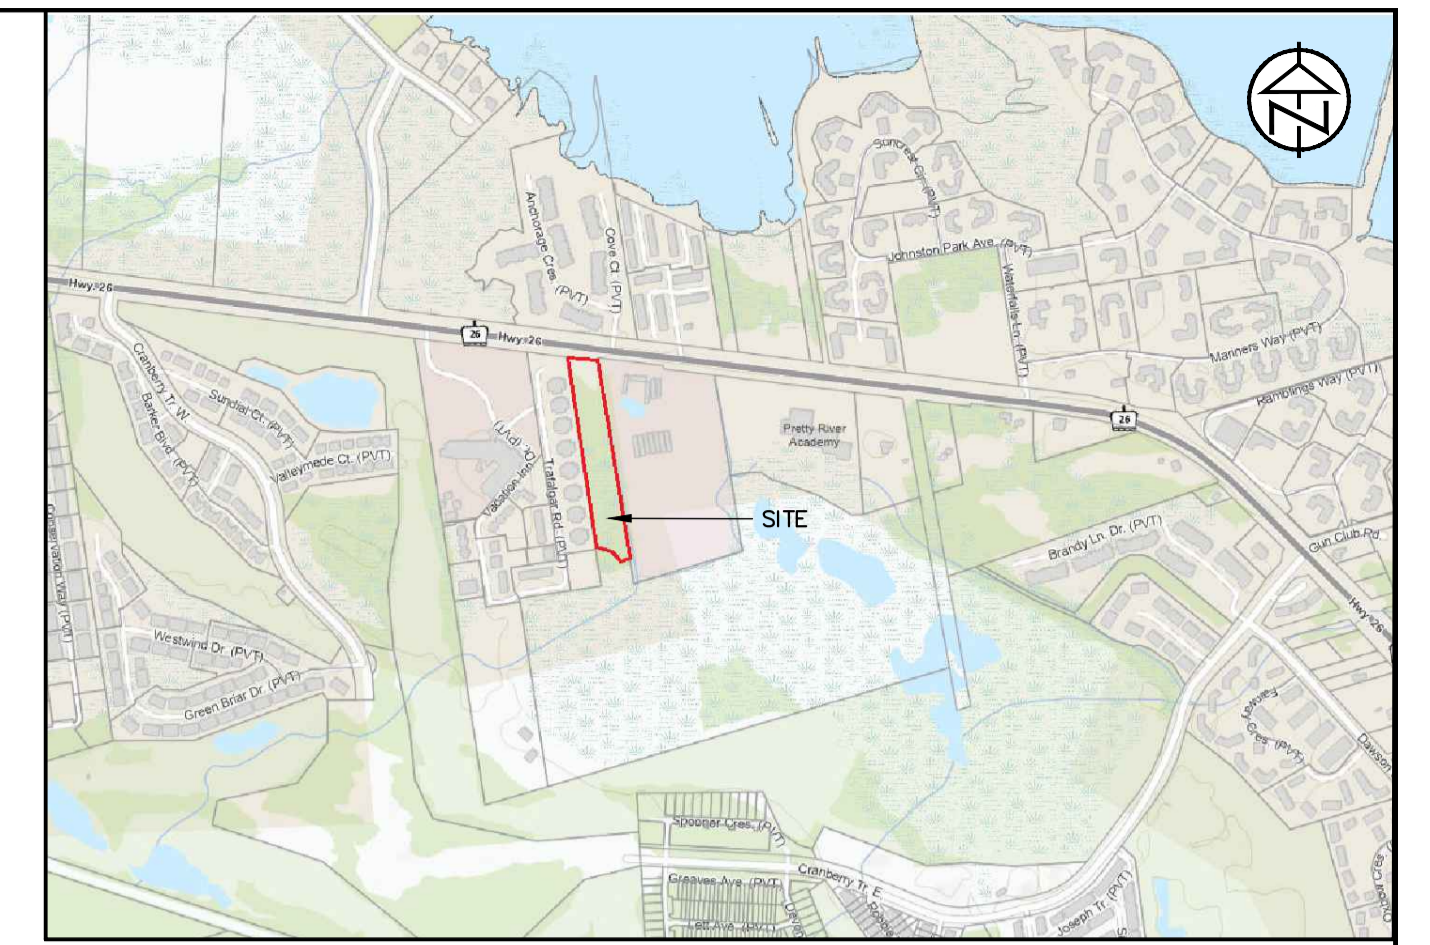

KEY PLAN

## GREENTREE GARDENS & EMPORIUM

TOWN APPROVAL

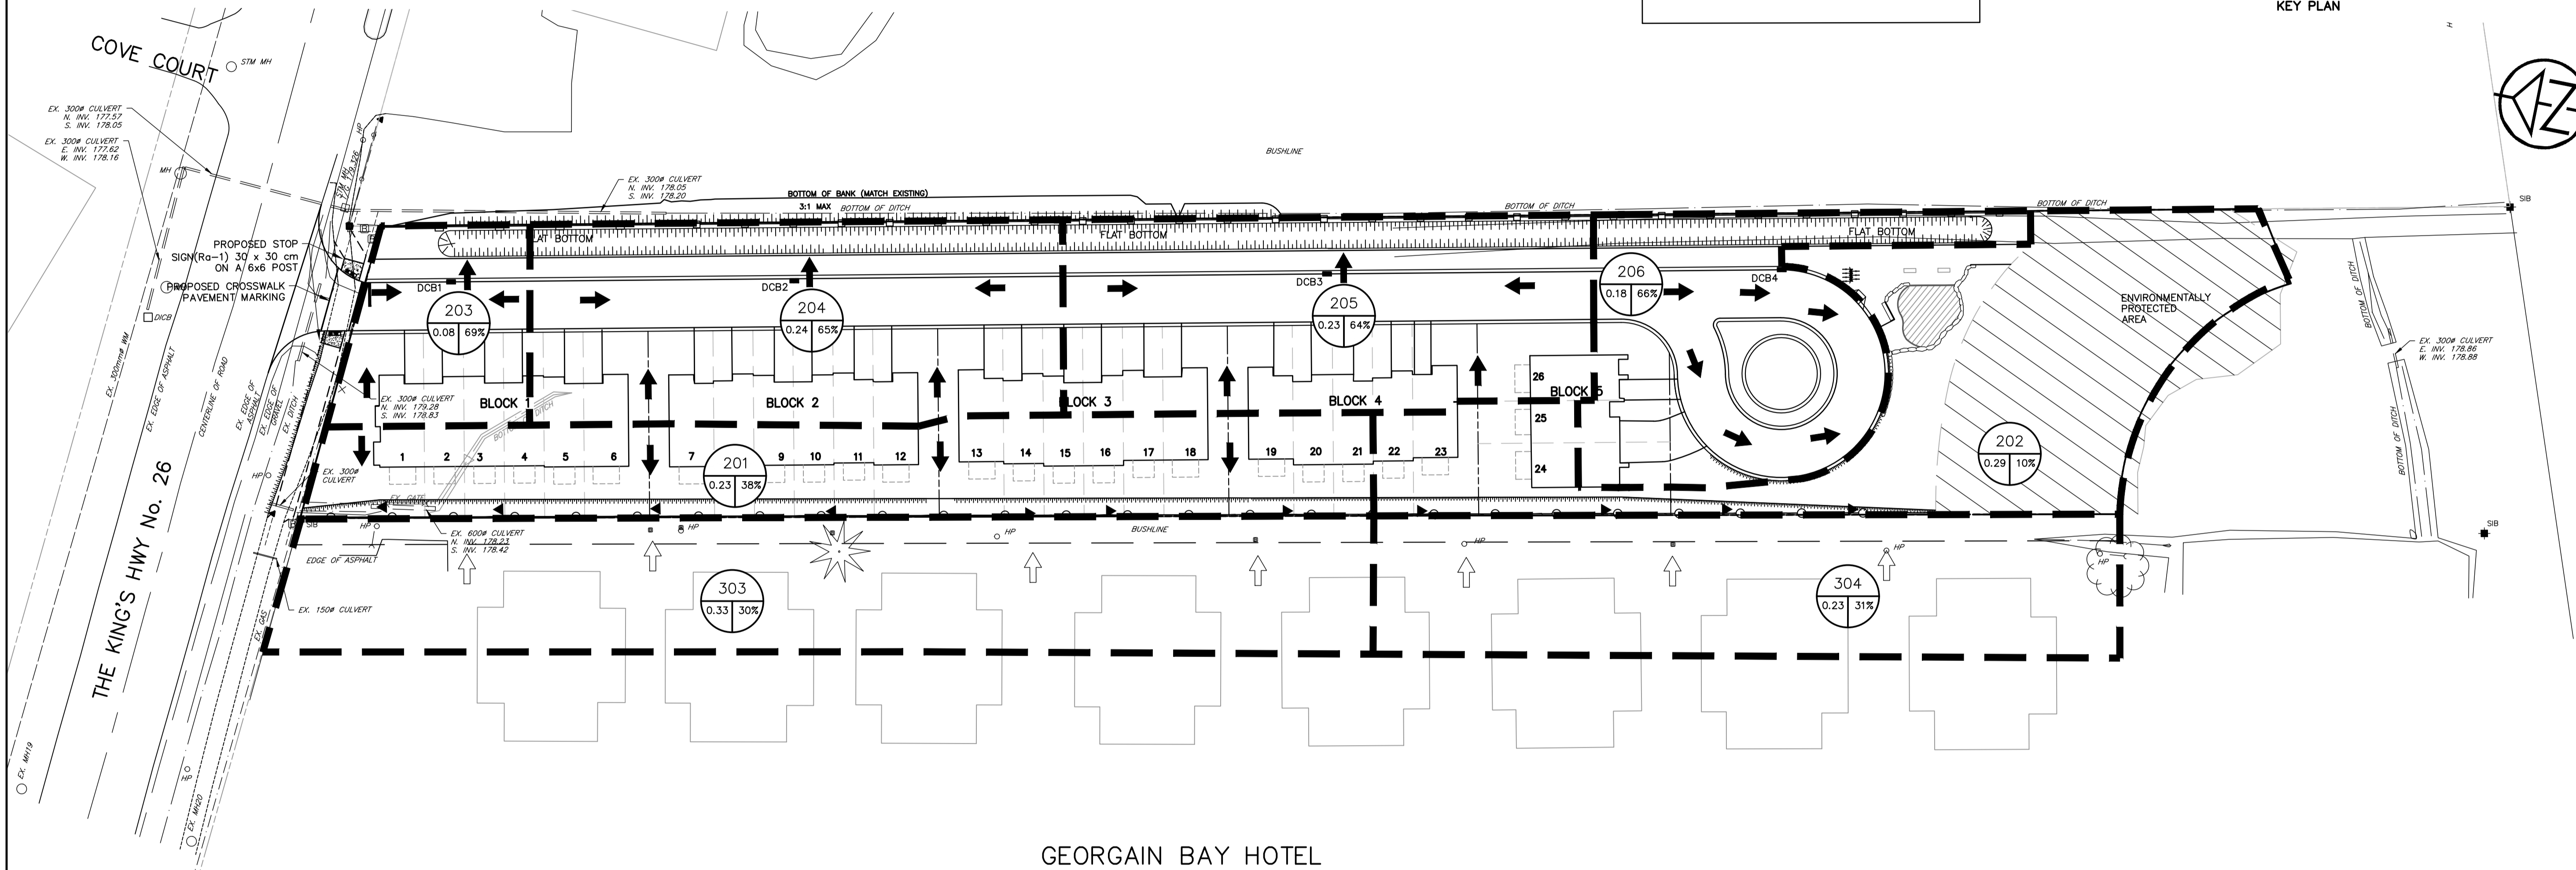

## GEORGAIN BAY HOTEL

**DISCLAIMER AND COPYRIGHT**  
 CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
 TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
 ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.



**NOTES**  
 LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6  
 TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE
1.	1ST SUBMISSION	03/22
2.	2ND SUBMISSION	12/22
3.	UPDATE TO IMPERVIOUS VALUES	01/23
4.	3RD SUBMISSION	07/23
5.	4TH SUBMISSION	12/23


ENGINEER STAMP

**CRANBERRY MARSH ESTATES**  
 TOWN OF COLLINGWOOD  
**POST-DEVELOPMENT DRAINAGE PLAN**

		DESIGN: KG	FILE: 120181	DWG:
		DRAWN: KH/SBU/AP	DATE: FEB 2022	<b>DP-2</b>
CHECK: DC	SCALE: 1:500			

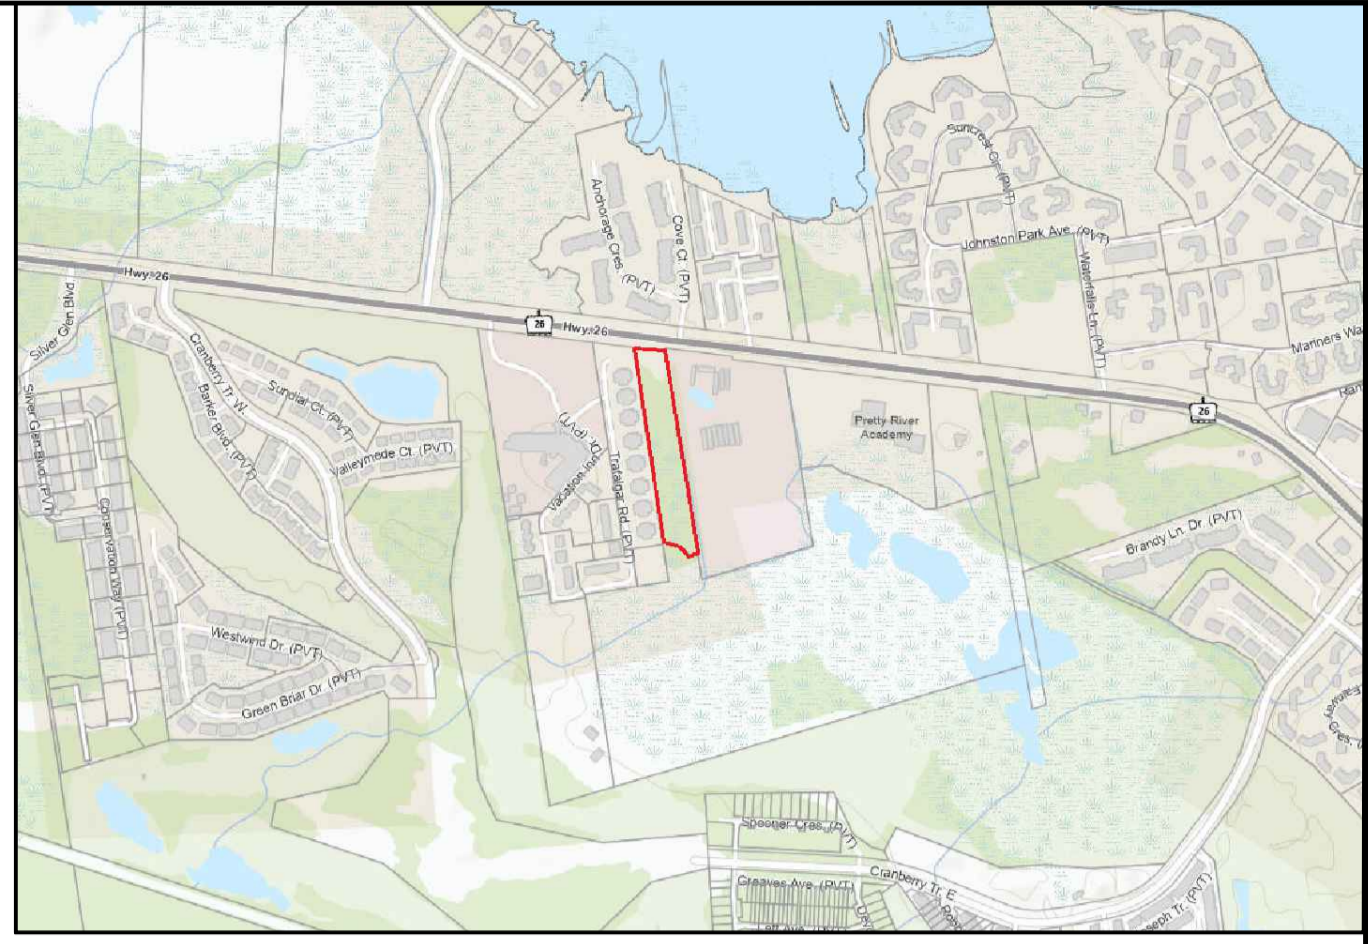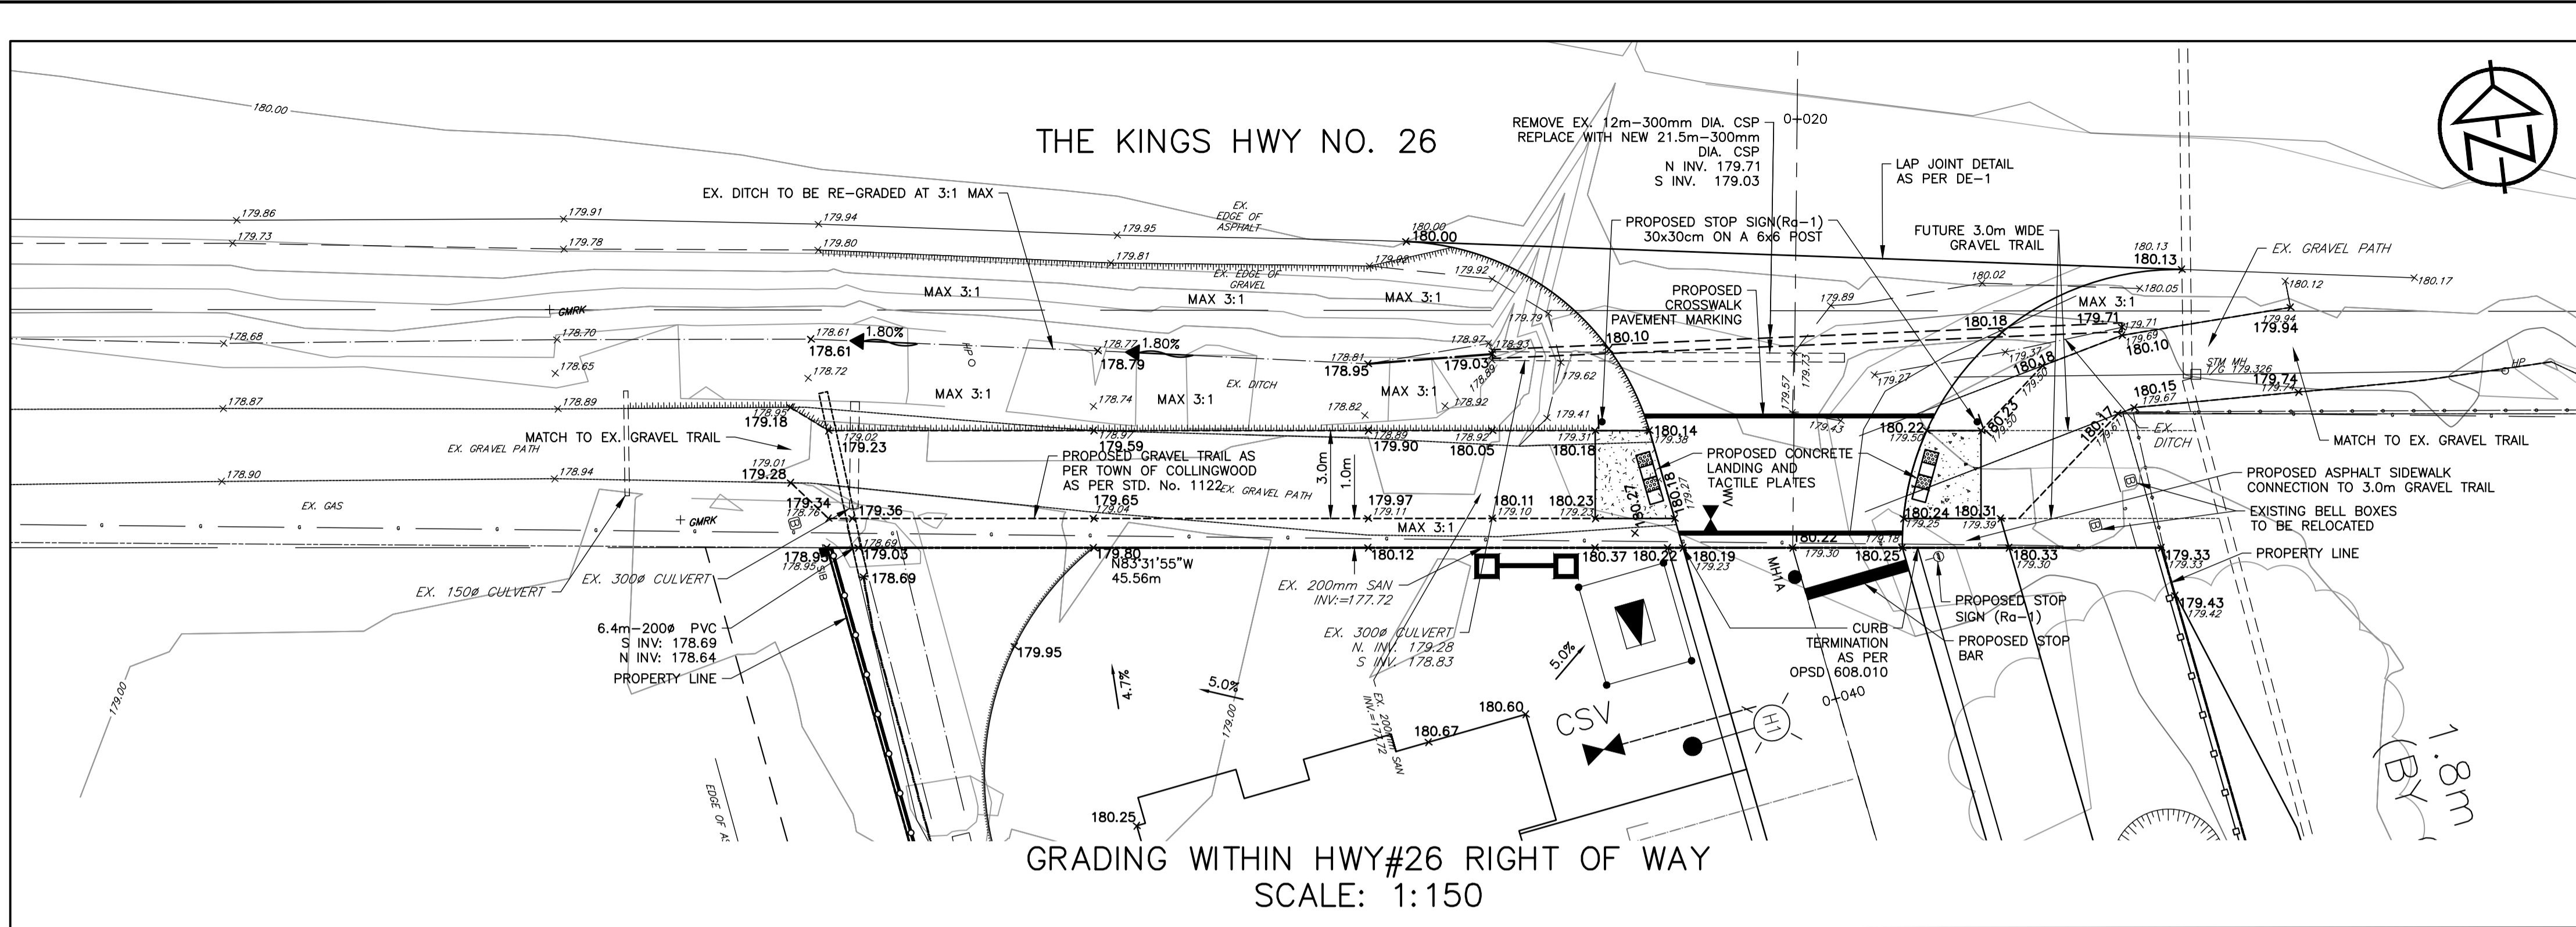

KEY PLAN

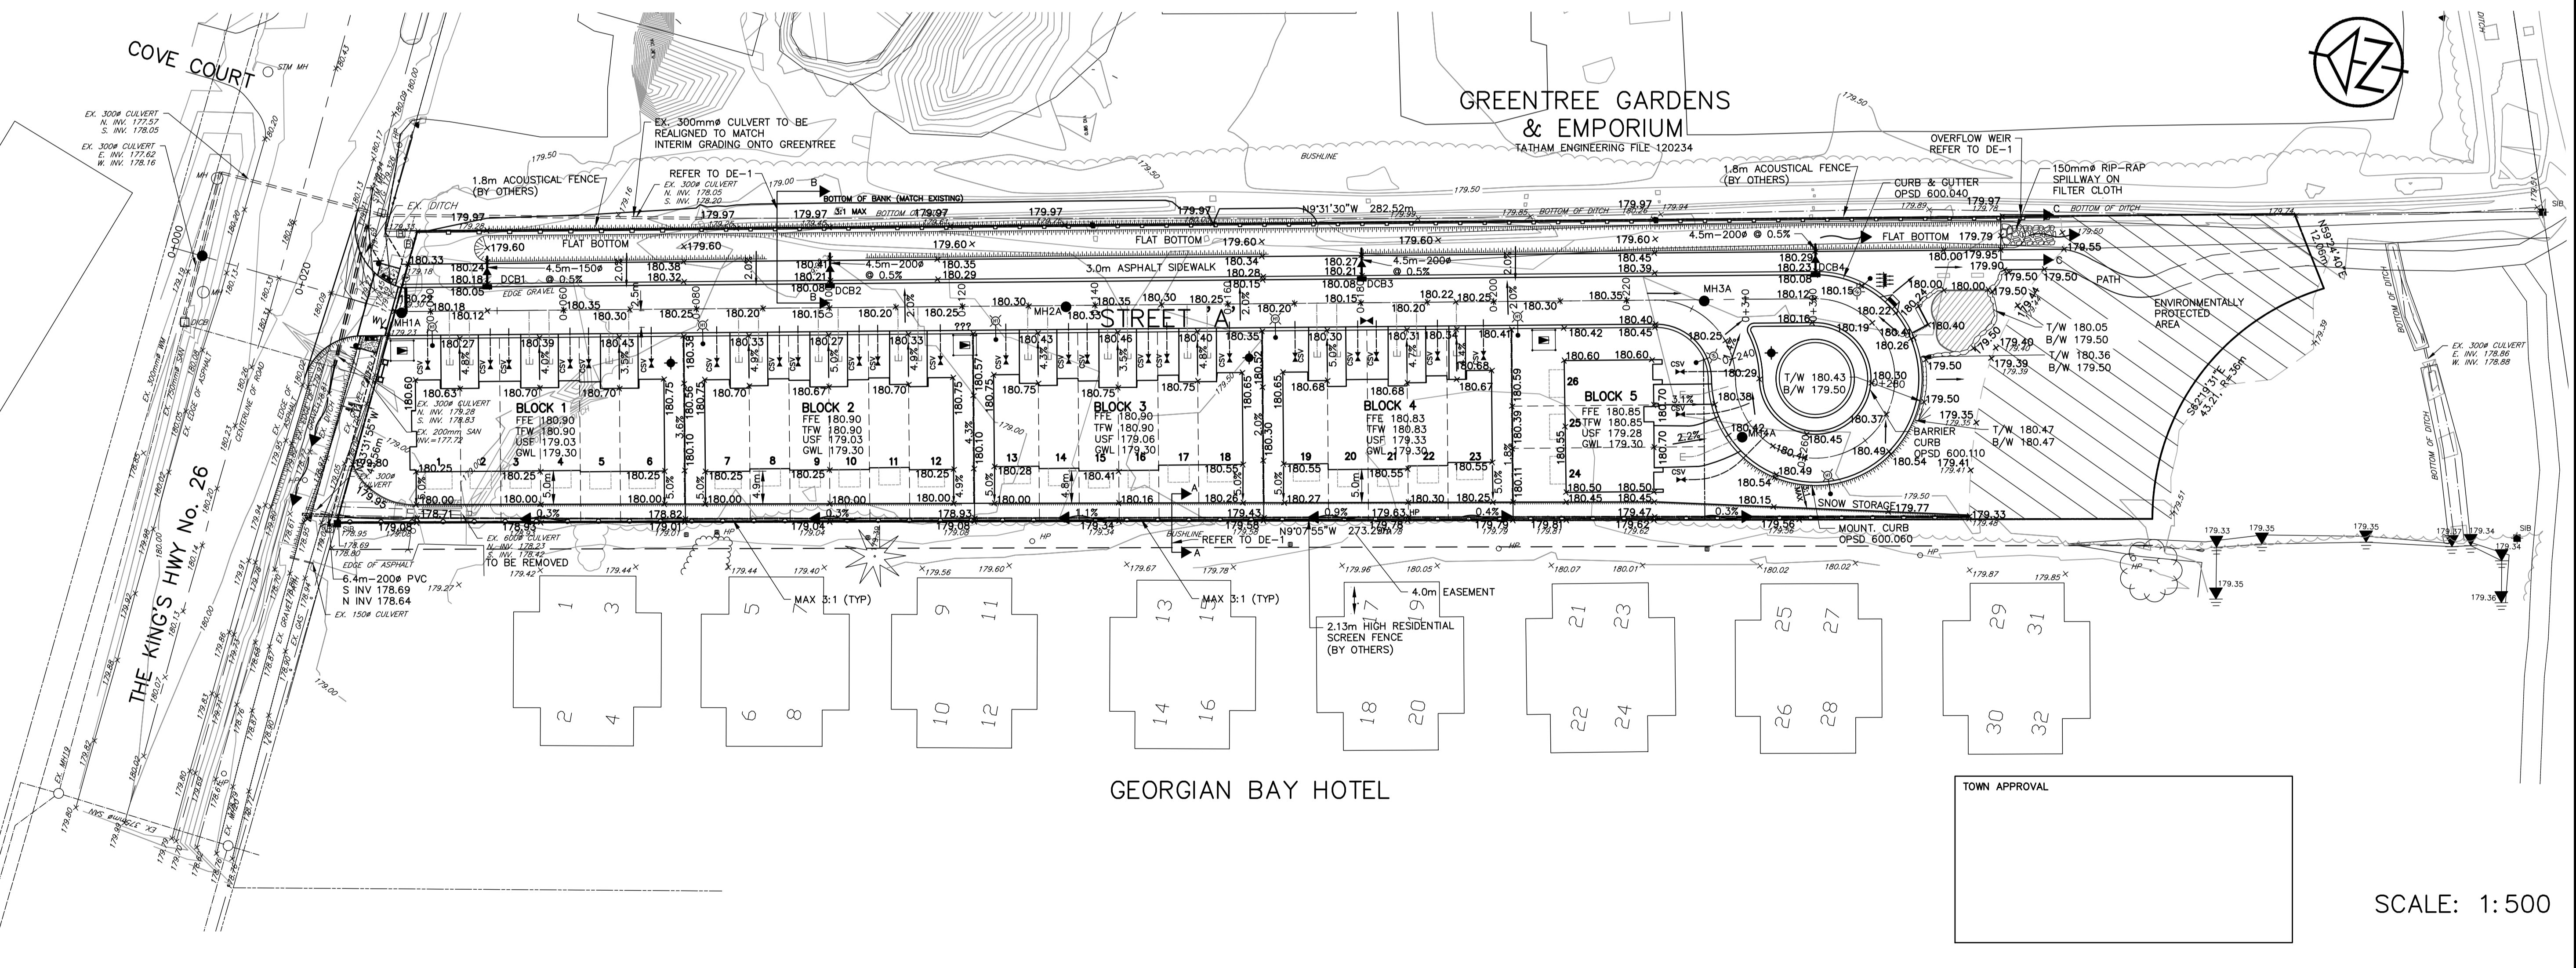

**DISCLAIMER AND COPYRIGHT**  
 CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
 TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
 ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 00119720311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.


**NOTES**  
 LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 56-170-6  
 TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE
1.	1ST SUBMISSION	03/22
2.	2ND SUBMISSION	12/22
3.	3RD SUBMISSION	07/23
4.	4TH SUBMISSION	12/23

**ENGINEER STAMP**  
 LICENSED PROFESSIONAL ENGINEER  
 2023.12.04  
 D. M. CASILLON  
 PROVINCE OF ONTARIO

**CRANBERRY MARSH ESTATES**  
 TOWN OF COLLINGWOOD  
 SITE GRADING PLAN

**TATHAM ENGINEERING**  
 DESIGN: KH FILE: 120181 DWG:  
 DRAWN: KH/SBU/AP DATE: OCT 2021 **SG-1**  
 CHECK: DC SCALE: AS NOTED

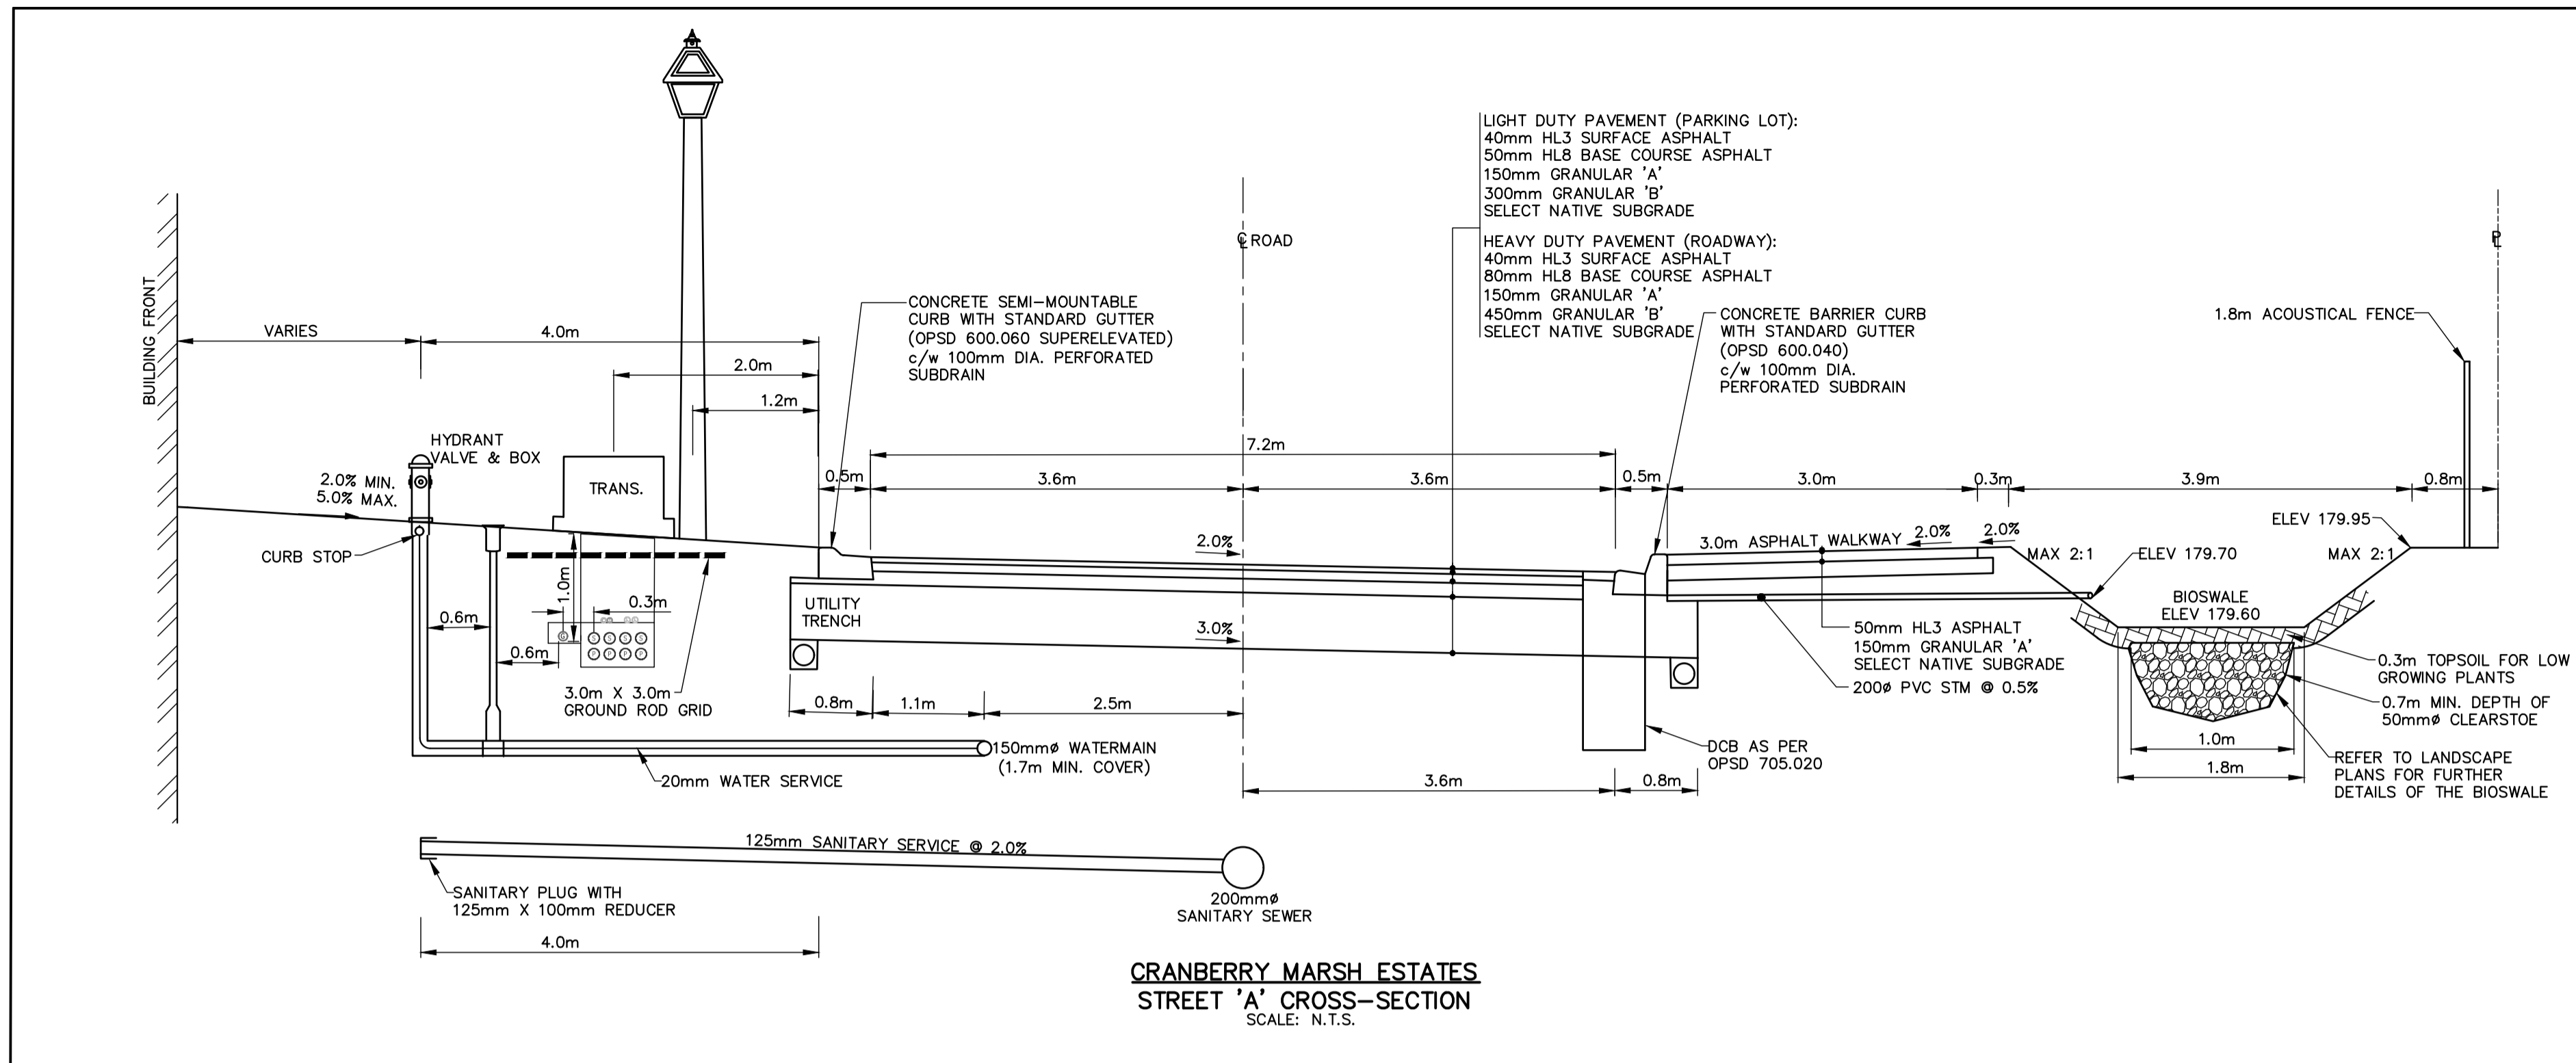

**GENERAL - CONSTRUCTION**

- A) ALL WORK TO BE CARRIED OUT IN ACCORDANCE WITH TOWN OF COLLINGWOOD STANDARDS, O.P.S.D. AND O.P.S.S. WHERE CONFLICT OCCURS, TOWN OF COLLINGWOOD STANDARD TO GOVERN.
- B) TRENCH BACKFILL TO OPSS 802.010 TO BE SELECT NATIVE MATERIAL OR IMPORTED SELECT SUBGRADE TO OPSS 1010. BACKFILL TO BE PLACED IN MAXIMUM 200 mm THICK LIFTS AND COMPACTED TO 95% OF THE MATERIAL'S STANDARD PROCTOR MAXIMUM DRY DENSITY (SPMDD).
- C) PIPE BEDDING TO BE GRANULAR 'A' PIPE COVER TO BE GRANULAR 'B' MAX. AGGREGATE SIZE 25mm FOR RIGID PIPE AND GRANULAR 'A' FOR FLEXIBLE PIPE. (MINIMUM BEDDING DEPTH 150 mm, MINIMUM COVER 300mm, COMPACTED TO A MINIMUM 95% SPMDD).
- D) CLEAR STONE WRAPPED IN FILTER FABRIC CAN BE SUBSTITUTED FOR EMBEDMENT MATERIAL IF APPROVED BY THE ENGINEER.
- E) ALL TOPSOIL AND EARTH EXCAVATION TO BE STOCK PILED OR REMOVED TO OPSS 180. MANAGEMENT AND DISPOSAL OF EXCESS MATERIAL TO AN APPROVED SITE AS DIRECTED BY ENGINEER.
- F) THE OWNER'S ENGINEER SHALL PROVIDE BENCH MARK ELEVATIONS AND HORIZONTAL ALIGNMENT REFERENCE FOR THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DETAILED LAYOUT OF THE WORK.
- G) ALL PROPERTY BARS TO BE PRESERVED AND REPLACED BY O.L.S. AT CONTRACTOR'S EXPENSE IF REMOVED DURING CONSTRUCTION.
- H) ALL MAINTENANCE HOLE AND CATCHBASIN FRAMES AND COVERS TO BE SET TO BASE COURSE HLB ASPHALT ELEVATION AND RAISED PRIOR TO PLACEMENT OF FINAL COURSE HLB ASPHALT.
- I) THE CONTRACTOR SHALL MAKE HIS OWN ARRANGEMENTS FOR THE SUPPLY OF TEMPORARY WATER AND POWER.
- J) DEWATERING TO BE CARRIED OUT IN ACCORDANCE WITH OPSS-517 AND 518 TO MAINTAIN ALL TRENCHES IN A DRY CONDITION.
- K) ALL ENGINE DRIVEN PUMPS TO BE ADEQUATELY SILENCED, SUITABLE FOR OPERATION IN A RESIDENTIAL DISTRICT.
- L) ALL DISTURBED AREAS TO BE REINSTATED TO PREVIOUS CONDITION OR BETTER.
- M) THE CONTRACTOR IS RESPONSIBLE FOR PRESERVATION OF ALL EXISTING FACILITIES AS WELL AS NOTIFYING ALL UTILITY COMPANIES PRIOR TO COMMENCING WORK AND CO-ORDINATE CONSTRUCTION ACCORDINGLY.
- N) ALL SIGNAGE TO BE LAWFULLY ERECTED AND MAINTAINED IN ACCORDANCE TO THE TOWN SIGN BY-LAW.
- O) CLEARING, GRUBBING AND REMOVAL OF SURFACE BOULDERS TO OPSS 201.
- P) GRADING TO OPSS 206.
- Q) COMPACTING TO OPSS 501.
- R) DUST SUPPRESSANT TO OPSS 506.
- S) TREE REMOVALS AND/OR TRANSPLANTS TO BE COMPLETED OUTSIDE OF MIGRATORY BIRDS NESTING SEASON FROM APRIL 1<sup>ST</sup> TO AUGUST 31<sup>ST</sup>. REMOVALS MAY TAKE PLACE DURING THIS RESTRICTED TIME ONLY IF THE REQUIREMENTS OF MIGRATING BIRDS CONVENTION ACT ARE MET AND NESTING ACTIVITY IS ROUTINELY MONITORED BY QUALIFIED INDIVIDUALS (I.E. WILDLIFE BIOLOGIST).

**SANITARY SEWERS**

- A) MAINTENANCE HOLES TO OPSS 701.010 AND 701.030.
- B) BENCHING TO OPSS - 701.021.
- C) STEPS TO OPSS - 405.010.
- D) FROST STRAPS SHALL BE INSTALLED ON ALL MAINTENANCE HOLE AS PER OPSS - 701.100
- E) FRAMES AND COVERS TO OPSS - 401.030 (WATER TIGHT COVER).
- F) PIPE SUPPORT AT MAINTENANCE HOLES AS PER OPSS 708.020.
- G) ALL MAINTENANCE HOLES, UNLESS EXPRESSLY IDENTIFIED ARE 1200 mm DIAMETER WITH WATER TIGHT INSERTS.
- H) GENERAL INSTALLATION AND TESTING OF SEWERS AND APPURTENANCES TO BE IN ACCORDANCE WITH O.P.S.S. 407, 408, 409 (CCTV), 410, 421 AND ALL SPECIFICATIONS REFERENCED WITHIN THESE SECTIONS.
- I) SERVICE CONNECTIONS TO BE 125 mm DIA., TERMINATED WHERE SPECIFIED ON THE DRAWING COMPLETE WITH PLUG AND MARKED WITH A 38mm X 89mm POST PAINTED GREEN FROM THE INVERT OF THE SERVICE TO 600 mm ABOVE GRADE.
- J) SERVICE CONNECTION TO OPSS 1006.020. GRANULAR A BEDDING AND EMBEDMENT.
- K) RIGID BOARD INSULATION (HI-40) REQUIRED FOR FROST PROTECTION OF SEWER WITH LESS THAN 1.2 m MINIMUM COVER. INSULATION TO BE MINIMUM 50 mm THICK AND HAVE A MINIMUM WIDTH OF 1.2m.

**WATER MAINS**

- A) THRUST BLOCKS TO OPSS-1103.010 AND 1103.020 WHERE SUITABLE SOILS ARE ENCOUNTERED.
- B) MINIMUM COVER ON WATER MAIN AND SERVICES TO BE 1.7 m.
- C) GATE VALVES, BENDS AND FITTINGS TO BE CONNECTED WITH ROMAC GRIP RING RESTRAINING CLAMP.
- D) CLEARANCE BETWEEN WATER MAINS AND SEWERS TO BE A MINIMUM OF 0.5m VERTICAL WHERE WATER MAIN IS BELOW SEWER OR 2.5m MINIMUM HORIZONTAL SEPARATION. WHERE WATER MAIN IS ABOVE SEWER, THE MINIMUM SEPARATION TO BE 150 mm (BEDDING MATERIAL).
- E) GENERAL INSTALLATION AND TESTING OF WATER MAIN AND APPURTENANCES TO BE IN ACCORDANCE WITH O.P.S.S. 701 AND ALL SPECIFICATIONS REFERENCED WITHIN THESE SECTIONS.
- F) ALL WORK ON TOWN PROPERTY AND ON TOWN OF COLLINGWOOD WATER DEPARTMENT (TCWD) WATER MAINS MUST BE UNDERTAKEN BY TCWD OR AN APPROVED CONTRACTOR WITH TCWD INSPECTION, ALL AT DEVELOPER'S COST.
- G) SERVICE CONNECTIONS TO OPSS-1104.010, 100 mm GRANULAR 'A' EMBEDMENT AND COVER OVER PIPE. TERMINATE WHERE SPECIFIED ON DRAWING C/W CURB STOP AND BOX, TESTING TAIL TO SURFACE ATTACHED TO A 38mm x 89mm MARKER POST PAINTED BLUE FROM THE INVERT OF THE SERVICE TO 600 mm ABOVE GRADE. I) ALL SERVICES ARE TO BE CONSTRUCTED IN ACCORDANCE WITH TOWN STANDARDS.
- H) WATER MAIN SERVICES - 20mm TYPE K COPPER, MAIN STOPS TO 201-3343, 3/4", BALL STYLE, AWWA THREAD BY COMPRESSION CAMBRIDGE BRASS. CURB STOPS TO 203-3343, 3/4" BALL STYLE WITH DRAIN, COMPRESSION JOINT CAMBRIDGE BRASS. SERVICE BOXES TO NUMBER 7, D-1 CLOW OR MUELLER WITH 24" BLACK RODS STRAIGHT OR OTHERWISE NOTED ON DRAWINGS.
- I) ALL WATER TESTING AND WATER MAIN CHLORINATION WILL BE CONDUCTED BY TCWD AT THE DEVELOPER'S COST. WATER MAINS ARE NOT TO BE CONNECTED TO THE EXISTING WATER MAINS UNTIL BACTERIOLOGICAL TESTING HAS BEEN SUCCESSFULLY COMPLETED. NEW WATER MAINS CAN NOT BE CONNECTED TO EXISTING MAINS UNTIL THEY HAVE PASSED BACTERIOLOGICAL TESTING AND AS SUCH A TEMPORARY BACKFLOW PREVENTOR WILL NEED TO BE INSTALLED BETWEEN THE LIVE TAP AND THE NEW SERVICE TO FACILITATE ADEQUATE PROTECTION OF THE EXISTING WATER MAIN. IT SHOULD BE NOTED THAT THIS TESTING TAKES APPROXIMATELY A WEEK TO COMPLETE AND MUST BE CONDUCTED BY TCWD. A WORK PLAN FOR THIS WORK MUST BE SUBMITTED TO TCWD FOR APPROVAL.
- J) AS A GENERAL PRINCIPLE EACH PROPERTY SHALL HAVE ONE SERVICE AND ONE METER.
- K) NO WATER VALVES ARE TO BE OPERATED WITHOUT TCWD APPROVAL.

**STORM SEWERS**






- A) CATCH BASINS AND DOUBLE CATCH BASINS TO OPSS 705.010 AND 705.020 C/W 600 mm SUMP. REAR LOT CATCH BASIN FRAME AND DITCH INLET CATCH BASINS TO OPSS 705.010 WITHOUT SUMP.
- B) CATCH BASINS AND DOUBLE CATCH BASINS FRAMES AND GRATES TO OPSS 400.020. REAR LOT CATCH BASIN FRAMES AND GRATES TO OPSS 400.120.
- C) CATCH BASIN LEADS - 250 mm DIA. SINGLE AND 300 mm DIA. DOUBLE. CATCH BASIN CONNECTIONS TO OPSS 708.010 AND OPSS 708.030.
- D) PIPE SUPPORT AT GRATES TO OPSS 708.020. CATCH BASINS AND INLET STRUCTURES FITTED WITH SEDIMENT TRAPS DURING CONSTRUCTION ACTIVITIES, AND CLEANED OUT AS REQUIRED PRIOR TO ASSUMPTION OF THE WORK.
- E) HEADWALLS TO BE INSTALLED IN ACCORDANCE WITH OPSS 804.030 (PIPE LESS THAN 900 mm DIA.) OR OPSS 804.040 (AS SPECIFIED), C/W GRATING IN ACCORDANCE WITH OPSS 804.050.

**ROAD AND PARKING**

- A) SUBGRADE AND ALL GRANULAR 'A' BOULEVARD MATERIAL TO BE COMPACTED TO A MINIMUM DRY DENSITY OF AT LEAST 95% SPMDD. SUBGRADE TO BE PROOF ROLLED AND CERTIFIED PRIOR TO PLACING GRANULAR 'B'.
- B) GRANULAR 'A' AND 'B' BASE TO BE COMPACTED TO 100% OF THE MATERIAL'S RESPECTIVE SPMDD.
- C) LIGHT DUTY PAVEMENT TWO LIFTS TOTAL 90mm (50mm HLB AND 40mm HL3), 150mm GRANULAR 'A', 300mm GRANULAR 'B', HEAVY DUTY PAVEMENT TWO LIFTS TOTAL 120mm (80mm HLB AND 40mm HL3), 150 mm GRANULAR 'A', 450mm GRANULAR 'B', ALL SUBDRAINS TO BE CONSTRUCTED IN ACCORDANCE WITH OPSS 405.
- D) CONCRETE SEMI-MOUNTABLE CURB WITH STANDARD GUTTER TO OPSS 600.060 INCLUDING SUPERELEVATED. CONCRETE BARRIER CURB WITH STANDARD GUTTER TO OPSS 600.040. CONCRETE BARRIER CURB TO OPSS 600.110
- E) SELECT SUBGRADE MATERIAL, OR IMPORTED GRANULAR MATERIAL APPROVED BY THE ENGINEER, COMPACTED TO 98% S.P.M.D.D. TO BE USED AS FILL IN ALL AREAS WHERE PROPOSED PIPE INVERTS ARE HIGHER THAN EXISTING GRADE OR AS INSTRUCTED BY THE ENGINEER.
- F) ALL GRANULARS AND ASPHALT MATERIALS AND PLACEMENT TO BE IN ACCORDANCE WITH OPSS 314 AND OPSS 310
- G) JOINTS WITH EXISTING ASPHALT TO BE SAW CUT STRAIGHT PRIOR TO PLACING NEW ASPHALT AND TACK COAT APPLIED TO EXISTING ASPHALT. ASPHALT JOINT WITH HIGHWAY No. 26 TO BE COMPLETE WITH LAP JOINT, SEE DETAIL THIS PAGE.
- H) REINSTATEMENT OF ALL DISTURBED BOULEVARDS TO INCLUDE REGRADING, MINIMUM 150mm TOPSOIL AND SOD TO OPSS.MUNI 802 AND 803.
- I) ALL FIRE ROAD SIGNAGE TO BE AS PER TOWN OF COLLINGWOOD BY-LAW 96-37.
- J) ENTRANCE AS PER OPSS 350.010, SIDEWALKS TO OPSS 310.050 AND 310.010.

**MATERIALS**

- A) SANITARY SEWER SDR-35 PVC, SANITARY SERVICES - SDR 28 PVC
- B) WATER MAIN - DUCTILE IRON CLASS 52, OR PRESSURE CLASS 350 CEMENT LINED. CONDUCTIVITY CONNECTORS TO BE USED ON ALL JOINTS.
- C) WATER SERVICE CONNECTIONS TO BE TYPE 'K' COPPER PIPE.
- D) VALVES - RESILIENT SEATED, RSGV, MECHANICAL JOINT, OPEN LEFT CLOW OR MUELLER WITH 5 SL-48 SLIDING VALVE BOX, TO AWWA C504.
- E) MECHANICAL JOINT DUCTILE FITTINGS - AWWA/ANSI C153/A21.53.
- F) RESTRAINER - ROMAC GRIPPER RING FOR PIPE SIZES UP TO 300 mm AND SIGMA ONE-LOCK FOR PIPE SIZES GREATER THAN 300 mm.
- G) LIVE TAP SADDLES - EPOXY COATED C/W STAINLESS STEEL BOLTS.
- H) LIVE TAP VALVE - RESILIENT SEATED RSGV, LIVE TAPE VALVE, OPEN LE.
- I) FILTER FABRIC - TERRAFIX 270R OR APPROVED EQUAL.
- J) PERFORATED SUBDRAINS - 100mm DIA. BIG 'O' WITH GEOTEXTILE FILTER SOCK OR APPROVED EQUAL UNLESS NOTED OTHERWISE.
- K) ALL SPECIFIED AGGREGATES TO OPSS 1010.
- L) INSULATION - STYROFOAM HI-40.
- M) ALL HYDRANTS SHALL BE CANADA VALVE, CENTURY NO. 1 OPEN LEFT WITH 2 CSA HOSE PORTS, ONE STORZ 4" PUMPER PORT, AND A BREAK AWAY TYPE 6" MJ BASE.

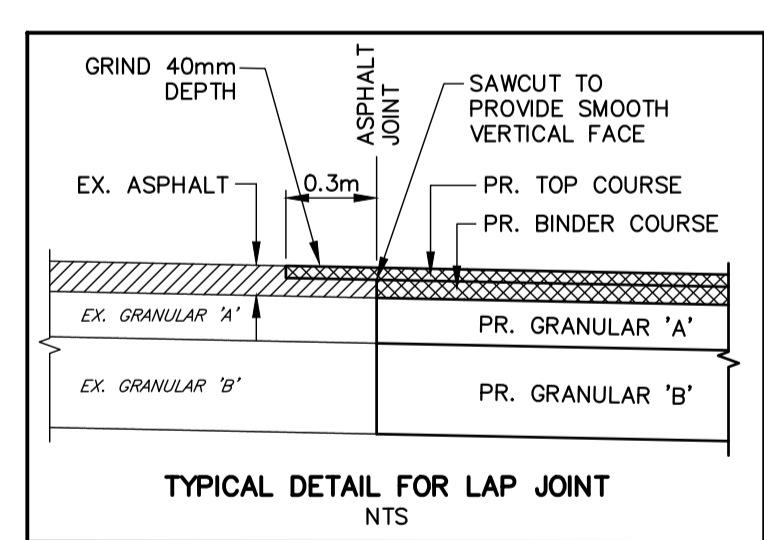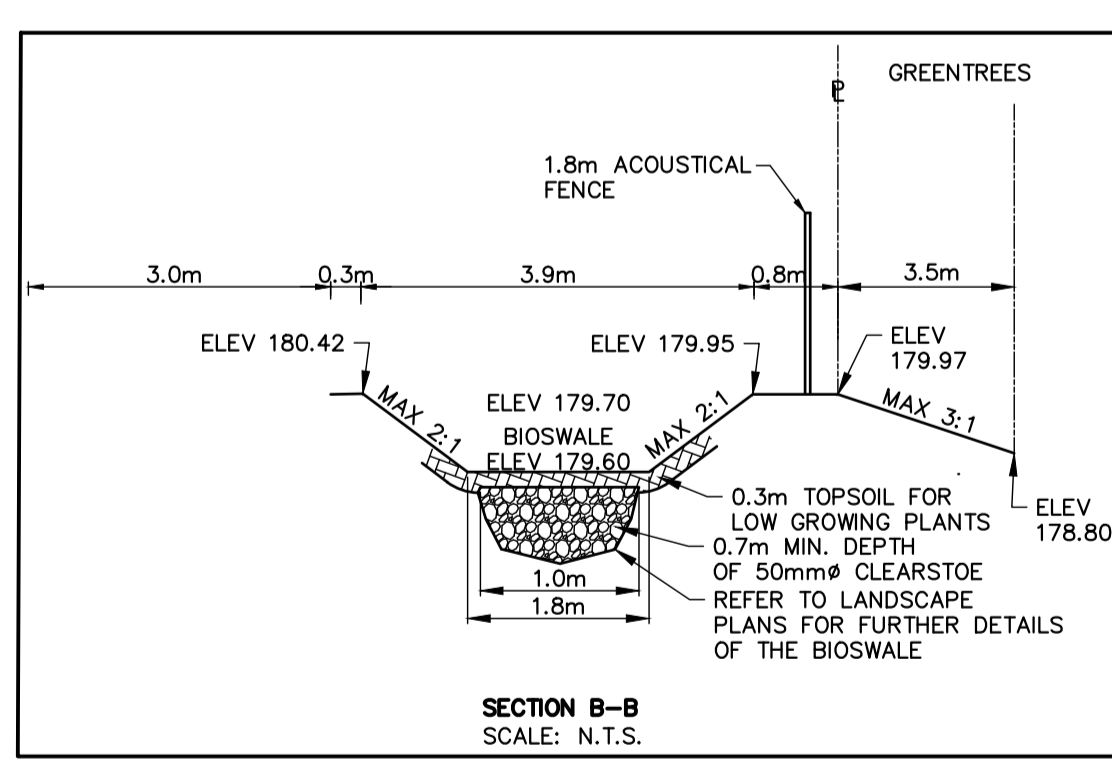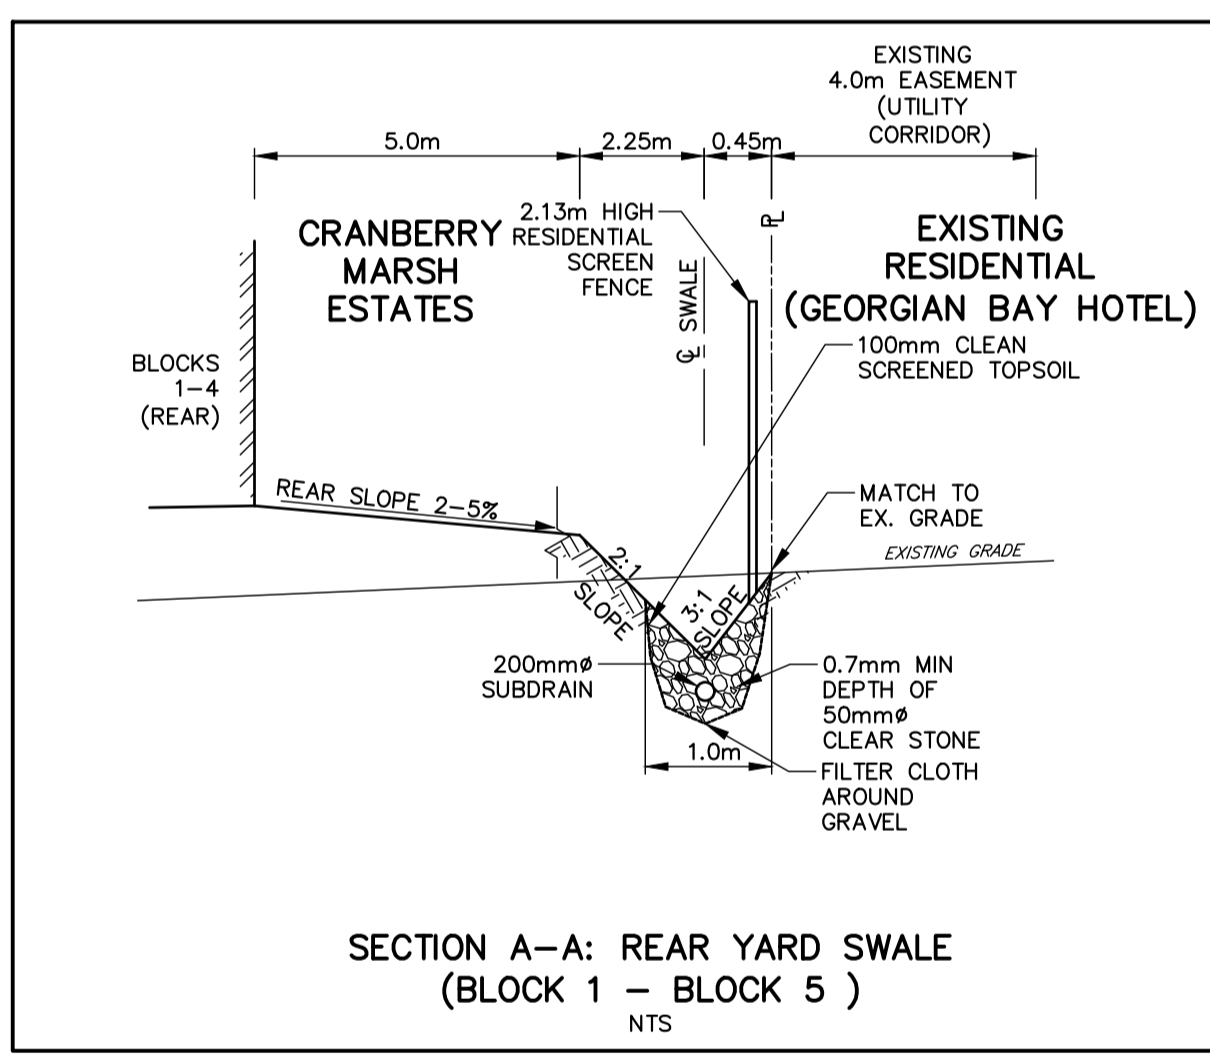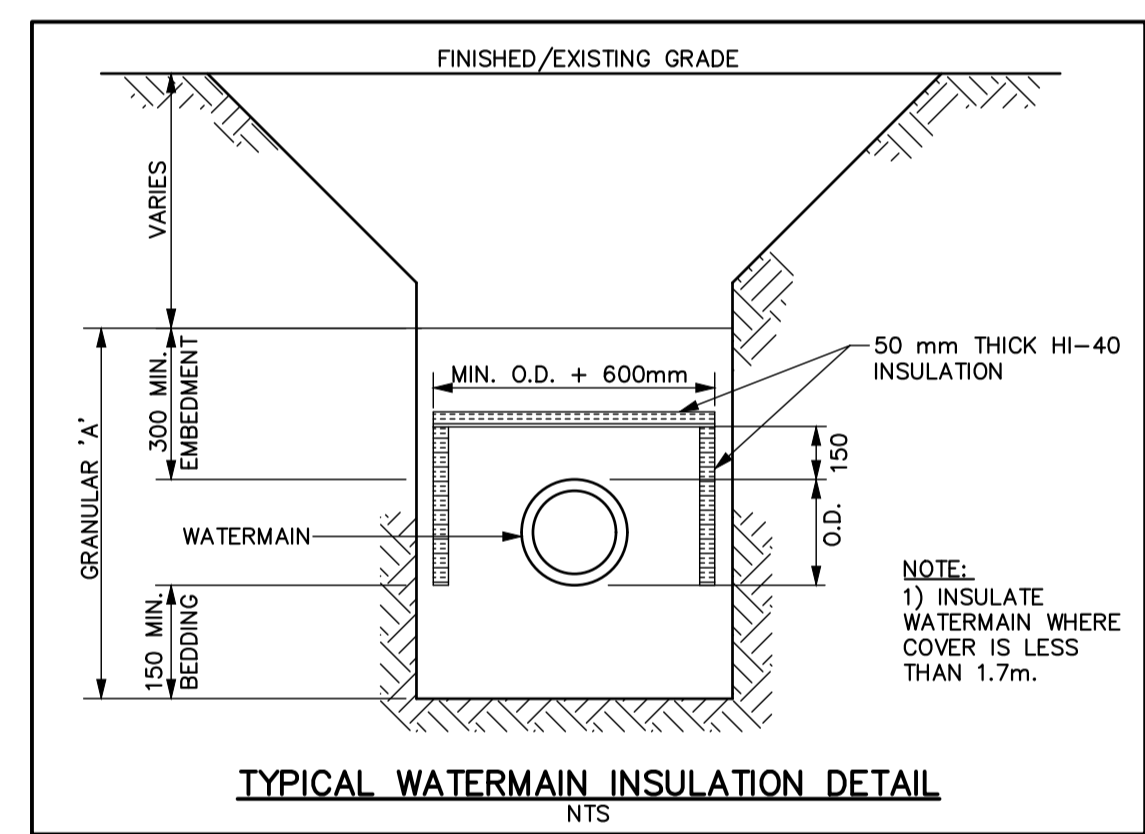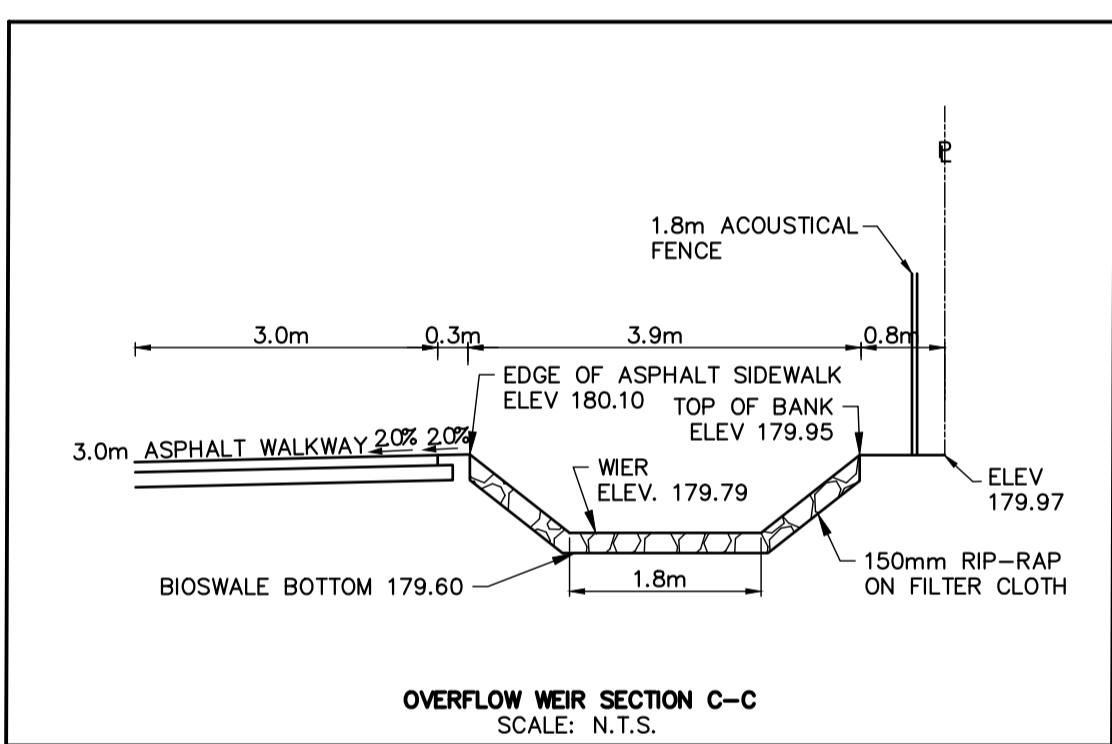

TOWN APPROVAL

**DISCLAIMER AND COPYRIGHT**  
CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.

**NOTES**  
LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6  
TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE	ENGINEER STAMP
1.	1ST SUBMISSION	03/22	
2.	2ND SUBMISSION	12/22	
3.	3RD SUBMISSION	07/23	
4.	4TH SUBMISSION	12/23	

**CRANBERRY MARSH ESTATES  
TOWN OF COLLINGWOOD**

**DETAILS & NOTES**

**TATHAM ENGINEERING**

DESIGN: KG/SBU	FILE: 120181	DWG:
DRAWN: KH/SBU	DATE: NOV 2021	<b>DE-1</b>
CHECK: DC	SCALE: 1:500	



# Appendix A: Pre-Development SWM Calculations

## Active coordinate

44° 30' 45" N, 80° 15' 45" W (44.512500,-80.262500)

Retrieved: Wed, 08 Dec 2021 16:31:58 GMT



### Location summary


These are the locations in the selection.

**IDF Curve:** 44° 30' 45" N, 80° 15' 45" W (44.512500,-80.262500)

### Results

An IDF curve was found.

**Coordinate: 44.512500, -80.262500**  
**IDF curve year: 2010**

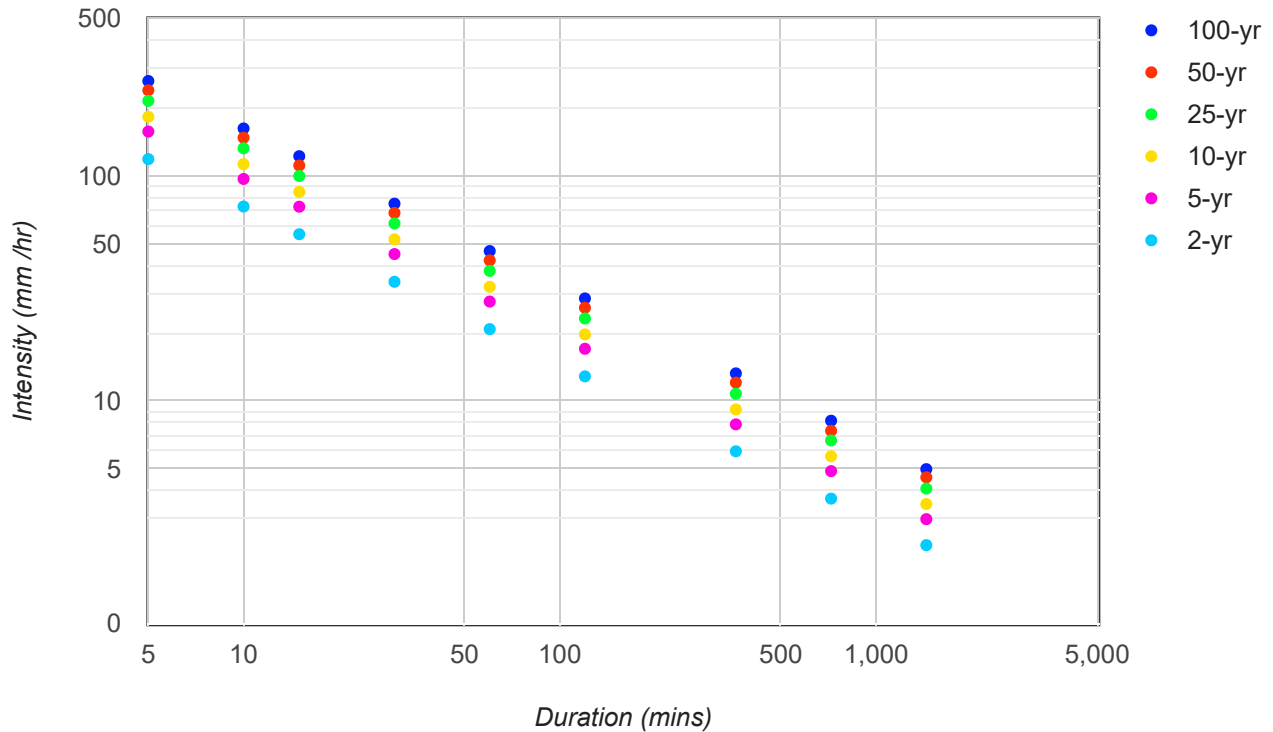

## Coefficient summary

IDF Curve: 44° 30' 45" N, 80° 15' 45" W (44.512500,-80.262500)

Retrieved: Wed, 08 Dec 2021 16:31:58 GMT

Data year: 2010

IDF curve year: 2010

Return period	2-yr	5-yr	10-yr	25-yr	50-yr	100-yr
A	20.9	27.7	32.2	37.9	42.2	46.4
B	-0.699	-0.699	-0.699	-0.699	-0.699	-0.699

## Statistics

### Rainfall intensity (mm hr<sup>-1</sup>)

Duration	5-min	10-min	15-min	30-min	1-hr	2-hr	6-hr	12-hr	24-hr
2-yr	118.7	73.1	55.1	33.9	20.9	12.9	6.0	3.7	2.3
5-yr	157.3	96.9	73.0	45.0	27.7	17.1	7.9	4.9	3.0
10-yr	182.9	112.7	84.9	52.3	32.2	19.8	9.2	5.7	3.5
25-yr	215.3	132.6	99.9	61.5	37.9	23.3	10.8	6.7	4.1
50-yr	239.7	147.7	111.2	68.5	42.2	26.0	12.1	7.4	4.6
100-yr	263.6	162.3	122.3	75.3	46.4	28.6	13.3	8.2	5.0

### Rainfall depth (mm)

Duration	5-min	10-min	15-min	30-min	1-hr	2-hr	6-hr	12-hr	24-hr
2-yr	9.9	12.2	13.8	17.0	20.9	25.7	35.8	44.2	54.4
5-yr	13.1	16.2	18.2	22.5	27.7	34.1	47.5	58.5	72.1
10-yr	15.2	18.8	21.2	26.1	32.2	39.7	55.2	68.0	83.8
25-yr	17.9	22.1	25.0	30.8	37.9	46.7	65.0	80.1	98.6
50-yr	20.0	24.6	27.8	34.3	42.2	52.0	72.4	89.2	109.8
100-yr	22.0	27.1	30.6	37.7	46.4	57.2	79.6	98.0	120.8


## Terms of Use







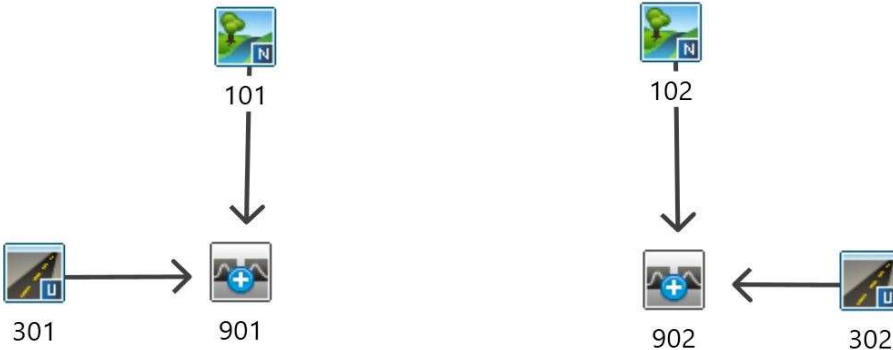

You agree to the [Terms of Use](#) of this site by reviewing, using, or interpreting these data.

[Ontario Ministry of Transportation](#) | [Terms and Conditions](#) | [About](#)

Last Modified: September 2016

**CRANBERRY MARSH ESTATES  
EXISTING CONDITIONS**



 1	Nashyd	 1	Route Pipe	 1	Duhyd
 1	Standhyd	 1	Route Channel	 1	Diverthyd
 1	Addhyd	 1	Route Reservoir		



<b>Project:</b>	Cranberry Marsh Estates
<b>File No.:</b>	120181
<b>Subject:</b>	Otthymo Flow Schematic
<b>Date:</b>	Dec-22

# Visual OTTHYMO Model Parameter Calculations (NasHYD)

## Project Details

Cranberry Marsh Estates	120181
-------------------------	--------

## Data Sources

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

## Prepared By

Kyle Gowanlock	Dec 2022
----------------	----------

## Pre-Development Condition

Watershed:	NVCA
Catchment ID:	101
Catchment Area (ha):	0.74
Impervious %:	

## Average Curve Number (CN), Runoff Coefficient (C) and Initial Abstraction (IA)

Soil Symbol	Pal												
Soil Series	Parkhill												
Hydrologic Soils Group	BC												
Soil Texture	Loam or Silt Loam												
Runoff Coefficient Type	2												
Area (ha)	0.74												
Percentage of Catchment	100%												
Land Cover Category	IA	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C
Impervious	2		100	0.95									
Gravel	3	0.09	89	0.27									
Woodland	10	0.65	67	0.25									
Pasture/Lawns	5		74	0.28									
Meadows	8		71	0.27									
Cultivated	7		78	0.35									
Waterbody	12		50	0.05									
Average CN	69.68												
Average C	0.25												
Average IA	9.15												

## Time to Peak Calculations

Max. Catchment Elev. (m):	179.75
Min. Catchment Elev. (m):	178.74
Catchment Length (m):	115
Catchment Slope (%):	0.88%
Method:	Airport Method
Time of Concentration (mins):	30.95

## Summary

Catchment CN:	69.7
Catchment C:	0.25
Catchment IA (mm):	9.15
Time of Concentration (hrs):	0.52
Catchment Time to Peak (hrs):	0.34
Catchment Time Step (mins):	4.13

# Visual OTTHYMO Model Parameter Calculations (NasHYD)

## Project Details

Cranberry Marsh Estates	120181
-------------------------	--------

## Data Sources

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

## Prepared By

Kyle Gowanlock	Dec 2022
----------------	----------

## Pre-Development Condition

Watershed:	NVCA
Catchment ID:	102
Catchment Area (ha):	0.55
Impervious %:	

## Average Curve Number (CN), Runoff Coefficient (C) and Initial Abstraction (IA)

Soil Symbol	Pal												
Soil Series	Parkhill												
Hydrologic Soils Group	BC												
Soil Texture	Loam or Silt Loam												
Runoff Coefficient Type	2												
Area (ha)	0.55												
Percentage of Catchment	100%												
Land Cover Category	IA	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C
Impervious	2		100	0.95									
Gravel	3		89	0.27									
Woodland	10	0.55	67	0.25									
Pasture/Lawns	5		74	0.28									
Meadows	8		71	0.27									
Cultivated	7		78	0.35									
Waterbody	12		50	0.05									
Average CN	67.00												
Average C	0.25												
Average IA	10.00												

## Time to Peak Calculations

Max. Catchment Elev. (m):	179.75
Min. Catchment Elev. (m):	179.37
Catchment Length (m):	128
Catchment Slope (%):	0.30%
Method:	Airport Method
Time of Concentration (mins):	46.80

## Summary

Catchment CN:	67.0
Catchment C:	0.25
Catchment IA (mm):	10.00
Time of Concentration (hrs):	0.78
Catchment Time to Peak (hrs):	0.52
Catchment Time Step (mins):	6.24

# Visual OTTHYMO Model Parameter Calculations (StandHYD)

## Project Details

Cranberry Marsh Estates	120181
-------------------------	--------

## Data Sources

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

## Prepared By

Kyle Gowanlock	Dec 2022
----------------	----------

## Pre-Development Condition

Watershed:	NVCA
Catchment ID:	301
Catchment Area (ha):	0.35
Impervious %:	53%
Pervious Area (ha):	0.16

## Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area

Soil Symbol	Pal								
Soil Series	Parkhill								
Hydrologic Soils Group	BC								
Soil Texture	Loam or Silt Loam								
Runoff Coefficient Type	2								
Area (ha)	0.16								
Percentage of Catchment	100%								
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.16	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN	74.00								
Average IA	5.00								

## Notes

CN and IA values have been calculated for the pervious area of the catchment only.
--

## Summary

Catchment CN:	74.0
Catchment IA (mm):	5.00

# Visual OTTHYMO Model Parameter Calculations (StandHYD)

## Project Details

Cranberry Marsh Estates	120181
-------------------------	--------

## Data Sources

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

## Prepared By

Kyle Gowanlock	Dec 2022
----------------	----------

## Pre-Development Condition

Watershed:	NVCA
Catchment ID:	302
Catchment Area (ha):	0.20
Impervious %:	43%
Pervious Area (ha):	0.11

## Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area

Soil Symbol	Pal								
Soil Series	Parkhill								
Hydrologic Soils Group	BC								
Soil Texture	Loam or Silt Loam								
Runoff Coefficient Type	2								
Area (ha)	0.11								
Percentage of Catchment	100%								
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.11	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN	74.00								
Average IA	5.00								

## Notes

CN and IA values have been calculated for the pervious area of the catchment only.
--

## Summary

Catchment CN:	74.0
Catchment IA (mm):	5.00



=====

V V I SSSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U A A A A L  
 V V I SS U U A A L  
 V V I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 O O T T H H Y Y M M O O  
 O O T T H H Y M M O O  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\7  
 9addd38-182f-4609-a785-dd4e1f038202\s

Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\7  
 9addd38-182f-4609-a785-dd4e1f038202\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (1) 25mm Design Storm \*\*  
 \*\*\*\*\*

-----  
 | READ STORM | Filename: C:\Users\KGowanlock\AppData\Local\Temp\  
 | |

| a6086671-b0bf-4fff-b250-a32c0506adc7\afe4e812  
 | Ptotal= 24.97 mm | Comments: 25MM BARRIE

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.10	0.00	1.20	2.81	2.30	8.44	3.40	1.76
0.20	1.29	1.30	3.22	2.40	6.21	3.50	1.65
0.30	1.36	1.40	3.77	2.50	4.91	3.60	1.55
0.40	1.44	1.50	4.55	2.60	4.06	3.70	1.46
0.50	1.53	1.60	5.77	2.70	3.47	3.80	1.39
0.60	1.63	1.70	7.86	2.80	3.03	3.90	1.32
0.70	1.75	1.80	12.27	2.90	2.70	4.00	1.26
0.80	1.89	1.90	26.17	3.00	2.43	4.10	1.20
0.90	2.06	2.00	72.58	3.10	2.22		
1.00	2.26	2.10	26.96	3.20	2.04		
1.10	2.50	2.20	13.05	3.30	1.89		

-----  
 | CALIB |  
 | NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
 | ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
 | U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.003 (i)  
 TIME TO PEAK (hrs)= 2.500  
 RUNOFF VOLUME (mm)= 1.975  
 TOTAL RAINFALL (mm)= 24.951  
 RUNOFF COEFFICIENT = 0.079

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0301) | Area (ha)= 0.35  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10

	IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)= 0.17	0.17
Dep. Storage	(mm)= 2.00	5.00
Average Slope	(%)= 2.00	8.00
Length	(m)= 48.30	13.00
Mannings n	= 0.013	0.250

Max.Eff.Inten.(mm/hr)= 72.58 35.68  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.52 (ii) 5.11 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.02 0.015 (iii)  
 TIME TO PEAK (hrs)= 2.00 2.08 2.08  
 RUNOFF VOLUME (mm)= 22.95 7.51 7.51  
 TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.30 0.30

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | ADD HYD ( 0901) |  
1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0101):	0.74	0.003	2.50	1.97
+ ID2= 2 ( 0301):	0.35	0.015	2.08	7.51
=====				
ID = 3 ( 0901):	1.09	0.016	2.08	3.75

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | CALIB |  
 | NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0  
 | ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00  
 -----  
 U.H. Tp(hrs)= 0.52

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.001 (i)  
 TIME TO PEAK (hrs)= 2.750  
 RUNOFF VOLUME (mm)= 1.594  
 TOTAL RAINFALL (mm)= 24.951  
 RUNOFF COEFFICIENT = 0.064

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0302) | Area (ha)= 0.20  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)= 72.58 22.39  
 over (min) 5.00 15.00  
 Storage Coeff. (min)= 1.29 (ii) 14.13 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 15.00  
 Unit Hyd. peak (cms)= 0.33 0.08

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.00 0.005 (iii)  
 TIME TO PEAK (hrs)= 2.00 2.17 2.17  
 RUNOFF VOLUME (mm)= 22.95 6.69 6.67  
 TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.27 0.27

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | ADD HYD ( 0902) |  
1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0102):	0.55	0.001	2.75	1.59
+ ID2= 2 ( 0302):	0.20	0.005	2.17	6.67
=====				
ID = 3 ( 0902):	0.75	0.005	2.25	2.95

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 =====  
 =====

V V I SSSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U AAAAA L  
 V V I SS U U A A L  
 W I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 0 0 T T H H Y Y MM MM 0 0  
 0 0 T T H H Y M M 0 0  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\1  
 9ba2dc5-18e5-4447-bf3f-766e142c5e44\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\1  
 9ba2dc5-18e5-4447-bf3f-766e142c5e44\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (2) 2 Year Design Storm - Chi \*\*  
 \*\*\*\*\*

CHICAGO STORM | IDF curve parameters: A= 365.657  
 | Ptotal= 31.69 mm | B= 0.000

-----  
 C= 0.699  
 used in: INTENSITY = A / (t + B)^C  
 Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	2.76	1.17	12.83	2.17	5.19	3.17	3.02
0.33	3.08	1.33	73.13	2.33	4.58	3.33	2.84
0.50	3.51	1.50	15.38	2.50	4.12	3.50	2.69
0.67	4.13	1.67	9.64	2.67	3.76	3.67	2.56
0.83	5.11	1.83	7.34	2.83	3.47	3.83	2.44
1.00	6.98	2.00	6.04	3.00	3.23	4.00	2.33

-----  
 CALIB  
 NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
 ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
 U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.004 (i)  
 TIME TO PEAK (hrs)= 1.917  
 RUNOFF VOLUME (mm)= 3.817  
 TOTAL RAINFALL (mm)= 31.693  
 RUNOFF COEFFICIENT = 0.120

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 CALIB  
 STANDHYD ( 0301) | Area (ha)= 0.35  
 ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)= 73.13 47.30  
 over (min) 5.00 5.00

Storage Coeff. (min)= 1.52 (ii) 4.72 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.33 0.22

PEAK FLOW (cms)= 0.00 0.02 0.023 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 29.69 11.54 11.55  
 TOTAL RAINFALL (mm)= 31.69 31.69 31.69  
 RUNOFF COEFFICIENT = 0.94 0.36 0.36

\*TOTALS\*

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0101): 0.74 0.004 1.92 3.82
+ ID2= 2 ( 0301): 0.35 0.023 1.33 11.55
=====
      ID = 3 ( 0901): 1.09 0.023 1.33 6.30
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
-----
      U.H. Tp(hrs)= 0.52
  
```

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.002 (i)  
 TIME TO PEAK (hrs)= 2.167  
 RUNOFF VOLUME (mm)= 3.203  
 TOTAL RAINFALL (mm)= 31.693  
 RUNOFF COEFFICIENT = 0.101

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) | Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----
  
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)= 73.13 28.26  
 over (min) 5.00 15.00  
 Storage Coeff. (min)= 1.28 (ii) 12.98 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 15.00  
 Unit Hyd. peak (cms)= 0.33 0.08

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.01 0.006 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.50 1.50  
 RUNOFF VOLUME (mm)= 29.69 10.43 10.41  
 TOTAL RAINFALL (mm)= 31.69 31.69 31.69  
 RUNOFF COEFFICIENT = 0.94 0.33 0.33

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0102): 0.55 0.002 2.17 3.20
+ ID2= 2 ( 0302): 0.20 0.006 1.50 10.41
=====
      ID = 3 ( 0902): 0.75 0.007 1.50 5.12
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

=====

V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U AAAAA L
V V I SS U U A A L
W I SSSSS UUUUU A A LLLLL

000 TTTTT TTTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc
Copyright 2007 - 2020 Smart City Water Inc
All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voindat

Output filename:
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\2
51b044f-7e22-4719-bb83-c2a62d1be9d7\s
Summary filename:
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\2
51b044f-7e22-4719-bb83-c2a62d1be9d7\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*
\*\* SIMULATION : (3) 5 Year Design Storm - Chi \*\*
\*\*\*\*\*

| CHICAGO STORM | IDF curve parameters: A= 484.627
| Ptotal= 42.00 mm | B= 0.000
C= 0.699
used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs
Storm time step = 10.00 min
Time to peak ratio = 0.35

Table with 8 columns: TIME (hrs), RAIN (mm/hr), TIME (hrs), RAIN (mm/hr), TIME (hrs), RAIN (mm/hr), TIME (hrs), RAIN (mm/hr). Rows show data points from 0.17 to 1.00 hours.

CALIB
NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.009 (i)
TIME TO PEAK (hrs)= 1.833
RUNOFF VOLUME (mm)= 7.527
TOTAL RAINFALL (mm)= 42.005
RUNOFF COEFFICIENT = 0.179

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB
STANDHYD ( 0301) | Area (ha)= 0.35
ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10

IMPERVIOUS PERVIOUS (i)
Surface Area (ha)= 0.17 0.17
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 8.00
Length (m)= 48.30 13.00
Mannings n = 0.013 0.250

Max.Eff.Inten.(mm/hr)= 96.92 79.45
over (min) 5.00 5.00
Storage Coeff. (min)= 1.36 (ii) 3.96 (ii)
Unit Hyd. Tpeak (min)= 5.00 5.00

```

Unit Hyd. peak (cms)=      0.33      0.24
                                     *TOTALS*
PEAK FLOW      (cms)=      0.00      0.04      0.040 (iii)
TIME TO PEAK   (hrs)=      1.33      1.33      1.33
RUNOFF VOLUME  (mm)=     40.00     18.54     18.56
TOTAL RAINFALL (mm)=     42.00     42.00     42.00
RUNOFF COEFFICIENT =      0.95      0.44      0.44

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----
ID1= 1 ( 0101):   AREA   QPEAK   TPEAK   R.V.
                  (ha)   (cms)   (hrs)   (mm)
+ ID2= 2 ( 0301): 0.74  0.009  1.83   7.53
                  0.35  0.040  1.33   18.56
=====
ID = 3 ( 0901):  1.09  0.041  1.33   11.07

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
-----
U.H. Tp(hrs)= 0.52

```

```

Unit Hyd Qpeak (cms)= 0.040
PEAK FLOW      (cms)= 0.005 (i)
TIME TO PEAK   (hrs)= 2.083
RUNOFF VOLUME  (mm)= 6.518
TOTAL RAINFALL (mm)= 42.005
RUNOFF COEFFICIENT = 0.155

```

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |

```

```

| STANDHYD ( 0302) | Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----

```

```

IMPERVIOUS PERVIOUS (i)
Surface Area (ha)= 0.09 0.11
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 2.00
Length (m)= 36.51 40.00
Mannings n = 0.013 0.250

```

```

Max.Eff.Inten.(mm/hr)= 96.92 62.74
over (min) 5.00 10.00
Storage Coeff. (min)= 1.15 (ii) 9.65 (ii)
Unit Hyd. Tpeak (min)= 5.00 10.00
Unit Hyd. peak (cms)= 0.34 0.11

```

```

*TOTALS*
PEAK FLOW (cms)= 0.00 0.01 0.013 (iii)
TIME TO PEAK (hrs)= 1.33 1.42 1.42
RUNOFF VOLUME (mm)= 40.00 17.02 17.01
TOTAL RAINFALL (mm)= 42.00 42.00 42.00
RUNOFF COEFFICIENT = 0.95 0.41 0.41

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----
ID1= 1 ( 0102):   AREA   QPEAK   TPEAK   R.V.
                  (ha)   (cms)   (hrs)   (mm)
+ ID2= 2 ( 0302): 0.55  0.005  2.08   6.52
                  0.20  0.013  1.42   17.01
=====
ID = 3 ( 0902):  0.75  0.014  1.42   9.32

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

=====
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L

```

```

V V I   SS   U U AAAAA L
V V I   SS   U U A A L
W V I   SSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM
O O T   T   H H Y Y MM MM O O
O O T   T   H H Y M M O O
000 T   T   H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\27d4faf6-7d84-4d75-805b-2d77e3965804\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\27d4faf6-7d84-4d75-805b-2d77e3965804\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (4) 10 Year Design Storm - Ch \*\*  
 \*\*\*\*\*

```

-----
| CHICAGO STORM | IDF curve parameters: A= 563.357
| Ptotal= 48.83 mm | B= 0.000
| | C= 0.699
-----
used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs
Storm time step = 10.00 min
Time to peak ratio = 0.35

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	4.25	1.17	19.77	2.17	8.00	3.17	4.65
0.33	4.74	1.33	112.66	2.33	7.06	3.33	4.38
0.50	5.41	1.50	23.70	2.50	6.35	3.50	4.15
0.67	6.37	1.67	14.86	2.67	5.79	3.67	3.94
0.83	7.88	1.83	11.31	2.83	5.34	3.83	3.75
1.00	10.75	2.00	9.31	3.00	4.97	4.00	3.59

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
| | U.H. Tp(hrs)= 0.39
-----

```

Unit Hyd Qpeak (cms) = 0.072

PEAK FLOW (cms) = 0.013 (i)  
 TIME TO PEAK (hrs) = 1.833  
 RUNOFF VOLUME (mm) = 10.479  
 TOTAL RAINFALL (mm) = 48.829  
 RUNOFF COEFFICIENT = 0.215

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0301) | Area (ha)= 0.35
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)	0.17	0.17
Dep. Storage (mm)	2.00	5.00
Average Slope (%)	2.00	8.00
Length (m)	48.30	13.00
Mannings n	0.013	0.250

Max. Eff. Inten. (mm/hr)	112.66	103.18
over (min)	5.00	5.00
Storage Coeff. (min)	1.28 (ii)	3.62 (ii)
Unit Hyd. Tpeak (min)	5.00	5.00
Unit Hyd. peak (cms)	0.33	0.25

			*TOTALS*
PEAK FLOW (cms)	0.00	0.05	0.052 (iii)
TIME TO PEAK (hrs)	1.33	1.33	1.33
RUNOFF VOLUME (mm)	46.83	23.59	23.60

TOTAL RAINFALL (mm)= 48.83 48.83 48.83  
 RUNOFF COEFFICIENT = 0.96 0.48 0.48

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| ADD HYD ( 0901)|
| 1 + 2 = 3 |
-----
|          AREA   QPEAK   TPEAK   R.V.
|          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0101):  0.74  0.013  1.83  10.48
+ ID2= 2 ( 0301):  0.35  0.052  1.33  23.60
-----
ID = 3 ( 0901):  1.09  0.055  1.33  14.69
-----
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| CALIB
| NASHYD ( 0102)| Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
|          U.H. Tp(hrs)= 0.52
-----
```

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.007 (i)  
 TIME TO PEAK (hrs)= 2.000  
 RUNOFF VOLUME (mm)= 9.195  
 TOTAL RAINFALL (mm)= 48.829  
 RUNOFF COEFFICIENT = 0.188

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB
| STANDHYD ( 0302)| Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----
|          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.09 0.11
```

Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 2.00  
 Length (m)= 36.51 40.00  
 Mannings n = 0.013 0.250

Max.Eff.Inten.(mm/hr)= 112.66 82.23  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.08 (ii) 8.71 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.34 0.12

```
-----
|          PEAK FLOW (cms)= 0.00 0.02
|          TIME TO PEAK (hrs)= 1.33 1.42
|          RUNOFF VOLUME (mm)= 46.83 21.82
|          TOTAL RAINFALL (mm)= 48.83 48.83
|          RUNOFF COEFFICIENT = 0.96 0.45
-----
|          *TOTALS*
|          0.017 (iii)
|          1.42
|          21.82
|          48.83
|          0.45
```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| ADD HYD ( 0902)|
| 1 + 2 = 3 |
-----
|          AREA   QPEAK   TPEAK   R.V.
|          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0102):  0.55  0.007  2.00  9.19
+ ID2= 2 ( 0302):  0.20  0.017  1.42  21.82
-----
ID = 3 ( 0902):  0.75  0.019  1.42  12.56
-----
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
VV I SSSSS UUUUU A A LLLLL
```



```

000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\4  
 a11d840-a946-4f4e-a480-cdda84162dce\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\4  
 a11d840-a946-4f4e-a480-cdda84162dce\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (5) 25 Year Design Storm - Ch \*\*  
 \*\*\*\*\*

```

-----
| CHICAGO STORM | IDF curve parameters: A= 663.082
| Ptotal= 57.47 mm | B= 0.000
| | C= 0.699
-----
used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs
Storm time step = 10.00 min
Time to peak ratio = 0.35

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	5.00	1.17	23.27	2.17	9.41	3.17	5.48

0.33	5.58	1.33	132.61	2.33	8.31	3.33	5.16
0.50	6.37	1.50	27.90	2.50	7.48	3.50	4.88
0.67	7.49	1.67	17.49	2.67	6.82	3.67	4.64
0.83	9.27	1.83	13.31	2.83	6.29	3.83	4.42
1.00	12.65	2.00	10.95	3.00	5.85	4.00	4.23

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
-----
U.H. Tp(hrs)= 0.39

```

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.019 (i)  
 TIME TO PEAK (hrs)= 1.750  
 RUNOFF VOLUME (mm)= 14.697  
 TOTAL RAINFALL (mm)= 57.473  
 RUNOFF COEFFICIENT = 0.256

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0301) | Area (ha)= 0.35
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)=	132.61	135.38
over (min)	5.00	5.00
Storage Coeff. (min)=	1.20 (ii)	3.30 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.33	0.27

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.07	0.070 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	55.47	30.33	30.35
TOTAL RAINFALL (mm)=	57.47	57.47	57.47
RUNOFF COEFFICIENT =	0.97	0.53	0.53

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901)|
| 1 + 2 = 3 |
-----
|          | AREA  QPEAK  TPEAK  R.V.
|          | (ha)  (cms)  (hrs)  (mm)
| ID1= 1 ( 0101):  0.74  0.019  1.75  14.70
| + ID2= 2 ( 0301):  0.35  0.070  1.33  30.35
|-----|
| ID = 3 ( 0901):  1.09  0.074  1.33  19.72
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB
| NASHYD ( 0102)| Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
|-----|
|          | U.H. Tp(hrs)= 0.52
  
```

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.010 (i)  
 TIME TO PEAK (hrs)= 2.000  
 RUNOFF VOLUME (mm)= 13.056  
 TOTAL RAINFALL (mm)= 57.473  
 RUNOFF COEFFICIENT = 0.227

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0302)| Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
|-----|
|          | IMPERVIOUS  PERVIOUS (i)
| Surface Area (ha)= 0.09 0.11
| Dep. Storage (mm)= 2.00 5.00
| Average Slope (%)= 2.00 2.00
  
```

```

Length (m)= 36.51 40.00
Mannings n = 0.013 0.250

Max.Eff.Inten.(mm/hr)= 132.61 108.92
over (min) 5.00 10.00
Storage Coeff. (min)= 1.01 (ii) 7.83 (ii)
Unit Hyd. Tpeak (min)= 5.00 10.00
Unit Hyd. peak (cms)= 0.34 0.13
  
```

```

PEAK FLOW (cms)= 0.00 0.02 *TOTALS*
TIME TO PEAK (hrs)= 1.33 1.42 0.024 (iii)
RUNOFF VOLUME (mm)= 55.47 28.27 28.28
TOTAL RAINFALL (mm)= 57.47 57.47 57.47
RUNOFF COEFFICIENT = 0.97 0.49 0.49
  
```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902)|
| 1 + 2 = 3 |
-----
|          | AREA  QPEAK  TPEAK  R.V.
|          | (ha)  (cms)  (hrs)  (mm)
| ID1= 1 ( 0102):  0.55  0.010  2.00  13.06
| + ID2= 2 ( 0302):  0.20  0.024  1.42  28.28
|-----|
| ID = 3 ( 0902):  0.75  0.027  1.42  17.11
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U AAAAA L
V V I SS U U A A L
VV I SSSS UUUU A A LLLL

000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y M M 0 0
  
```

000 T T H H Y M M 000  
 Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\5  
 a8cb67f-9e99-444e-bb98-988a078e4edf\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\5  
 a8cb67f-9e99-444e-bb98-988a078e4edf\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (6) 50 Year Design Storm - Ch \*\*  
 \*\*\*\*\*

-----  
 | CHICAGO STORM |  
Ptotal= 63.99 mm

IDF curve parameters: A= 738.312  
 B= 0.000  
 C= 0.699  
 used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	5.56	1.17	25.91	2.17	10.48	3.17	6.10
0.33	6.22	1.33	147.65	2.33	9.25	3.33	5.74
0.50	7.09	1.50	31.06	2.50	8.32	3.50	5.43
0.67	8.34	1.67	19.47	2.67	7.59	3.67	5.16

0.83	10.32	1.83	14.82	2.83	7.00	3.83	4.92
1.00	14.09	2.00	12.20	3.00	6.51	4.00	4.71

-----  
 | CALIB |  
 | NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
 | ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
 -----  
 U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.024 (i)  
 TIME TO PEAK (hrs)= 1.750  
 RUNOFF VOLUME (mm)= 18.185  
 TOTAL RAINFALL (mm)= 63.993  
 RUNOFF COEFFICIENT = 0.284

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0301) | Area (ha)= 0.35  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)=	147.65	160.94
over (min)	5.00	5.00
Storage Coeff. (min)=	1.15 (ii)	3.11 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.27

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.08	0.083 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	61.99	35.62	35.64
TOTAL RAINFALL (mm)=	63.99	63.99	63.99
RUNOFF COEFFICIENT =	0.97	0.56	0.56

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0101):  0.74  0.024  1.75  18.18
+ ID2= 2 ( 0301):  0.35  0.083  1.33  35.64
=====
      ID = 3 ( 0901):  1.09  0.089  1.33  23.79

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0102) |
| ID= 1 DT= 5.0 min |
-----
      Area (ha)= 0.55   Curve Number (CN)= 67.0
      Ia (mm)= 10.00   # of Linear Res.(N)= 3.00
      U.H. Tp(hrs)= 0.52

```

Unit Hyd Qpeak (cms)= 0.040

PEAK FLOW (cms)= 0.013 (i)  
 TIME TO PEAK (hrs)= 2.000  
 RUNOFF VOLUME (mm)= 16.274  
 TOTAL RAINFALL (mm)= 63.993  
 RUNOFF COEFFICIENT = 0.254

- (i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) |
| ID= 1 DT= 5.0 min |
-----
      Area (ha)= 0.20
      Total Imp(%)= 43.00   Dir. Conn.(%)= 0.10

```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250
Max.Eff.Inten.(mm/hr)=	147.65	130.25
over (min)	5.00	10.00

Storage Coeff. (min)=	0.97 (ii)	7.32 (ii)	
Unit Hyd. Tpeak (min)=	5.00	10.00	
Unit Hyd. peak (cms)=	0.34	0.13	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.03	0.029 (iii)
TIME TO PEAK (hrs)=	1.33	1.42	1.42
RUNOFF VOLUME (mm)=	61.99	33.36	33.37
TOTAL RAINFALL (mm)=	63.99	63.99	63.99
RUNOFF COEFFICIENT =	0.97	0.52	0.52

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0102):  0.55  0.013  2.00  16.27
+ ID2= 2 ( 0302):  0.20  0.029  1.42  33.37
=====
      ID = 3 ( 0902):  0.75  0.033  1.42  20.83

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

=====
V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
VV I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y M M 0 0
000 T T H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\8  
 6a49e86-b771-4b46-8895-06e0a67c74ad\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\8  
 6a49e86-b771-4b46-8895-06e0a67c74ad\s

DATE: 02-25-2022 TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (7) 100 Year Design Storm - C \*\*  
 \*\*\*\*\*

CHICAGO STORM | IDF curve parameters: A= 811.794  
 | Ptotal= 70.36 mm | B= 0.000  
 C= 0.699  
 used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.17	6.12	1.17	28.48	2.17	11.52	3.17	6.70
0.33	6.83	1.33	162.35	2.33	10.17	3.33	6.31
0.50	7.80	1.50	34.15	2.50	9.15	3.50	5.97
0.67	9.17	1.67	21.41	2.67	8.35	3.67	5.68
0.83	11.35	1.83	16.30	2.83	7.70	3.83	5.41
1.00	15.49	2.00	13.41	3.00	7.16	4.00	5.17

CALIB  
 NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
 |ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
 U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.029 (i)  
 TIME TO PEAK (hrs)= 1.750  
 RUNOFF VOLUME (mm)= 21.814  
 TOTAL RAINFALL (mm)= 70.362  
 RUNOFF COEFFICIENT = 0.310

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB  
 STANDHYD ( 0301) | Area (ha)= 0.35  
 |ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)=	162.35	186.77
over (min)	5.00	5.00
Storage Coeff. (min)=	1.10 (ii)	2.95 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.28

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.10 0.097 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 68.36 40.92 40.95  
 TOTAL RAINFALL (mm)= 70.36 70.36 70.36  
 RUNOFF COEFFICIENT = 0.97 0.58 0.58

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)  
 (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.  
 (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----

```

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0101):	0.74	0.029	1.75	21.81
+ ID2= 2 ( 0301):	0.35	0.097	1.33	40.95
=====				
ID = 3 ( 0901):	1.09	0.104	1.33	27.96

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0102) |
| ID= 1 DT= 5.0 min |
-----

```

	Area (ha)=	Curve Number (CN)=
	0.55	67.0
	Ia (mm)= 10.00	# of Linear Res.(N)= 3.00
	U.H. Tp(hrs)= 0.52	

Unit Hyd Qpeak (cms)= 0.040

PEAK FLOW (cms)= 0.016 (i)  
 TIME TO PEAK (hrs)= 2.000  
 RUNOFF VOLUME (mm)= 19.643  
 TOTAL RAINFALL (mm)= 70.362  
 RUNOFF COEFFICIENT = 0.279

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) |
| ID= 1 DT= 5.0 min |
-----

```

	Area (ha)=	Total Imp(%)=	Dir. Conn.(%)=
	0.20	43.00	0.10

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)= 162.35 151.92  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 0.93 (ii) 6.90 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.34 0.14

PEAK FLOW (cms)= 0.00 0.03 \*TOTALS\* 0.034 (iii)

TIME TO PEAK (hrs)=	1.33	1.42	1.42
RUNOFF VOLUME (mm)=	68.36	38.48	38.50
TOTAL RAINFALL (mm)=	70.36	70.36	70.36
RUNOFF COEFFICIENT =	0.97	0.55	0.55

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----

```

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0102):	0.55	0.016	2.00	19.64
+ ID2= 2 ( 0302):	0.20	0.034	1.42	38.50
=====				
ID = 3 ( 0902):	0.75	0.039	1.42	24.67

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

FINISH

```

=====
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
VV I SSSS UUUU A A LLLL

000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y Y M M 0 0
000 T T H H Y Y M M 000

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:

C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\3a3da94d-d18f-42c4-a909-5d1f49244ebc\s

Summary filename:

C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\3a3da94d-d18f-42c4-a909-5d1f49244ebc\s

DATE: 02-25-2022

TIME: 04:44:36

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (8) Timmins Design Storm \*\*  
 \*\*\*\*\*

READ STORM	Filename: C:\Users\KGowanlock\AppData\Local\Temp\
	a6086671-b0bf-4fff-b250-a32c0506adc7\3c4d485d
Ptotal=193.00 mm	Comments: TIMMINS

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.25	15.00	3.25	3.00	6.25	43.00	9.25	13.00
0.50	15.00	3.50	3.00	6.50	43.00	9.50	13.00
0.75	15.00	3.75	3.00	6.75	43.00	9.75	13.00
1.00	15.00	4.00	3.00	7.00	43.00	10.00	13.00
1.25	20.00	4.25	5.00	7.25	20.00	10.25	13.00
1.50	20.00	4.50	5.00	7.50	20.00	10.50	13.00
1.75	20.00	4.75	5.00	7.75	20.00	10.75	13.00
2.00	20.00	5.00	5.00	8.00	20.00	11.00	13.00
2.25	10.00	5.25	20.00	8.25	23.00	11.25	8.00
2.50	10.00	5.50	20.00	8.50	23.00	11.50	8.00
2.75	10.00	5.75	20.00	8.75	23.00	11.75	8.00
3.00	10.00	6.00	20.00	9.00	23.00	12.00	8.00

CALIB	Area (ha)= 0.74	Curve Number (CN)= 69.7
NASHYD ( 0101)	Ia (mm)= 9.15	# of Linear Res.(N)= 3.00
ID= 1 DT= 5.0 min	U.H. Tp(hrs)= 0.39	

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.058 (i)  
 TIME TO PEAK (hrs)= 7.083  
 RUNOFF VOLUME (mm)= 114.806  
 TOTAL RAINFALL (mm)= 193.000  
 RUNOFF COEFFICIENT = 0.595

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	Area (ha)= 0.35	
STANDHYD ( 0301)	Total Imp(%)= 50.00	Dir. Conn.(%)= 0.10
ID= 1 DT= 5.0 min		

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)=	43.00	78.74
over (min)	5.00	5.00
Storage Coeff. (min)=	1.88 (ii)	4.49 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.32	0.23

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.04	0.038 (iii)
TIME TO PEAK (hrs)=	6.50	7.00	7.00
RUNOFF VOLUME (mm)=	191.00	154.31	154.34
TOTAL RAINFALL (mm)=	193.00	193.00	193.00
RUNOFF COEFFICIENT =	0.99	0.80	0.80

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:

CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----

```

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0101):	0.74	0.058	7.08	114.81
+ ID2= 2 ( 0301):	0.35	0.038	7.00	154.34
=====				
ID = 3 ( 0901):	1.09	0.095	7.00	127.50

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0102) |
| ID= 1 DT= 5.0 min |
-----

```

	Area (ha)	Ia (mm)	U.H. Tp(hrs)	Curve Number (CN)	# of Linear Res.(N)
	0.55	10.00	0.52	67.0	3.00

Unit Hyd Qpeak (cms)= 0.040

PEAK FLOW (cms)= 0.037 (i)  
TIME TO PEAK (hrs)= 7.167  
RUNOFF VOLUME (mm)= 108.686  
TOTAL RAINFALL (mm)= 193.000  
RUNOFF COEFFICIENT = 0.563

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) |
| ID= 1 DT= 5.0 min |
-----

```

	Area (ha)	Total Imp(%)	Dir. Conn.(%)
	0.20	43.00	0.10

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)= 43.00 67.77  
over (min) 5.00 10.00

Storage Coeff. (min)=	1.59 (ii)	9.83 (ii)	
Unit Hyd. Tpeak (min)=	5.00	10.00	
Unit Hyd. peak (cms)=	0.33	0.11	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.02	0.021 (iii)
TIME TO PEAK (hrs)=	6.25	7.00	7.00
RUNOFF VOLUME (mm)=	191.00	149.98	150.00
TOTAL RAINFALL (mm)=	193.00	193.00	193.00
RUNOFF COEFFICIENT =	0.99	0.78	0.78

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----

```

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0102):	0.55	0.037	7.17	108.69
+ ID2= 2 ( 0302):	0.20	0.021	7.00	150.00
=====				
ID = 3 ( 0902):	0.75	0.057	7.00	119.70

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



=====

```
V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
V V I SSSSS UUUUU A A LLLLL
```

```
000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y M M O O
O O T T H H Y M M O O
000 T T H H Y M M 000
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\01eb1316-aea3-48a4-86c8-9b1e1d2e5ca3\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\01eb1316-aea3-48a4-86c8-9b1e1d2e5ca3\s

DATE: 02-25-2022 TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (1) 2 Year Design Storm - SCS \*\*  
 \*\*\*\*\*

-----  
 | READ STORM | Filename: C:\Users\KGowanlock\AppData\Local\Temp\  
 | |

-----  
 | Ptotal= 54.40 mm | 9c1599e0-5705-4571-9428-977ab3d9d9a7\7793d5b3  
 | Comments: 2yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	0.98	12.75	7.83	19.00	0.98
0.50	0.60	6.75	0.98	13.00	4.03	19.25	0.98
0.75	0.60	7.00	0.98	13.25	4.03	19.50	0.98
1.00	0.60	7.25	0.98	13.50	2.94	19.75	0.98
1.25	0.60	7.50	1.20	13.75	2.94	20.00	0.98
1.50	0.60	7.75	1.20	14.00	2.28	20.25	0.98
1.75	0.60	8.00	1.20	14.25	2.28	20.50	0.65
2.00	0.60	8.25	1.20	14.50	1.63	20.75	0.65
2.25	0.60	8.50	1.41	14.75	1.63	21.00	0.65
2.50	0.71	8.75	1.41	15.00	1.63	21.25	0.65
2.75	0.71	9.00	1.52	15.25	1.63	21.50	0.65
3.00	0.71	9.25	1.52	15.50	1.63	21.75	0.65
3.25	0.71	9.50	1.74	15.75	1.63	22.00	0.65
3.50	0.71	9.75	1.74	16.00	1.63	22.25	0.65
3.75	0.71	10.00	1.96	16.25	1.63	22.50	0.65
4.00	0.71	10.25	1.96	16.50	0.98	22.75	0.65
4.25	0.71	10.50	2.50	16.75	0.98	23.00	0.65
4.50	0.87	10.75	2.50	17.00	0.98	23.25	0.65
4.75	0.87	11.00	3.37	17.25	0.98	23.50	0.65
5.00	0.87	11.25	3.37	17.50	0.98	23.75	0.65
5.25	0.87	11.50	5.22	17.75	0.98	24.00	0.65
5.50	0.87	11.75	5.22	18.00	0.98	24.25	0.65
5.75	0.87	12.00	16.10	18.25	0.98		
6.00	0.87	12.25	66.59	18.50	0.98		
6.25	0.87	12.50	7.83	18.75	0.98		

-----  
 | CALIB |  
 | NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0  
 | ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00  
 |-----| U.H. Tp(hrs)= 0.52

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.008 (i)  
 TIME TO PEAK (hrs)= 12.750  
 RUNOFF VOLUME (mm)= 11.627  
 TOTAL RAINFALL (mm)= 54.400  
 RUNOFF COEFFICIENT = 0.214

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) | Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.09	0.11	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	2.00	
Length (m)=	36.51	40.00	
Mannings n =	0.013	0.250	
Max.Eff.Inten.(mm/hr)=	66.59	67.46	
over (min)	5.00	10.00	
Storage Coeff. (min)=	1.33 (ii)	9.60 (ii)	
Unit Hyd. Tpeak (min)=	5.00	10.00	
Unit Hyd. peak (cms)=	0.33	0.11	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.02	0.015 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	52.40	25.93	25.93
TOTAL RAINFALL (mm)=	54.40	54.40	54.40
RUNOFF COEFFICIENT =	0.96	0.48	0.48

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 |
-----

```

	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0102):	0.55	0.008	12.75	11.63
+ ID2= 2 ( 0302):	0.20	0.015	12.25	25.93
=====				
ID = 3 ( 0902):	0.75	0.019	12.33	15.44

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0301) | Area (ha)= 0.35
-----

```

```

| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.17	0.17	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	8.00	
Length (m)=	48.30	13.00	
Mannings n =	0.013	0.250	
Max.Eff.Inten.(mm/hr)=	66.59	82.50	
over (min)	5.00	5.00	
Storage Coeff. (min)=	1.58 (ii)	4.14 (ii)	
Unit Hyd. Tpeak (min)=	5.00	5.00	
Unit Hyd. peak (cms)=	0.33	0.24	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.04	0.040 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	52.40	27.89	27.91
TOTAL RAINFALL (mm)=	54.40	54.40	54.40
RUNOFF COEFFICIENT =	0.96	0.51	0.51

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
-----
U.H. Tp(hrs)= 0.39

```

Unit Hyd Qpeak (cms)=	0.072
PEAK FLOW (cms)=	0.015 (i)
TIME TO PEAK (hrs)=	12.500
RUNOFF VOLUME (mm)=	13.141
TOTAL RAINFALL (mm)=	54.400
RUNOFF COEFFICIENT =	0.242

- (i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901)|
| 1 + 2 = 3 |
-----

```

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0101):	0.74	0.015	12.50	13.14
+ ID2= 2 ( 0301):	0.35	0.040	12.25	27.91
=====				
ID = 3 ( 0901):	1.09	0.048	12.25	17.88

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
=====
-----

```

```

V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A L
V V I SS U U A A L
VV I SSSS UUUU A A LLLLL

```

```

OOO TTTT TTTT H H Y Y M M OOO TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
OOO T T H H Y M M OOO

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\789aeb1-77d2-4b2e-bbb9-2007b1070cfb\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\789aeb1-77d2-4b2e-bbb9-2007b1070cfb\s

DATE: 02-25-2022 TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

```

-----
*****
** SIMULATION : (2) 5 Year Design Storm - SCS **
*****

```

```

-----
| READ STORM | Filename: C:\Users\KGowanlock\AppData
|             |   ata\Local\Temp\
|             |   9c1599e0-5705-4571-9428-977ab3d9d9a7\f65a105d
| Ptotal= 72.10 mm | Comments: 5yr 24hr 15min SCS
-----

```

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.25	0.00	6.50	1.30	12.75	10.38	19.00	1.30
0.50	0.79	6.75	1.30	13.00	5.34	19.25	1.30
0.75	0.79	7.00	1.30	13.25	5.34	19.50	1.30
1.00	0.79	7.25	1.30	13.50	3.89	19.75	1.30
1.25	0.79	7.50	1.59	13.75	3.89	20.00	1.30
1.50	0.79	7.75	1.59	14.00	3.03	20.25	1.30
1.75	0.79	8.00	1.59	14.25	3.03	20.50	0.87
2.00	0.79	8.25	1.59	14.50	2.16	20.75	0.87
2.25	0.79	8.50	1.87	14.75	2.16	21.00	0.87
2.50	0.94	8.75	1.87	15.00	2.16	21.25	0.87
2.75	0.94	9.00	2.02	15.25	2.16	21.50	0.87
3.00	0.94	9.25	2.02	15.50	2.16	21.75	0.87
3.25	0.94	9.50	2.31	15.75	2.16	22.00	0.87
3.50	0.94	9.75	2.31	16.00	2.16	22.25	0.87
3.75	0.94	10.00	2.60	16.25	2.16	22.50	0.87
4.00	0.94	10.25	2.60	16.50	1.30	22.75	0.87
4.25	0.94	10.50	3.32	16.75	1.30	23.00	0.87
4.50	1.15	10.75	3.32	17.00	1.30	23.25	0.87
4.75	1.15	11.00	4.47	17.25	1.30	23.50	0.87
5.00	1.15	11.25	4.47	17.50	1.30	23.75	0.87
5.25	1.15	11.50	6.92	17.75	1.30	24.00	0.87
5.50	1.15	11.75	6.92	18.00	1.30	24.25	0.87
5.75	1.15	12.00	21.34	18.25	1.30		
6.00	1.15	12.25	88.25	18.50	1.30		
6.25	1.15	12.50	10.38	18.75	1.30		

```

-----
| CALIB |
| NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
|-----| U.H. Tp(hrs)= 0.52

```

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.014 (i)  
 TIME TO PEAK (hrs)= 12.667  
 RUNOFF VOLUME (mm)= 20.597  
 TOTAL RAINFALL (mm)= 72.100  
 RUNOFF COEFFICIENT = 0.286

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) | Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----
                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.09      0.11
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     2.00
Length (m)= 36.51          40.00
Mannings n = 0.013        0.250

Max.Eff.Inten.(mm/hr)= 88.25    103.13
over (min) 5.00          10.00
Storage Coeff. (min)= 1.19 (ii) 8.16 (ii)
Unit Hyd. Tpeak (min)= 5.00     10.00
Unit Hyd. peak (cms)= 0.33      0.13

                *TOTALS*
PEAK FLOW (cms)= 0.00      0.02      0.025 (iii)
TIME TO PEAK (hrs)= 12.25   12.25   12.25
RUNOFF VOLUME (mm)= 70.10   39.90   39.90
TOTAL RAINFALL (mm)= 72.10   72.10   72.10
RUNOFF COEFFICIENT = 0.97    0.55    0.55
  
```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
  
```

```

-----
                (ha) (cms) (hrs) (mm)
ID1= 1 ( 0102): 0.55 0.014 12.67 20.60
+ ID2= 2 ( 0302): 0.20 0.025 12.25 39.90
=====
ID = 3 ( 0902): 0.75 0.032 12.33 25.75
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0301) | Area (ha)= 0.35
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10
  
```

```

                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.17      0.17
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     8.00
Length (m)= 48.30          13.00
Mannings n = 0.013        0.250

Max.Eff.Inten.(mm/hr)= 88.25    124.37
over (min) 5.00          5.00
Storage Coeff. (min)= 1.41 (ii) 3.58 (ii)
Unit Hyd. Tpeak (min)= 5.00     5.00
Unit Hyd. peak (cms)= 0.33      0.26
  
```

```

                *TOTALS*
PEAK FLOW (cms)= 0.00      0.06      0.061 (iii)
TIME TO PEAK (hrs)= 12.25   12.25   12.25
RUNOFF VOLUME (mm)= 70.10   42.39   42.41
TOTAL RAINFALL (mm)= 72.10   72.10   72.10
RUNOFF COEFFICIENT = 0.97    0.59    0.59
  
```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
                U.H. Tp(hrs)= 0.39
  
```

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.026 (i)  
 TIME TO PEAK (hrs)= 12.500  
 RUNOFF VOLUME (mm)= 22.839  
 TOTAL RAINFALL (mm)= 72.100  
 RUNOFF COEFFICIENT = 0.317

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901)|
| 1 + 2 = 3 |
-----
ID1= 1 ( 0101):   AREA   QPEAK   TPEAK   R.V.
                   (ha)   (cms)   (hrs)   (mm)
+ ID2= 2 ( 0301):   0.74   0.026   12.50   22.84
=====
ID = 3 ( 0901):   1.09   0.076   12.25   29.12
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
VV I SSSSS UUUUU A A LLLLL
  
```

```

000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000
  
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\3  
 a0ce9c2-c0a9-47c9-b4bd-09c4327b5106\s  
 Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\3

a0ce9c2-c0a9-47c9-b4bd-09c4327b5106\s

DATE: 02-25-2022

TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

```

-----
*****
** SIMULATION : (3) 10 Year Design Storm - SC **
*****
  
```

```

-----
| READ STORM | Filename: C:\Users\KGowanlock\AppData
|            |   ata\Local\Temp\
|            |   9c1599e0-5705-4571-9428-977ab3d9d9a7\965a2d52
| Ptotal= 83.81 mm | Comments: 10yr 24hr 15min SCS
-----
  
```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.51	12.75	12.07	19.00	1.51
0.50	0.92	6.75	1.51	13.00	6.20	19.25	1.51
0.75	0.92	7.00	1.51	13.25	6.20	19.50	1.51
1.00	0.92	7.25	1.51	13.50	4.53	19.75	1.51
1.25	0.92	7.50	1.84	13.75	4.53	20.00	1.51
1.50	0.92	7.75	1.84	14.00	3.52	20.25	1.51
1.75	0.92	8.00	1.84	14.25	3.52	20.50	1.01
2.00	0.92	8.25	1.84	14.50	2.51	20.75	1.01
2.25	0.92	8.50	2.18	14.75	2.51	21.00	1.01
2.50	1.09	8.75	2.18	15.00	2.51	21.25	1.01
2.75	1.09	9.00	2.35	15.25	2.51	21.50	1.01
3.00	1.09	9.25	2.35	15.50	2.51	21.75	1.01
3.25	1.09	9.50	2.68	15.75	2.51	22.00	1.01
3.50	1.09	9.75	2.68	16.00	2.51	22.25	1.01
3.75	1.09	10.00	3.02	16.25	2.51	22.50	1.01
4.00	1.09	10.25	3.02	16.50	1.51	22.75	1.01
4.25	1.09	10.50	3.86	16.75	1.51	23.00	1.01
4.50	1.34	10.75	3.86	17.00	1.51	23.25	1.01
4.75	1.34	11.00	5.20	17.25	1.51	23.50	1.01
5.00	1.34	11.25	5.20	17.50	1.51	23.75	1.01
5.25	1.34	11.50	8.05	17.75	1.51	24.00	1.01
5.50	1.34	11.75	8.05	18.00	1.51	24.25	1.01
5.75	1.34	12.00	24.81	18.25	1.51		

6.00	1.34	12.25	102.58	18.50	1.51
6.25	1.34	12.50	12.07	18.75	1.51

```

-----
| CALIB |
| NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00
-----
U.H. Tp(hrs)= 0.52

```

```

Unit Hyd Qpeak (cms)= 0.040

PEAK FLOW (cms)= 0.019 (i)
TIME TO PEAK (hrs)= 12.667
RUNOFF VOLUME (mm)= 27.385
TOTAL RAINFALL (mm)= 83.810
RUNOFF COEFFICIENT = 0.327

```

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0302) | Area (ha)= 0.20
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.09	0.11	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	2.00	
Length (m)=	36.51	40.00	
Mannings n =	0.013	0.250	
Max.Eff.Inten.(mm/hr)=	102.58	127.81	
over (min)	5.00	10.00	
Storage Coeff. (min)=	1.12 (ii)	7.52 (ii)	
Unit Hyd. Tpeak (min)=	5.00	10.00	
Unit Hyd. peak (cms)=	0.34	0.13	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.03	0.032 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	81.81	49.70	49.71
TOTAL RAINFALL (mm)=	83.81	83.81	83.81
RUNOFF COEFFICIENT =	0.98	0.59	0.59

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0902) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
-----
ID1= 1 ( 0102): 0.55 0.019 12.67 27.39
+ ID2= 2 ( 0302): 0.20 0.032 12.25 49.71
-----
ID = 3 ( 0902): 0.75 0.042 12.33 33.34

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0301) | Area (ha)= 0.35
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10
-----

```

	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.17	0.17	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	8.00	
Length (m)=	48.30	13.00	
Mannings n =	0.013	0.250	
Max.Eff.Inten.(mm/hr)=	102.58	153.07	
over (min)	5.00	5.00	
Storage Coeff. (min)=	1.33 (ii)	3.33 (ii)	
Unit Hyd. Tpeak (min)=	5.00	5.00	
Unit Hyd. peak (cms)=	0.33	0.26	
			*TOTALS*
PEAK FLOW (cms)=	0.00	0.07	0.075 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	81.81	52.48	52.50
TOTAL RAINFALL (mm)=	83.81	83.81	83.81
RUNOFF COEFFICIENT =	0.98	0.63	0.63

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL

THAN THE STORAGE COEFFICIENT.  
 (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
-----
| U.H. Tp(hrs)= 0.39
  
```

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)= 0.035 (i)  
 TIME TO PEAK (hrs)= 12.500  
 RUNOFF VOLUME (mm)= 30.095  
 TOTAL RAINFALL (mm)= 83.810  
 RUNOFF COEFFICIENT = 0.359

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0101): 0.74 0.035 12.50 30.10
+ ID2= 2 ( 0301): 0.35 0.075 12.25 52.50
=====
ID = 3 ( 0901): 1.09 0.096 12.25 37.29
  
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

=====
V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
V V I SSSSS UUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000
  
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\4d7ddd6-3d51-4ca0-97ae-ba5cfb535653\s

Summary filename:  
 C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\4d7ddd6-3d51-4ca0-97ae-ba5cfb535653\s

DATE: 02-25-2022

TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

```

-----
*****
** SIMULATION : (4) 25 Year Design Storm - SC **
*****
  
```

```

-----
| READ STORM | Filename: C:\Users\KGowanlock\AppData
| | Local\Temp\
| | 9c1599e0-5705-4571-9428-977ab3d9d9a7\7c77deb8
| Ptotal= 98.65 mm | Comments: 25yr 24hr 15min SCS
-----
  
```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.78	12.75	14.21	19.00	1.78
0.50	1.09	6.75	1.78	13.00	7.30	19.25	1.78
0.75	1.09	7.00	1.78	13.25	7.30	19.50	1.78
1.00	1.09	7.25	1.78	13.50	5.33	19.75	1.78
1.25	1.09	7.50	2.17	13.75	5.33	20.00	1.78
1.50	1.09	7.75	2.17	14.00	4.14	20.25	1.78
1.75	1.09	8.00	2.17	14.25	4.14	20.50	1.18
2.00	1.09	8.25	2.17	14.50	2.96	20.75	1.18
2.25	1.09	8.50	2.56	14.75	2.96	21.00	1.18
2.50	1.28	8.75	2.56	15.00	2.96	21.25	1.18
2.75	1.28	9.00	2.76	15.25	2.96	21.50	1.18
3.00	1.28	9.25	2.76	15.50	2.96	21.75	1.18

3.25	1.28	9.50	3.16	15.75	2.96	22.00	1.18
3.50	1.28	9.75	3.16	16.00	2.96	22.25	1.18
3.75	1.28	10.00	3.55	16.25	2.96	22.50	1.18
4.00	1.28	10.25	3.55	16.50	1.78	22.75	1.18
4.25	1.28	10.50	4.54	16.75	1.78	23.00	1.18
4.50	1.58	10.75	4.54	17.00	1.78	23.25	1.18
4.75	1.58	11.00	6.12	17.25	1.78	23.50	1.18
5.00	1.58	11.25	6.12	17.50	1.78	23.75	1.18
5.25	1.58	11.50	9.47	17.75	1.78	24.00	1.18
5.50	1.58	11.75	9.47	18.00	1.78	24.25	1.18
5.75	1.58	12.00	29.20	18.25	1.78		
6.00	1.58	12.25	120.75	18.50	1.78		
6.25	1.58	12.50	14.21	18.75	1.78		

-----  
 | CALIB |  
 | NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0  
 | ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00  
 -----  
 U.H. Tp(hrs)= 0.52

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.026 (i)  
 TIME TO PEAK (hrs)= 12.667  
 RUNOFF VOLUME (mm)= 36.762  
 TOTAL RAINFALL (mm)= 98.650  
 RUNOFF COEFFICIENT = 0.373

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0302) | Area (ha)= 0.20  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.11
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	2.00
Length (m)=	36.51	40.00
Mannings n =	0.013	0.250
Max.Eff.Inten.(mm/hr)=	120.75	159.82
over (min)	5.00	10.00
Storage Coeff. (min)=	1.05 (ii)	6.90 (ii)
Unit Hyd. Tpeak (min)=	5.00	10.00
Unit Hyd. peak (cms)=	0.34	0.14

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.04	0.041 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	96.65	62.55	62.57
TOTAL RAINFALL (mm)=	98.65	98.65	98.65
RUNOFF COEFFICIENT =	0.98	0.63	0.63

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | ADD HYD ( 0902) |  
 | 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
 (ha) (cms) (hrs) (mm)  
 ID1= 1 ( 0102): 0.55 0.026 12.67 36.76  
 + ID2= 2 ( 0302): 0.20 0.041 12.25 62.57  
 -----  
 ID = 3 ( 0902): 0.75 0.055 12.33 43.64

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0301) | Area (ha)= 0.35  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250
Max.Eff.Inten.(mm/hr)=	120.75	190.08
over (min)	5.00	5.00
Storage Coeff. (min)=	1.24 (ii)	3.08 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.33	0.27

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.09	0.093 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25



```

RUNOFF VOLUME (mm)= 96.65 65.65 65.68
TOTAL RAINFALL (mm)= 98.65 98.65 98.65
RUNOFF COEFFICIENT = 0.98 0.67 0.67

```

\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00
|-----| U.H. Tp(hrs)= 0.39

```

Unit Hyd Qpeak (cms)= 0.072

```

PEAK FLOW (cms)= 0.048 (i)
TIME TO PEAK (hrs)= 12.500
RUNOFF VOLUME (mm)= 40.040
TOTAL RAINFALL (mm)= 98.650
RUNOFF COEFFICIENT = 0.406

```

- (i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0901) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
|-----| (ha) (cms) (hrs) (mm)
ID1= 1 ( 0101): 0.74 0.048 12.50 40.04
+ ID2= 2 ( 0301): 0.35 0.093 12.25 65.68
=====
ID = 3 ( 0901): 1.09 0.122 12.25 48.27

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

=====
V V I SSSSS U U A A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U AAAAA L

```

```

V V I SS U U A A L
V V I SSSSS UUUUU A A LLLLL

```

```

000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y M M 0 0
000 T T H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2020 Smart City Water Inc  
All rights reserved.

\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voindat

Output filename:  
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\fb662b4-1edd-432a-810d-c2eed9babf0a\s  
Summary filename:  
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\fb662b4-1edd-432a-810d-c2eed9babf0a\s

DATE: 02-25-2022

TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

```

-----
*****
** SIMULATION : (5) 50 Year Design Storm - SC **
*****

```

```

-----
| READ STORM | Filename: C:\Users\KGowanlock\AppData
| | ata\Local\Temp\
| | 9c1599e0-5705-4571-9428-977ab3d9d9a7\ee650115
| Ptotal=109.84 mm | Comments: 50yr 24hr 15min SCS
|-----|

```

```

TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.25 0.00 | 6.50 1.98 | 12.75 15.82 | 19.00 1.98

```

0.50	1.21	6.75	1.98	13.00	8.13	19.25	1.98
0.75	1.21	7.00	1.98	13.25	8.13	19.50	1.98
1.00	1.21	7.25	1.98	13.50	5.93	19.75	1.98
1.25	1.21	7.50	2.42	13.75	5.93	20.00	1.98
1.50	1.21	7.75	2.42	14.00	4.61	20.25	1.98
1.75	1.21	8.00	2.42	14.25	4.61	20.50	1.32
2.00	1.21	8.25	2.42	14.50	3.30	20.75	1.32
2.25	1.21	8.50	2.86	14.75	3.30	21.00	1.32
2.50	1.43	8.75	2.86	15.00	3.30	21.25	1.32
2.75	1.43	9.00	3.08	15.25	3.30	21.50	1.32
3.00	1.43	9.25	3.08	15.50	3.30	21.75	1.32
3.25	1.43	9.50	3.51	15.75	3.30	22.00	1.32
3.50	1.43	9.75	3.51	16.00	3.30	22.25	1.32
3.75	1.43	10.00	3.95	16.25	3.30	22.50	1.32
4.00	1.43	10.25	3.95	16.50	1.98	22.75	1.32
4.25	1.43	10.50	5.05	16.75	1.98	23.00	1.32
4.50	1.76	10.75	5.05	17.00	1.98	23.25	1.32
4.75	1.76	11.00	6.81	17.25	1.98	23.50	1.32
5.00	1.76	11.25	6.81	17.50	1.98	23.75	1.32
5.25	1.76	11.50	10.54	17.75	1.98	24.00	1.32
5.50	1.76	11.75	10.54	18.00	1.98	24.25	1.32
5.75	1.76	12.00	32.51	18.25	1.98		
6.00	1.76	12.25	134.44	18.50	1.98		
6.25	1.76	12.50	15.82	18.75	1.98		

-----  
| CALIB |  
| NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0  
| ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00  
-----  
U.H. Tp(hrs)= 0.52

Unit Hyd Qpeak (cms)= 0.040  
PEAK FLOW (cms)= 0.032 (i)  
TIME TO PEAK (hrs)= 12.667  
RUNOFF VOLUME (mm)= 44.310  
TOTAL RAINFALL (mm)= 109.840  
RUNOFF COEFFICIENT = 0.403

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0302) | Area (ha)= 0.20  
| ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10  
-----

IMPERVIOUS PERVIOUS (i)

Surface Area (ha)= 0.09 0.11  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 2.00  
Length (m)= 36.51 40.00  
Mannings n = 0.013 0.250  
Max.Eff.Inten.(mm/hr)= 134.44 184.31  
over (min) 5.00 10.00  
Storage Coeff. (min)= 1.01 (ii) 6.53 (ii)  
Unit Hyd. Tpeak (min)= 5.00 10.00  
Unit Hyd. peak (cms)= 0.34 0.14  
PEAK FLOW (cms)= 0.00 0.05  
TIME TO PEAK (hrs)= 12.25 12.25  
RUNOFF VOLUME (mm)= 107.84 72.49  
TOTAL RAINFALL (mm)= 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.66

\*TOTALS\*  
0.049 (iii)  
12.25  
72.51  
109.84  
0.66

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0902) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0102): 0.55 0.032 12.67 44.31  
+ ID2= 2 ( 0302): 0.20 0.049 12.25 72.51  
=====

ID = 3 ( 0902): 0.75 0.064 12.33 51.83  
NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0301) | Area (ha)= 0.35  
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10  
-----

IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.17 0.17  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 8.00

Length (m)= 48.30 13.00  
Mannings n = 0.013 0.250  
Max.Eff.Inten.(mm/hr)= 134.44 218.28  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.19 (ii) 2.93 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.33 0.28

\*TOTALS\*  
PEAK FLOW (cms)= 0.00 0.11 0.107 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 107.84 75.80 75.82  
TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.69 0.69

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
| U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072  
PEAK FLOW (cms)= 0.057 (i)  
TIME TO PEAK (hrs)= 12.500  
RUNOFF VOLUME (mm)= 47.994  
TOTAL RAINFALL (mm)= 109.840  
RUNOFF COEFFICIENT = 0.437

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0901) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0101): 0.74 0.057 12.50 47.99  
+ ID2= 2 ( 0301): 0.35 0.107 12.25 75.82

=====

ID = 3 ( 0901): 1.09 0.142 12.25 56.93

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
=====

V V I SSSSS U U A L (v 6.1.2001)  
V V I SS U U A A L  
V V I SS U U A A A A L  
V V I SS U U A A L  
VV I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
O O T T H H Y Y MM MM O O  
O O T T H H Y M M O O  
000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2020 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\414f2bd-3a31-4910-a0be-4653217bf096\s  
Summary filename:  
C:\Users\KGowanlock\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\414f2bd-3a31-4910-a0be-4653217bf096\s

DATE: 02-25-2022

TIME: 10:42:09

USER:

COMMENTS: \_\_\_\_\_

-----  
\*\*\*\*\*  
\*\* SIMULATION : (6) 100 Year Design Storm - S \*\*  
\*\*\*\*\*

READ STORM | Filename: C:\Users\KGowanlock\AppData  
 Local\Temp\  
 9c1599e0-5705-4571-9428-977ab3d9d9a7\3c054a99  
 Ptotal=120.77 mm | Comments: 100yr 24hr 15min SCS

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.25	0.00	6.50	2.17	12.75	17.39	19.00	2.17
0.50	1.33	6.75	2.17	13.00	8.94	19.25	2.17
0.75	1.33	7.00	2.17	13.25	8.94	19.50	2.17
1.00	1.33	7.25	2.17	13.50	6.52	19.75	2.17
1.25	1.33	7.50	2.66	13.75	6.52	20.00	2.17
1.50	1.33	7.75	2.66	14.00	5.07	20.25	2.17
1.75	1.33	8.00	2.66	14.25	5.07	20.50	1.45
2.00	1.33	8.25	2.66	14.50	3.62	20.75	1.45
2.25	1.33	8.50	3.14	14.75	3.62	21.00	1.45
2.50	1.57	8.75	3.14	15.00	3.62	21.25	1.45
2.75	1.57	9.00	3.38	15.25	3.62	21.50	1.45
3.00	1.57	9.25	3.38	15.50	3.62	21.75	1.45
3.25	1.57	9.50	3.86	15.75	3.62	22.00	1.45
3.50	1.57	9.75	3.86	16.00	3.62	22.25	1.45
3.75	1.57	10.00	4.35	16.25	3.62	22.50	1.45
4.00	1.57	10.25	4.35	16.50	2.17	22.75	1.45
4.25	1.57	10.50	5.56	16.75	2.17	23.00	1.45
4.50	1.93	10.75	5.56	17.00	2.17	23.25	1.45
4.75	1.93	11.00	7.49	17.25	2.17	23.50	1.45
5.00	1.93	11.25	7.49	17.50	2.17	23.75	1.45
5.25	1.93	11.50	11.59	17.75	2.17	24.00	1.45
5.50	1.93	11.75	11.59	18.00	2.17	24.25	1.45
5.75	1.93	12.00	35.75	18.25	2.17		
6.00	1.93	12.25	147.82	18.50	2.17		
6.25	1.93	12.50	17.39	18.75	2.17		

CALIB |  
 NASHYD ( 0102) | Area (ha)= 0.55 Curve Number (CN)= 67.0  
 ID= 1 DT= 5.0 min | Ia (mm)= 10.00 # of Linear Res.(N)= 3.00  
 U.H. Tp(hrs)= 0.52

Unit Hyd Qpeak (cms)= 0.040  
 PEAK FLOW (cms)= 0.037 (i)  
 TIME TO PEAK (hrs)= 12.667  
 RUNOFF VOLUME (mm)= 52.015  
 TOTAL RAINFALL (mm)= 120.770

RUNOFF COEFFICIENT = 0.431

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB |  
 STANDHYD ( 0302) | Area (ha)= 0.20  
 ID= 1 DT= 5.0 min | Total Imp(%)= 43.00 Dir. Conn.(%)= 0.10

IMPERVIOUS PERVIOUS (i)  
 Surface Area (ha)= 0.09 0.11  
 Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 2.00  
 Length (m)= 36.51 40.00  
 Mannings n = 0.013 0.250

Max.Eff.Inten.(mm/hr)= 147.82 208.43  
 over (min)= 5.00 10.00  
 Storage Coeff. (min)= 0.97 (ii) 6.23 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.34 0.15

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.06 0.056 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.25 12.25  
 RUNOFF VOLUME (mm)= 118.77 82.35 82.38  
 TOTAL RAINFALL (mm)= 120.77 120.77 120.77  
 RUNOFF COEFFICIENT = 0.98 0.68 0.68

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)  
 (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.  
 (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0902) |  
 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
 (ha) (cms) (hrs) (mm)  
 ID1= 1 ( 0102): 0.55 0.037 12.67 52.01  
 + ID2= 2 ( 0302): 0.20 0.056 12.25 82.38  
 =====  
 ID = 3 ( 0902): 0.75 0.074 12.33 60.11

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0301) | Area (ha)= 0.35  
| ID= 1 DT= 5.0 min | Total Imp(%)= 50.00 Dir. Conn.(%)= 0.10  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.17	0.17
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	8.00
Length (m)=	48.30	13.00
Mannings n =	0.013	0.250

Max.Eff.Inten.(mm/hr)=	147.82	245.96
over (min)	5.00	5.00
Storage Coeff. (min)=	1.15 (ii)	2.80 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.28

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.12	0.121 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	118.77	85.85	85.87
TOTAL RAINFALL (mm)=	120.77	120.77	120.77
RUNOFF COEFFICIENT =	0.98	0.71	0.71

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| NASHYD ( 0101) | Area (ha)= 0.74 Curve Number (CN)= 69.7  
| ID= 1 DT= 5.0 min | Ia (mm)= 9.15 # of Linear Res.(N)= 3.00  
-----  
U.H. Tp(hrs)= 0.39

Unit Hyd Qpeak (cms)= 0.072

PEAK FLOW (cms)=	0.067 (i)
TIME TO PEAK (hrs)=	12.500
RUNOFF VOLUME (mm)=	56.076
TOTAL RAINFALL (mm)=	120.770
RUNOFF COEFFICIENT =	0.464

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.


-----  
| ADD HYD ( 0901) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
-----  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0101): 0.74 0.067 12.50 56.08  
+ ID2= 2 ( 0301): 0.35 0.121 12.25 85.87  
=====

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
FINISH  
=====

# Appendix B: Post-Development SWM Calculations

**CRANBERRY MARSH ESTATES  
PROPOSED CONDITIONS**

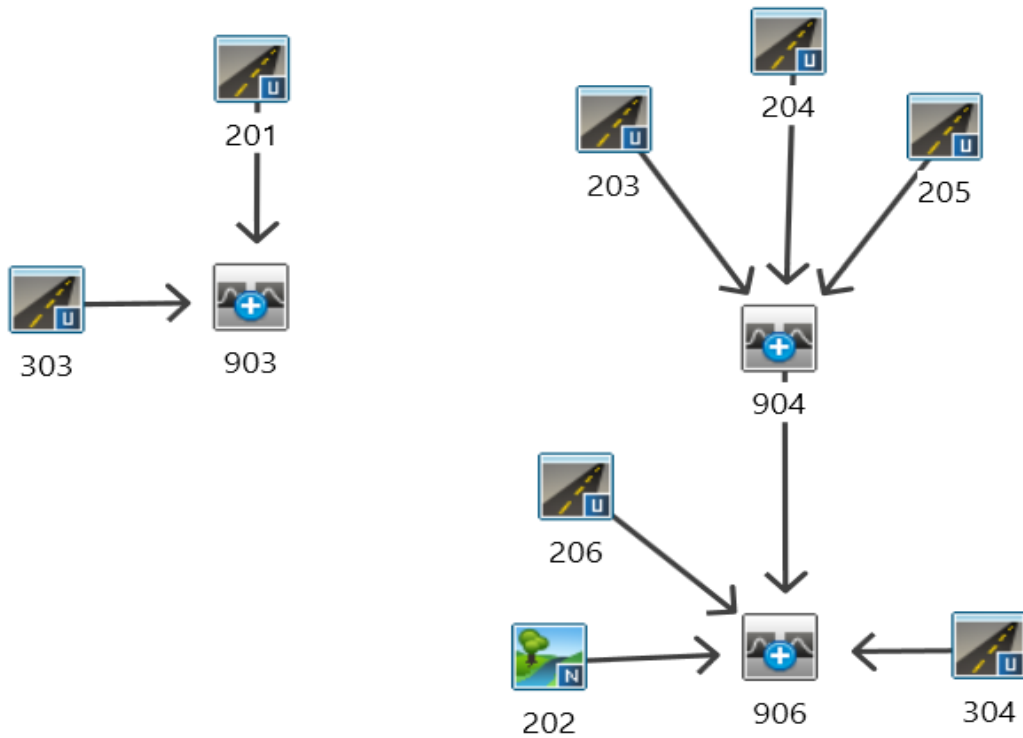

Nashyd



Standhyd



Addhyd



Route Pipe



Route Channel



Route Reservoir



Duhyd



Diverthyd



**Project:** Cranberry Marsh Estates

**File No.:** 120181

**Subject:** Otthymo Flow Schematic

**Date:** Jul-23

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

John Birchard	July 25, 2023
---------------	---------------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	201
Catchment Area (ha):	0.23
Impervious %:	38%
Pervious Area (ha):	0.14

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

Soil Symbol		Pal							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.14							
Percentage of Catchment		100%							
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.14	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00



**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

John Birchard	July 25, 2023
---------------	---------------

**Pre-Development Condition**

Watershed:	NVCA
Catchment ID:	202
Catchment Area (ha):	0.29
Impervious %:	10%

**Average Curve Number (CN), Runoff Coefficient (C) and Initial Abstraction (IA)**

Soil Symbol	Pal												
Soil Series	Parkhill												
Hydrologic Soils Group	BC												
Soil Texture	Loam or Silt Loam												
Runoff Coefficient Type	2												
Area (ha)	0.29												
Percentage of Catchment	100%												
Land Cover Category	IA	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C	A (ha)	CN	C
Impervious	2	0.03	100	0.95									
Gravel	3		89	0.27									
Woodland	10		67	0.25									
Pasture/Lawns	5	0.26	74	0.28									
Meadows	8		71	0.27									
Cultivated	7		78	0.35									
Waterbody	12		50	0.05									
Average CN	76.50												
Average C	0.34												
Average IA	4.71												

**Time to Peak Calculations**

Max. Catchment Elev. (m):	180.30
Min. Catchment Elev. (m):	179.37
Catchment Length (m):	110
Catchment Slope (%):	0.85%
Method:	Airport Method
Time of Concentration (mins):	27.30

**Summary**

Catchment CN:	76.5
Catchment C:	0.34
Catchment IA (mm):	4.71
Time of Concentration (hrs):	0.46
Catchment Time to Peak (hrs):	0.30
Catchment Time Step (mins):	3.64

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

Kyle Gowanlock	Dec 2022
----------------	----------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	203
Catchment Area (ha):	0.08
Impervious %:	69%
Pervious Area (ha):	0.02

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

<b>Soil Symbol</b>		<b>Pal</b>							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.02							
Percentage of Catchment		100%							
<b>Land Cover Category</b>	<b>IA</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.02	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

Kyle Gowanlock	Dec 2022
----------------	----------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	204
Catchment Area (ha):	0.24
Impervious %:	65%
Pervious Area (ha):	0.08

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

Soil Symbol		Pal							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.08							
Percentage of Catchment		100%							
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.08	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

Kyle Gowanlock	Dec 2022
----------------	----------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	205
Catchment Area (ha):	0.23
Impervious %:	64%
Pervious Area (ha):	0.08

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

Soil Symbol		Pal							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.08							
Percentage of Catchment		100%							
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.08	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

John Birchard	July 25, 2023
---------------	---------------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	206
Catchment Area (ha):	0.18
Impervious %:	66%
Pervious Area (ha):	0.06

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

Soil Symbol		Pal							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.06							
Percentage of Catchment		100%							
Land Cover Category	IA	A (ha)	CN	A (ha)	CN	A (ha)	CN	A (ha)	CN
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.06	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

John Birchard	July 25, 2023
---------------	---------------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	303
Catchment Area (ha):	0.33
Impervious %:	30%
Pervious Area (ha):	0.23

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

<b>Soil Symbol</b>		<b>Pal</b>							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.23							
Percentage of Catchment		100%							
<b>Land Cover Category</b>	<b>IA</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.23	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

**Project Details**

Cranberry Marsh Estates	120181
-------------------------	--------

**Data Sources**

Detailed Soil Survey Reports for Ontario, NVCA Stormwater Technical Guide (2013), MTO Drainage Management Manual (1997)
---

**Prepared By**

John Birchard	July 25, 2023
---------------	---------------

**Post Development Condition**

Watershed:	NVCA
Catchment ID:	304
Catchment Area (ha):	0.23
Impervious %:	31%
Pervious Area (ha):	0.16

**Average Curve Number (CN) and Initial Abstraction (IA) for Pervious Area**

<b>Soil Symbol</b>		<b>Pal</b>							
Soil Series		Parkhill							
Hydrologic Soils Group		BC							
Soil Texture		Loam or Silt Loam							
Runoff Coefficient Type		2							
Area (ha)		0.16							
Percentage of Catchment		100%							
<b>Land Cover Category</b>	<b>IA</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>	<b>A (ha)</b>	<b>CN</b>
Impervious	2		100						
Gravel	3		89						
Woodland	10		67						
Pasture/Lawns	5	0.16	74						
Meadows	8		71						
Cultivated	7		78						
Waterbody	12		50						
Average CN		74.00							
Average IA		5.00							

**Notes**

CN and IA values have been calculated for the pervious area of the catchment only.
--

**Summary**

Catchment CN:	74.0
Catchment IA (mm):	5.00

=====

```
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
WV I SSSS UUUU A A LLLLL
```

```
000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y M M O O
O O T T H H Y M M O O
000 T T H H Y M M 000
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\b49f3285-b7f2-476b-8379-07046e3e8b72\sc

Summary filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\b49f3285-b7f2-476b-8379-07046e3e8b72\sc

DATE: 07/25/2023

TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

```
*****
** SIMULATION : (1) 25mm Design Storm **
*****
```

```
-----
| READ STORM | Filename: C:\Users\JBirchard\AppData\Local\Temp\
|
```

```
| 3eb8d076-4e62-4c3a-b26f-53c9bf58a78b\afe4e812
| Ptotal= 24.97 mm | Comments: 25MM BARRIE
```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.10	0.00	1.20	2.81	2.30	8.44	3.40	1.76
0.20	1.29	1.30	3.22	2.40	6.21	3.50	1.65
0.30	1.36	1.40	3.77	2.50	4.91	3.60	1.55
0.40	1.44	1.50	4.55	2.60	4.06	3.70	1.46
0.50	1.53	1.60	5.77	2.70	3.47	3.80	1.39
0.60	1.63	1.70	7.86	2.80	3.03	3.90	1.32
0.70	1.75	1.80	12.27	2.90	2.70	4.00	1.26
0.80	1.89	1.90	26.17	3.00	2.43	4.10	1.20
0.90	2.06	2.00	72.58	3.10	2.22		
1.00	2.26	2.10	26.96	3.20	2.04		
1.10	2.50	2.20	13.05	3.30	1.89		

```
-----
| CALIB |
| NASHYD ( 0202) | Area (ha)= 0.29 Curve Number (CN)= 76.5
| ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
| U.H. Tp(hrs)= 0.30
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.003 (i)  
 TIME TO PEAK (hrs)= 2.333  
 RUNOFF VOLUME (mm)= 4.165



TOTAL RAINFALL (mm)= 24.951  
 RUNOFF COEFFICIENT = 0.167

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0204) | Area (ha)= 0.24
| ID= 1 DT= 5.0 min | Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00
-----
| IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.16   0.08
Dep. Storage (mm)= 2.00   5.00
Average Slope (%)= 2.00   1.00
Length (m)= 40.00   8.00
Mannings n = 0.013   0.250
  
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max. Eff. Inten. (mm/hr)= 72.58 30.18  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.36 (ii) 5.08 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*  
 PEAK FLOW (cms)= 0.02 0.01 0.021 (iii)  
 TIME TO PEAK (hrs)= 2.00 2.08 2.00  
 RUNOFF VOLUME (mm)= 22.95 6.95 12.69  
 TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.28 0.51

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0206) | Area (ha)= 0.18
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00
-----
| IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.12   0.06
Dep. Storage (mm)= 2.00   5.00
Average Slope (%)= 2.00   1.00
Length (m)= 34.64   8.00
Mannings n = 0.013   0.250
  
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max. Eff. Inten. (mm/hr)= 72.58 12.22  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 1.25 (ii) 4.25 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.33 0.24

\*TOTALS\*  
 PEAK FLOW (cms)= 0.02 0.00 0.024 (iii)  
 TIME TO PEAK (hrs)= 2.00 2.00 2.00  
 RUNOFF VOLUME (mm)= 22.95 4.44 15.54

TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.18 0.62

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB |
| STANDHYD ( 0203) | Area (ha)= 0.08
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00
-----
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max.Eff.Inten.(mm/hr)= 72.58 35.74  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.98 (ii) 4.45 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.23

\*TOTALS\*

PEAK FLOW (cms)= 0.01 0.00 0.009 (iii)  
 TIME TO PEAK (hrs)= 2.00 2.00 2.00  
 RUNOFF VOLUME (mm)= 22.95 7.51 13.36  
 TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.30 0.54

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB |
| STANDHYD ( 0205) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00
-----
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max.Eff.Inten.(mm/hr)= 72.58 27.73  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.34 (ii) 5.06 (ii)

Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

PEAK FLOW (cms)= 0.02 0.01  
 TIME TO PEAK (hrs)= 2.00 2.08  
 RUNOFF VOLUME (mm)= 22.95 6.68  
 TOTAL RAINFALL (mm)= 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.27

\*TOTALS\*  
 0.020 (iii)  
 2.00  
 12.68  
 24.95  
 0.51

ID = 3 ( 0904): 0.73 0.074 2.00 13.47

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB  
 STANDHYD ( 0304) | Area (ha)= 0.23  
 ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

IMPERVIOUS PERVIOUS (i)  
 Surface Area (ha)= 0.07 0.16  
 Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 0.50  
 Length (m)= 39.16 100.00  
 Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

ADD HYD ( 0904)  
 1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0203):	0.08	0.009	2.00	13.36
+ ID2= 2 ( 0204):	0.24	0.021	2.00	12.69
=====				
ID = 3 ( 0904):	0.32	0.030	2.00	12.86

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0904)  
 3 + 2 = 1

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 3 ( 0904):	0.32	0.030	2.00	12.86
+ ID2= 2 ( 0205):	0.23	0.020	2.00	12.68
=====				
ID = 1 ( 0904):	0.55	0.050	2.00	12.79

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0904)  
 1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0904):	0.55	0.050	2.00	12.79
+ ID2= 2 ( 0206):	0.18	0.024	2.00	15.54
=====				

----- TRANSFORMED HYETOGRAPH -----

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max. Eff. Inten. (mm/hr)= 72.58 5.83  
 over (min) = 5.00 60.00  
 Storage Coeff. (min)= 1.34 (ii) 59.14 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 60.00  
 Unit Hyd. peak (cms)= 0.33 0.02

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.00 0.002 (iii)  
 TIME TO PEAK (hrs)= 2.00 3.00 2.00  
 RUNOFF VOLUME (mm)= 22.95 5.28 6.01  
 TOTAL RAINFALL (mm)= 24.95 24.95 24.95  
 RUNOFF COEFFICIENT = 0.92 0.21 0.24

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%

YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.003	2.33	4.17
+ ID2= 2 ( 0304):	0.23	0.002	2.00	6.01
=====				
ID = 3 ( 0906):	0.52	0.004	2.33	4.98

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
3 + 2 = 1	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.52	0.004	2.33	4.98
+ ID2= 2 ( 0904):	0.73	0.074	2.00	13.47
=====				
ID = 1 ( 0906):	1.25	0.077	2.00	9.94

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB	Area (ha)=	Dir. Conn.(%)=
STANDHYD ( 0201)	0.23	5.00
ID= 1 DT= 5.0 min	Total Imp(%)= 38.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----  
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN

hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	1.167	2.75	2.250	10.28	3.33	1.84
0.167	1.03	1.250	3.06	2.333	7.55	3.42	1.74
0.250	1.33	1.333	3.44	2.417	5.95	3.50	1.65
0.333	1.39	1.417	3.93	2.500	4.91	3.58	1.55
0.417	1.46	1.500	4.55	2.583	4.06	3.67	1.48
0.500	1.53	1.583	5.77	2.667	3.59	3.75	1.42
0.583	1.63	1.667	7.44	2.750	3.21	3.83	1.36
0.667	1.73	1.750	10.51	2.833	2.90	3.92	1.31
0.750	1.83	1.833	17.83	2.917	2.65	4.00	1.26
0.833	1.96	1.917	35.45	3.000	2.43	4.08	1.20
0.917	2.10	2.000	72.58	3.083	2.22		
1.000	2.26	2.083	26.96	3.167	2.08		
1.083	2.50	2.167	15.83	3.250	1.95		

Max.Eff.Inten.(mm/hr)=	72.58	7.25
over (min)	5.00	65.00
Storage Coeff. (min)=	1.34 (ii)	64.82 (ii)
Unit Hyd. Tpeak (min)=	5.00	65.00
Unit Hyd. peak (cms)=	0.33	0.02

		*TOTALS*
PEAK FLOW (cms)=	0.00	0.00
TIME TO PEAK (hrs)=	2.00	3.08
RUNOFF VOLUME (mm)=	22.95	5.88
TOTAL RAINFALL (mm)=	24.95	24.95
RUNOFF COEFFICIENT =	0.92	0.24
		0.002 (iii)

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	Area (ha)=	Dir. Conn.(%)=
STANDHYD ( 0303)	0.33	5.00
ID= 1 DT= 5.0 min	Total Imp(%)= 30.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

---- TRANSFORMED HYETOGRAPH ----
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 0.00 | 1.167 2.75 | 2.250 10.28 | 3.33 1.84
0.167 1.03 | 1.250 3.06 | 2.333 7.55 | 3.42 1.74
0.250 1.33 | 1.333 3.44 | 2.417 5.95 | 3.50 1.65
0.333 1.39 | 1.417 3.93 | 2.500 4.91 | 3.58 1.55
0.417 1.46 | 1.500 4.55 | 2.583 4.06 | 3.67 1.48
0.500 1.53 | 1.583 5.77 | 2.667 3.59 | 3.75 1.42
0.583 1.63 | 1.667 7.44 | 2.750 3.21 | 3.83 1.36
0.667 1.73 | 1.750 10.51 | 2.833 2.90 | 3.92 1.31
0.750 1.83 | 1.833 17.83 | 2.917 2.65 | 4.00 1.26
0.833 1.96 | 1.917 35.45 | 3.000 2.43 | 4.08 1.20
0.917 2.10 | 2.000 72.58 | 3.083 2.22 |
1.000 2.26 | 2.083 26.96 | 3.167 2.08 |
1.083 2.50 | 2.167 15.83 | 3.250 1.95 |

```

```

Max.Eff.Inten.(mm/hr)= 72.58 5.65
over (min) = 5.00 75.00
Storage Coeff. (min)= 1.50 (ii) 71.60 (ii)
Unit Hyd. Tpeak (min)= 5.00 75.00
Unit Hyd. peak (cms)= 0.33 0.02

PEAK FLOW (cms)= 0.00 0.00 0.003 (iii)
TIME TO PEAK (hrs)= 2.00 3.25 2.00
RUNOFF VOLUME (mm)= 22.95 5.20 5.96
TOTAL RAINFALL (mm)= 24.95 24.95 24.95
RUNOFF COEFFICIENT = 0.92 0.21 0.24

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0903) |
| 1 + 2 = 3 |
-----
      AREA  QPEAK  TPEAK  R.V.
      (ha)   (cms)  (hrs)  (mm)
ID1= 1 ( 0201): 0.23 0.002 2.00 6.57
+ ID2= 2 ( 0303): 0.33 0.003 2.00 5.96

```

```

=====
ID = 3 ( 0903): 0.56 0.006 2.00 6.21

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
=====

```

```

V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSS UUUU A A LLLLL

```

```

OOO TTTT TTTT H H Y Y M M OOO TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
OOO T T H H Y M M OOO
Developed and Distributed by Smart City Water Inc
Copyright 2007 - 2020 Smart City Water Inc
All rights reserved.

```

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

```

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat
Output filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\b6d
9c41f-d014-42bb-81f3-be852c6adf65\sc
Summary filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\b6d
9c41f-d014-42bb-81f3-be852c6adf65\sc

```

DATE: 07/25/2023 TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

```

-----
*****
** SIMULATION : (2) 2 Year Design Storm - Chi **
*****

```

```

-----
| CHICAGO STORM |
| Ptotal= 31.69 mm |
-----

```

IDF curve parameters: A= 365.657  
 B= 0.000  
 C= 0.699

used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	2.76	1.17	12.83	2.17	5.19	3.17	3.02
0.33	3.08	1.33	73.13	2.33	4.58	3.33	2.84
0.50	3.51	1.50	15.38	2.50	4.12	3.50	2.69
0.67	4.13	1.67	9.64	2.67	3.76	3.67	2.56
0.83	5.11	1.83	7.34	2.83	3.47	3.83	2.44
1.00	6.98	2.00	6.04	3.00	3.23	4.00	2.33

TIME TO PEAK (hrs)= 1.667  
 RUNOFF VOLUME (mm)= 6.929  
 TOTAL RAINFALL (mm)= 31.693  
 RUNOFF COEFFICIENT = 0.219

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0204) |
| ID= 1 DT= 5.0 min |
-----

```

Area (ha)= 0.24  
 Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
| CALIB |
| NASHYD ( 0202) |
| ID= 1 DT= 5.0 min |
-----

```

Area (ha)= 0.29 Curve Number (CN)= 76.5  
 Ia (mm)= 4.71 # of Linear Res.(N)= 3.00  
 U.H. Tp(hrs)= 0.30

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max. Eff. Inten. (mm/hr)= 73.13 39.84  
 over (min) = 5.00 10.00  
 Storage Coeff. (min)= 1.36 (ii) 5.06 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*

PEAK FLOW (cms)= 0.02 0.01 0.024 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.42 1.33  
 RUNOFF VOLUME (mm)= 29.69 10.78 17.58  
 TOTAL RAINFALL (mm)= 31.69 31.69 31.69  
 RUNOFF COEFFICIENT = 0.94 0.34 0.55

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.004 (i)

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB		STANDHYD ( 0206)		ID= 1 DT= 5.0 min	
Area (ha)=	0.18	Total Imp(%)=	66.00	Dir. Conn.(%)=	60.00
IMPERVIOUS		PERVIOUS (i)			
Surface Area (ha)=	0.12		0.06		
Dep. Storage (mm)=	2.00		5.00		
Average Slope (%)=	2.00		1.00		
Length (m)=	34.64		8.00		
Mannings n =	0.013		0.250		

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max.Eff.Inten.(mm/hr)=	73.13	15.67
over (min)	5.00	5.00
Storage Coeff. (min)=	1.24 (ii)	4.23 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.33	0.24

PEAK FLOW (cms)=	0.02	0.00	0.025 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	29.69	7.29	20.71

\*TOTALS\*

TOTAL RAINFALL (mm)=	31.69	31.69	31.69
RUNOFF COEFFICIENT =	0.94	0.23	0.65

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB		STANDHYD ( 0203)		ID= 1 DT= 5.0 min	
Area (ha)=	0.08	Total Imp(%)=	69.00	Dir. Conn.(%)=	38.00
IMPERVIOUS		PERVIOUS (i)			
Surface Area (ha)=	0.06		0.02		
Dep. Storage (mm)=	2.00		5.00		
Average Slope (%)=	2.00		1.00		
Length (m)=	23.09		8.00		
Mannings n =	0.013		0.250		

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max.Eff.Inten.(mm/hr)=	73.13	47.40
over (min)	5.00	5.00
Storage Coeff. (min)=	0.98 (ii)	4.43 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.23

PEAK FLOW (cms)=	0.01	0.00	0.009 (iii)
------------------	------	------	-------------

\*TOTALS\*

TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 29.69 11.55 18.40  
 TOTAL RAINFALL (mm)= 31.69 31.69 31.69  
 RUNOFF COEFFICIENT = 0.94 0.36 0.58

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB
| STANDHYD ( 0205) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00
-----
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max. Eff. Inten. (mm/hr)= 73.13 36.52  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.34 (ii) 5.05 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

PEAK FLOW (cms)= 0.02 0.01 0.023 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.42 1.33  
 RUNOFF VOLUME (mm)= 29.69 10.42 17.54  
 TOTAL RAINFALL (mm)= 31.69 31.69 31.69  
 RUNOFF COEFFICIENT = 0.94 0.33 0.55

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
|-----| (ha) (cms) (hrs) (mm)
ID1= 1 ( 0203): 0.08 0.009 1.33 18.40
+ ID2= 2 ( 0204): 0.24 0.024 1.33 17.58
=====
ID = 3 ( 0904): 0.32 0.033 1.33 17.79
-----
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 | AREA QPEAK TPEAK R.V.
|-----| (ha) (cms) (hrs) (mm)
ID1= 3 ( 0904): 0.32 0.033 1.33 17.79
+ ID2= 2 ( 0205): 0.23 0.023 1.33 17.54
=====
ID = 1 ( 0904): 0.55 0.056 1.33 17.68
-----
```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
|-----| (ha) (cms) (hrs) (mm)
ID1= 1 ( 0904): 0.55 0.056 1.33 17.68
+ ID2= 2 ( 0206): 0.18 0.025 1.33 20.71
=====
ID = 3 ( 0904): 0.73 0.081 1.33 18.43
-----
```



NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00
-----

```

```

                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.07      0.16
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     0.50
Length (m)= 39.16         100.00
Mannings n = 0.013       0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
                ---- TRANSFORMED HYETOGRAPH ----
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 2.76 | 1.083 12.83 | 2.083 5.19 | 3.08 3.02
0.167 2.76 | 1.167 12.83 | 2.167 5.19 | 3.17 3.02
0.250 3.08 | 1.250 73.13 | 2.250 4.58 | 3.25 2.84
0.333 3.08 | 1.333 73.13 | 2.333 4.58 | 3.33 2.84
0.417 3.51 | 1.417 15.38 | 2.417 4.12 | 3.42 2.69
0.500 3.51 | 1.500 15.38 | 2.500 4.12 | 3.50 2.69
0.583 4.13 | 1.583 9.64 | 2.583 3.76 | 3.58 2.56
0.667 4.13 | 1.667 9.64 | 2.667 3.76 | 3.67 2.56
0.750 5.11 | 1.750 7.34 | 2.750 3.47 | 3.75 2.44
0.833 5.11 | 1.833 7.34 | 2.833 3.47 | 3.83 2.44
0.917 6.98 | 1.917 6.04 | 2.917 3.23 | 3.92 2.33
1.000 6.98 | 2.000 6.04 | 3.000 3.23 | 4.00 2.33

```

```

Max.Eff.Inten.(mm/hr)= 73.13      8.56
over (min) 5.00      55.00
Storage Coeff. (min)= 1.34 (ii) 50.90 (ii)
Unit Hyd. Tpeak (min)= 5.00      55.00
Unit Hyd. peak (cms)= 0.33      0.02

```

```

*TOTALS*
PEAK FLOW (cms)= 0.00      0.00      0.003 (iii)
TIME TO PEAK (hrs)= 1.33      2.25      1.33
RUNOFF VOLUME (mm)= 29.69      8.48      9.42
TOTAL RAINFALL (mm)= 31.69      31.69      31.69
RUNOFF COEFFICIENT = 0.94      0.27      0.30

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:

CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0906) |
| 1 + 2 = 3 |
-----
                AREA    QPEAK    TPEAK    R.V.
                (ha)    (cms)    (hrs)    (mm)
ID1= 1 ( 0202): 0.29 0.004 1.67 6.93
+ ID2= 2 ( 0304): 0.23 0.003 1.33 9.42
=====
ID = 3 ( 0906): 0.52 0.005 1.67 8.03

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0906) |
| 3 + 2 = 1 |
-----
                AREA    QPEAK    TPEAK    R.V.
                (ha)    (cms)    (hrs)    (mm)
ID1= 3 ( 0906): 0.52 0.005 1.67 8.03
+ ID2= 2 ( 0904): 0.73 0.081 1.33 18.43
=====
ID = 1 ( 0906): 1.25 0.085 1.33 14.10

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0201) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00
-----

```

```

                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.09      0.14
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     0.70
Length (m)= 39.16         160.00
Mannings n = 0.013       0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
                ---- TRANSFORMED HYETOGRAPH ----
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 2.76 | 1.083 12.83 | 2.083 5.19 | 3.08 3.02
0.167 2.76 | 1.167 12.83 | 2.167 5.19 | 3.17 3.02

```

0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max.Eff.Inten.(mm/hr)= 73.13 9.43  
over (min) 5.00 60.00  
Storage Coeff. (min)= 1.34 (ii) 58.48 (ii)  
Unit Hyd. Tpeak (min)= 5.00 60.00  
Unit Hyd. peak (cms)= 0.33 0.02

PEAK FLOW (cms)= 0.00 0.00  
TIME TO PEAK (hrs)= 1.33 2.33  
RUNOFF VOLUME (mm)= 29.69 9.33  
TOTAL RAINFALL (mm)= 31.69 31.69  
RUNOFF COEFFICIENT = 0.94 0.29

\*TOTALS\*

0.002 (iii)  
1.33  
10.20  
31.69  
0.32

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0303) | Area (ha)= 0.33  
| ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	2.76	1.083	12.83	2.083	5.19	3.08	3.02
0.167	2.76	1.167	12.83	2.167	5.19	3.17	3.02
0.250	3.08	1.250	73.13	2.250	4.58	3.25	2.84
0.333	3.08	1.333	73.13	2.333	4.58	3.33	2.84
0.417	3.51	1.417	15.38	2.417	4.12	3.42	2.69
0.500	3.51	1.500	15.38	2.500	4.12	3.50	2.69
0.583	4.13	1.583	9.64	2.583	3.76	3.58	2.56
0.667	4.13	1.667	9.64	2.667	3.76	3.67	2.56
0.750	5.11	1.750	7.34	2.750	3.47	3.75	2.44
0.833	5.11	1.833	7.34	2.833	3.47	3.83	2.44
0.917	6.98	1.917	6.04	2.917	3.23	3.92	2.33
1.000	6.98	2.000	6.04	3.000	3.23	4.00	2.33

Max.Eff.Inten.(mm/hr)= 73.13 7.44  
over (min) 5.00 65.00  
Storage Coeff. (min)= 1.49 (ii) 64.31 (ii)  
Unit Hyd. Tpeak (min)= 5.00 65.00  
Unit Hyd. peak (cms)= 0.33 0.02

PEAK FLOW (cms)= 0.00 0.00  
TIME TO PEAK (hrs)= 1.33 2.50  
RUNOFF VOLUME (mm)= 29.69 8.37  
TOTAL RAINFALL (mm)= 31.69 31.69  
RUNOFF COEFFICIENT = 0.94 0.26

\*TOTALS\*

0.004 (iii)  
1.33  
9.32  
31.69  
0.29

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0903) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
| (ha) (cms) (hrs) (mm)  
ID1= 1 ( 0201): 0.23 0.002 1.33 10.20  
+ ID2= 2 ( 0303): 0.33 0.004 1.33 9.32  
=====

ID = 3 ( 0903): 0.56 0.006 1.33 9.68

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

FINISH

=====
=====

V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSS UUUU A A LLLLL

OOO TTTT TTTT H H Y Y M M OOO TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
OOO T T H H Y M M OOO

Developed and Distributed by Smart City Water Inc
Copyright 2007 - 2020 Smart City Water Inc
All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\373
0f896-c78c-4061-a7c1-b8969840fa66\sc
Summary filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\373
0f896-c78c-4061-a7c1-b8969840fa66\sc

DATE: 07/25/2023 TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*
\*\* SIMULATION : (3) 5 Year Design Storm - Chi \*\*
\*\*\*\*\*

CHICAGO STORM
Ptotal= 42.00 mm

IDF curve parameters: A= 484.627
B= 0.000
C= 0.699
used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs
Storm time step = 10.00 min
Time to peak ratio = 0.35

Table with 8 columns: TIME, RAIN, TIME, RAIN, TIME, RAIN, TIME, RAIN. Rows show time intervals and corresponding rainfall rates.

CALIB
NASHVD ( 0202)
ID= 1 DT= 5.0 min

Area (ha)= 0.29 Curve Number (CN)= 76.5
Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
U.H. Tp(hrs)= 0.30

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

Table with 8 columns: TIME, RAIN, TIME, RAIN, TIME, RAIN, TIME, RAIN. Rows show transformed hyetograph data.

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.007 (i)

TIME TO PEAK (hrs)= 1.583  
 RUNOFF VOLUME (mm)= 12.054  
 TOTAL RAINFALL (mm)= 42.005  
 RUNOFF COEFFICIENT = 0.287

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0204) | Area (ha)= 0.24
| ID= 1 DT= 5.0 min | Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00
-----
                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.16      0.08
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     1.00
Length (m)= 40.00          8.00
Mannings n = 0.013        0.250
  
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)= 96.92 67.78  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 1.21 (ii) 4.52 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.33 0.23

\*TOTALS\*

PEAK FLOW (cms)= 0.02 0.02 0.039 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 40.00 17.51 25.60  
 TOTAL RAINFALL (mm)= 42.00 42.00 42.00  
 RUNOFF COEFFICIENT = 0.95 0.42 0.61

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0206) | Area (ha)= 0.18
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00
-----
                IMPERVIOUS    PERVIOUS (i)
Surface Area (ha)= 0.12      0.06
Dep. Storage (mm)= 2.00     5.00
Average Slope (%)= 2.00     1.00
Length (m)= 34.64          8.00
Mannings n = 0.013        0.250
  
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)= 96.92 28.90  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 1.11 (ii) 3.78 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*

PEAK FLOW (cms)= 0.03 0.01 0.034 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 40.00 12.55 29.02

TOTAL RAINFALL (mm)= 42.00 42.00 42.00  
 RUNOFF COEFFICIENT = 0.95 0.30 0.69

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB
| STANDHYD ( 0203) | Area (ha)= 0.08
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00
-----
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)= 96.92 79.59  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.87 (ii) 3.96 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.24

\*TOTALS\*

PEAK FLOW (cms)= 0.01 0.01 0.014 (iii)

TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 40.01 18.55 26.66  
 TOTAL RAINFALL (mm)= 42.00 42.00 42.00  
 RUNOFF COEFFICIENT = 0.95 0.44 0.63

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```
-----
| CALIB
| STANDHYD ( 0205) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00
-----
```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)= 96.92 62.56  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 1.20 (ii) 4.51 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.33 0.23

```

*TOTALS*
PEAK FLOW      (cms)=      0.02      0.01      0.037 (iii)
TIME TO PEAK   (hrs)=      1.33      1.33      1.33
RUNOFF VOLUME  (mm)=     40.00     17.00     25.49
TOTAL RAINFALL (mm)=     42.00     42.00     42.00
RUNOFF COEFFICIENT =      0.95      0.40      0.61

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00
-----

```

```

IMPERVIOUS PERVIOUS (i)
Surface Area (ha)= 0.07 0.16
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.50
Length (m)= 39.16 100.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
ID1= 1 ( 0203): AREA QPEAK TPEAK R.V.
                (ha) (cms) (hrs) (mm)
+ ID2= 2 ( 0204): 0.08 0.014 1.33 26.66
                0.24 0.039 1.33 25.60
=====
ID = 3 ( 0904): 0.32 0.053 1.33 25.87

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 |
-----
ID1= 3 ( 0904): AREA QPEAK TPEAK R.V.
                (ha) (cms) (hrs) (mm)
+ ID2= 2 ( 0205): 0.32 0.053 1.33 25.87
                0.23 0.037 1.33 25.49
=====
ID = 1 ( 0904): 0.55 0.090 1.33 25.71

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
ID1= 1 ( 0904): AREA QPEAK TPEAK R.V.
                (ha) (cms) (hrs) (mm)
+ ID2= 2 ( 0206): 0.55 0.090 1.33 25.71
                0.18 0.034 1.33 29.02
=====
ID = 3 ( 0904): 0.73 0.124 1.33 26.53

```

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

```

Max.Eff.Inten.(mm/hr)= 96.92 16.91
over (min) = 5.00 40.00
Storage Coeff. (min)= 1.20 (ii) 38.94 (ii)
Unit Hyd. Tpeak (min)= 5.00 40.00
Unit Hyd. peak (cms)= 0.33 0.03

```

\*TOTALS\*

```

PEAK FLOW      (cms)=      0.00      0.00      0.005 (iii)
TIME TO PEAK   (hrs)=      1.33      1.92      1.92
RUNOFF VOLUME  (mm)=     40.00     14.27     15.45
TOTAL RAINFALL (mm)=     42.00     42.00     42.00
RUNOFF COEFFICIENT =      0.95      0.34      0.37

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:

CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.007	1.58	12.05
+ ID2= 2 ( 0304):	0.23	0.005	1.92	15.45
=====				
ID = 3 ( 0906):	0.52	0.011	1.83	13.56

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
3 + 2 = 1	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.52	0.011	1.83	13.56
+ ID2= 2 ( 0904):	0.73	0.124	1.33	26.53
=====				
ID = 1 ( 0906):	1.25	0.131	1.33	21.13

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB	Area (ha)=	Dir. Conn.(%)=
STANDHYD ( 0201)	0.23	5.00
ID= 1 DT= 5.0 min	Total Imp(%)= 38.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00

0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)=	96.92	19.03
over (min)	5.00	45.00
Storage Coeff. (min)=	1.20 (ii)	44.34 (ii)
Unit Hyd. Tpeak (min)=	5.00	45.00
Unit Hyd. peak (cms)=	0.33	0.03

\*TOTALS\*

PEAK FLOW (cms)=	0.00	0.00	0.005 (iii)
TIME TO PEAK (hrs)=	1.33	2.00	2.00
RUNOFF VOLUME (mm)=	40.00	15.48	16.60
TOTAL RAINFALL (mm)=	42.00	42.00	42.00
RUNOFF COEFFICIENT =	0.95	0.37	0.40

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	Area (ha)=	Dir. Conn.(%)=
STANDHYD ( 0303)	0.33	5.00
ID= 1 DT= 5.0 min	Total Imp(%)= 30.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	3.65	1.083	17.00	2.083	6.88	3.08	4.00
0.167	3.65	1.167	17.00	2.167	6.88	3.17	4.00
0.250	4.08	1.250	96.92	2.250	6.07	3.25	3.77
0.333	4.08	1.333	96.92	2.333	6.07	3.33	3.77
0.417	4.65	1.417	20.39	2.417	5.46	3.42	3.57
0.500	4.65	1.500	20.39	2.500	5.46	3.50	3.57
0.583	5.48	1.583	12.78	2.583	4.98	3.58	3.39
0.667	5.48	1.667	12.78	2.667	4.98	3.67	3.39
0.750	6.78	1.750	9.73	2.750	4.60	3.75	3.23
0.833	6.78	1.833	9.73	2.833	4.60	3.83	3.23
0.917	9.25	1.917	8.01	2.917	4.27	3.92	3.09
1.000	9.25	2.000	8.01	3.000	4.27	4.00	3.09

Max.Eff.Inten.(mm/hr)= 96.92 14.29  
over (min) 5.00 50.00  
Storage Coeff. (min)= 1.33 (ii) 49.71 (ii)  
Unit Hyd. Tpeak (min)= 5.00 50.00  
Unit Hyd. peak (cms)= 0.33 0.02

\*TOTALS\*  
PEAK FLOW (cms)= 0.00 0.01 0.005 (iii)  
TIME TO PEAK (hrs)= 1.33 2.17 2.17  
RUNOFF VOLUME (mm)= 40.00 14.11 15.32  
TOTAL RAINFALL (mm)= 42.00 42.00 42.00  
RUNOFF COEFFICIENT = 0.95 0.34 0.36

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0201):	0.23	0.005	2.00	16.60
+ ID2= 2 ( 0303):	0.33	0.005	2.17	15.32
=====				
ID = 3 ( 0903):	0.56	0.010	2.08	15.84

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

=====
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSS UUUU A A LLLL

000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc
Copyright 2007 - 2020 Smart City Water Inc
All rights reserved.

```

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat  
Output filename:  
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\113  
9407e-2b19-4327-b665-92ac45905195\sc  
Summary filename:  
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\113  
9407e-2b19-4327-b665-92ac45905195\sc

DATE: 07/25/2023 TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

```

*****
** SIMULATION : (4) 10 Year Design Storm - Ch **
*****

```

CHICAGO STORM	IDF curve parameters:
Ptotal= 48.83 mm	A= 563.357
	B= 0.000
	C= 0.699



used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	4.25	1.17	19.77	2.17	8.00	3.17	4.65
0.33	4.74	1.33	112.66	2.33	7.06	3.33	4.38
0.50	5.41	1.50	23.70	2.50	6.35	3.50	4.15
0.67	6.37	1.67	14.86	2.67	5.79	3.67	3.94
0.83	7.88	1.83	11.31	2.83	5.34	3.83	3.75
1.00	10.75	2.00	9.31	3.00	4.97	4.00	3.59

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	Area (ha)=	0.24
STANDHYD ( 0204)	Total Imp(%)=	65.00
ID= 1 DT= 5.0 min	Dir. Conn.(%)=	36.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

CALIB	Area (ha)=	0.29	Curve Number (CN)=	76.5
NASHYD ( 0202)	Ia (mm)=	4.71	# of Linear Res.(N)=	3.00
ID= 1 DT= 5.0 min	U.H. Tp(hrs)=	0.30		

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

--- TRANSFORMED HYETOGRAPH ---

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.010 (i)  
 TIME TO PEAK (hrs)= 1.583  
 RUNOFF VOLUME (mm)= 15.927  
 TOTAL RAINFALL (mm)= 48.829  
 RUNOFF COEFFICIENT = 0.326

Max.Eff.Inten.(mm/hr)=	112.66	88.58
over (min)	5.00	5.00
Storage Coeff. (min)=	1.14 (ii)	4.26 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.23

PEAK FLOW (cms)=	0.03	0.02	0.048 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	46.83	22.39	31.18
TOTAL RAINFALL (mm)=	48.83	48.83	48.83
RUNOFF COEFFICIENT =	0.96	0.46	0.64

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)

- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0206) | Area (ha)= 0.18
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00
-----

```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.12	0.06
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	34.64	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

Max.Eff.Inten.(mm/hr)=	112.66	39.15
over (min)	5.00	5.00
Storage Coeff. (min)=	1.05 (ii)	3.56 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.26

```

*TOTALS*
PEAK FLOW (cms)= 0.03 0.01 0.041 (iii)
TIME TO PEAK (hrs)= 1.33 1.33 1.33
RUNOFF VOLUME (mm)= 46.83 16.50 34.69
TOTAL RAINFALL (mm)= 48.83 48.83 48.83
RUNOFF COEFFICIENT = 0.96 0.34 0.71

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0203) | Area (ha)= 0.08
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00
-----

```

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

Max.Eff.Inten.(mm/hr)=	112.66	103.35
over (min)	5.00	5.00
Storage Coeff. (min)=	0.82 (ii)	3.73 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.25

```

*TOTALS*
PEAK FLOW (cms)= 0.01 0.01 0.017 (iii)
TIME TO PEAK (hrs)= 1.33 1.33 1.33
RUNOFF VOLUME (mm)= 46.83 23.60 32.38
TOTAL RAINFALL (mm)= 48.83 48.83 48.83
RUNOFF COEFFICIENT = 0.96 0.48 0.66

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0205) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00
-----
| IMPERVIOUS | PERVIOUS (i) |
| Surface Area (ha)= 0.15 | 0.08 |
| Dep. Storage (mm)= 2.00 | 5.00 |
| Average Slope (%)= 2.00 | 1.00 |
| Length (m)= 39.16 | 8.00 |
| Mannings n = 0.013 | 0.250 |

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

```

Max.Eff.Inten.(mm/hr)= 112.66 82.01
over (min) 5.00 5.00
Storage Coeff. (min)= 1.13 (ii) 4.25 (ii)
Unit Hyd. Tpeak (min)= 5.00 5.00
Unit Hyd. peak (cms)= 0.34 0.24

```

```

*TOTALS*
0.046 (iii)
1.33
31.04
48.83

```

```

PEAK FLOW (cms)= 0.03 0.02
TIME TO PEAK (hrs)= 1.33 1.33
RUNOFF VOLUME (mm)= 46.83 21.79 31.04
TOTAL RAINFALL (mm)= 48.83 48.83 48.83

```

RUNOFF COEFFICIENT = 0.96 0.45 0.64

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
| (ha) (cms) (hrs) (mm) |
ID1= 1 ( 0203): 0.08 0.017 1.33 32.38
+ ID2= 2 ( 0204): 0.24 0.048 1.33 31.18
=====
ID = 3 ( 0904): 0.32 0.065 1.33 31.48

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 | AREA QPEAK TPEAK R.V.
| (ha) (cms) (hrs) (mm) |
ID1= 3 ( 0904): 0.32 0.065 1.33 31.48
+ ID2= 2 ( 0205): 0.23 0.046 1.33 31.04
=====
ID = 1 ( 0904): 0.55 0.110 1.33 31.30

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.
| (ha) (cms) (hrs) (mm) |
ID1= 1 ( 0904): 0.55 0.110 1.33 31.30
+ ID2= 2 ( 0206): 0.18 0.041 1.33 34.69
=====
ID = 3 ( 0904): 0.73 0.151 1.33 32.13

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) | Area (ha)= 0.23

```

|ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.07	0.16
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	0.50
Length	(m)=	39.16	100.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

Max.Eff.Inten.(mm/hr)=	112.66	24.16
over (min)	5.00	35.00
Storage Coeff. (min)=	1.13 (ii)	33.84 (ii)
Unit Hyd. Tpeak (min)=	5.00	35.00
Unit Hyd. peak (cms)=	0.34	0.03

			*TOTALS*
PEAK FLOW (cms)=	0.00	0.01	0.007 (iii)
TIME TO PEAK (hrs)=	1.33	1.83	1.83
RUNOFF VOLUME (mm)=	46.83	18.57	19.89
TOTAL RAINFALL (mm)=	48.83	48.83	48.83
RUNOFF COEFFICIENT =	0.96	0.38	0.41

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)				
1 + 2 = 3	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.010	1.58	15.93
+ ID2= 2 ( 0304):	0.23	0.007	1.83	19.89
ID = 3 ( 0906):	0.52	0.015	1.75	17.68

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)				
3 + 2 = 1	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.52	0.015	1.75	17.68
+ ID2= 2 ( 0904):	0.73	0.151	1.33	32.13
ID = 1 ( 0906):	1.25	0.160	1.33	26.12

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB			
STANDHYD ( 0201)	Area (ha)=	0.23	
ID= 1 DT= 5.0 min	Total Imp(%)=	38.00	Dir. Conn.(%)= 5.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.09	0.14
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	0.70
Length	(m)=	39.16	160.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38
0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94

0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

0.333	4.74	1.333	112.66	2.333	7.06	3.33	4.38
0.417	5.41	1.417	23.70	2.417	6.35	3.42	4.15
0.500	5.41	1.500	23.70	2.500	6.35	3.50	4.15
0.583	6.37	1.583	14.86	2.583	5.79	3.58	3.94
0.667	6.37	1.667	14.86	2.667	5.79	3.67	3.94
0.750	7.88	1.750	11.31	2.750	5.34	3.75	3.75
0.833	7.88	1.833	11.31	2.833	5.34	3.83	3.75
0.917	10.75	1.917	9.31	2.917	4.97	3.92	3.59
1.000	10.75	2.000	9.31	3.000	4.97	4.00	3.59

Max.Eff.Inten.(mm/hr)= 112.66 26.83  
over (min) 5.00 40.00  
Storage Coeff. (min)= 1.13 (ii) 38.73 (ii)  
Unit Hyd. Tpeak (min)= 5.00 40.00  
Unit Hyd. peak (cms)= 0.34 0.03

Max.Eff.Inten.(mm/hr)= 112.66 20.05  
over (min) 5.00 45.00  
Storage Coeff. (min)= 1.26 (ii) 43.51 (ii)  
Unit Hyd. Tpeak (min)= 5.00 45.00  
Unit Hyd. peak (cms)= 0.33 0.03

\*TOTALS\*  
PEAK FLOW (cms)= 0.00 0.01 0.007 (iii)  
TIME TO PEAK (hrs)= 1.33 1.92 1.92  
RUNOFF VOLUME (mm)= 46.83 20.00 21.25  
TOTAL RAINFALL (mm)= 48.83 48.83 48.83  
RUNOFF COEFFICIENT = 0.96 0.41 0.44

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.01 0.008 (iii)  
TIME TO PEAK (hrs)= 1.33 2.00 2.00  
RUNOFF VOLUME (mm)= 46.83 18.38 19.73  
TOTAL RAINFALL (mm)= 48.83 48.83 48.83  
RUNOFF COEFFICIENT = 0.96 0.38 0.40

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0303) | Area (ha)= 0.33  
| ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	4.25	1.083	19.77	2.083	8.00	3.08	4.65
0.167	4.25	1.167	19.77	2.167	8.00	3.17	4.65
0.250	4.74	1.250	112.66	2.250	7.06	3.25	4.38

-----  
| ADD HYD ( 0903) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)
ID1= 1 ( 0201): 0.23 0.007 1.92 21.25  
+ ID2= 2 ( 0303): 0.33 0.008 2.00 19.73  
=====

ID = 3 ( 0903):	0.56	0.014	2.00	20.35
-----------------	------	-------	------	-------

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
V V I SSSS U U A L (v 6.1.2001)  
V V I SS U U A A L  
-----

```

V V I SS U U AAAAA L
V V I SS U U A A L
W I SSSS UUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM
0 0 T T H H Y Y MM MM 0 0
0 0 T T H H Y M M 0 0
000 T T H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\57c  
 ca1c4-ccdf-4fba-8537-7144532611fd\sc  
 Summary filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\57c  
 ca1c4-ccdf-4fba-8537-7144532611fd\sc

DATE: 07/25/2023 TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (5) 25 Year Design Storm - Ch \*\*  
 \*\*\*\*\*

```

-----
| CHICAGO STORM | IDF curve parameters: A= 663.082
| Ptotal= 57.47 mm | B= 0.000
| | C= 0.699
-----
used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs
Storm time step = 10.00 min
Time to peak ratio = 0.35

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	5.00	1.17	23.27	2.17	9.41	3.17	5.48
0.33	5.58	1.33	132.61	2.33	8.31	3.33	5.16
0.50	6.37	1.50	27.90	2.50	7.48	3.50	4.88
0.67	7.49	1.67	17.49	2.67	6.82	3.67	4.64
0.83	9.27	1.83	13.31	2.83	6.29	3.83	4.42
1.00	12.65	2.00	10.95	3.00	5.85	4.00	4.23

```

-----
| CALIB |
| NASHYD ( 0202) | Area (ha)= 0.29 Curve Number (CN)= 76.5
| ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
|-----| U.H. Tp(hrs)= 0.30

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.014 (i)  
 TIME TO PEAK (hrs)= 1.583  
 RUNOFF VOLUME (mm)= 21.275  
 TOTAL RAINFALL (mm)= 57.473  
 RUNOFF COEFFICIENT = 0.370

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |

```

| STANDHYD ( 0204) | Area (ha)= 0.24  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)= 132.61 116.96  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 1.07 (ii) 3.99 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.24

\*TOTALS\*

PEAK FLOW (cms)= 0.03 0.03 0.059 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 55.47 28.94 38.48  
 TOTAL RAINFALL (mm)= 57.47 57.47 57.47  
 RUNOFF COEFFICIENT = 0.97 0.50 0.67

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0206) |  
 | ID= 1 DT= 5.0 min |

Area (ha)= 0.18  
 Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.12	0.06
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	34.64	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)= 132.61 53.57  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.98 (ii) 3.34 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.26

\*TOTALS\*

PEAK FLOW (cms)= 0.04 0.01 0.050 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 55.47 21.94 42.06  
 TOTAL RAINFALL (mm)= 57.47 57.47 57.47  
 RUNOFF COEFFICIENT = 0.97 0.38 0.73

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

THAN THE STORAGE COEFFICIENT.  
 (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0203) | Area (ha)= 0.08  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)=	132.61	135.60
over (min)	5.00	5.00
Storage Coeff. (min)=	0.77 (ii)	3.49 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.26

PEAK FLOW (cms)=	0.01	0.01	0.021 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	55.47	30.34	39.88
TOTAL RAINFALL (mm)=	57.47	57.47	57.47
RUNOFF COEFFICIENT =	0.97	0.53	0.69

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)  
 (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL

-----  
 | CALIB |  
 | STANDHYD ( 0205) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)=	132.61	108.64
over (min)	5.00	5.00
Storage Coeff. (min)=	1.06 (ii)	3.98 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.24

PEAK FLOW (cms)=	0.03	0.03	0.057 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	55.47	28.24	38.31
TOTAL RAINFALL (mm)=	57.47	57.47	57.47
RUNOFF COEFFICIENT =	0.97	0.49	0.67

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:



CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

Average Slope (%)= 2.00 0.50  
Length (m)= 39.16 100.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0203):  0.08  0.021  1.33  39.88
+ ID2= 2 ( 0204):  0.24  0.059  1.33  38.48
=====
ID = 3 ( 0904):  0.32  0.080  1.33  38.83

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 3 ( 0904):  0.32  0.080  1.33  38.83
+ ID2= 2 ( 0205):  0.23  0.057  1.33  38.31
=====
ID = 1 ( 0904):  0.55  0.137  1.33  38.62

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0904):  0.55  0.137  1.33  38.62
+ ID2= 2 ( 0206):  0.18  0.050  1.33  42.06
=====
ID = 3 ( 0904):  0.73  0.187  1.33  39.46

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB
| STANDHYD ( 0304) |
| ID= 1 DT= 5.0 min |
-----
Area (ha)= 0.23
Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

```

```

          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.07 0.16
Dep. Storage (mm)= 2.00 5.00

```

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)= 132.61 35.67  
over (min) 5.00 30.00  
Storage Coeff. (min)= 1.06 (ii) 29.05 (ii)  
Unit Hyd. Tpeak (min)= 5.00 30.00  
Unit Hyd. peak (cms)= 0.34 0.04

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.01 0.010 (iii)  
TIME TO PEAK (hrs)= 1.33 1.75 1.75  
RUNOFF VOLUME (mm)= 55.47 24.43 25.91  
TOTAL RAINFALL (mm)= 57.47 57.47 57.47  
RUNOFF COEFFICIENT = 0.97 0.43 0.45

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0906) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.

```

	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.014	1.58	21.27
+ ID2= 2 ( 0304):	0.23	0.010	1.75	25.91
=====				
ID = 3 ( 0906):	0.52	0.023	1.67	23.32

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)				
3 + 2 = 1				
	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 3 ( 0906):	0.52	0.023	1.67	23.32
+ ID2= 2 ( 0904):	0.73	0.187	1.33	39.46
=====				
ID = 1 ( 0906):	1.25	0.199	1.33	32.75

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB				
STANDHYD ( 0201)				
ID= 1 DT= 5.0 min				
Area (ha)=	0.23			
Total Imp(%)=	38.00	Dir. Conn.(%)=	5.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64
0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)=	132.61	38.54
over (min)	5.00	35.00
Storage Coeff. (min)=	1.06 (ii)	33.59 (ii)
Unit Hyd. Tpeak (min)=	5.00	35.00
Unit Hyd. peak (cms)=	0.34	0.03

\*TOTALS\*

PEAK FLOW (cms)=	0.00	0.01	0.010 (iii)
TIME TO PEAK (hrs)=	1.33	1.83	1.83
RUNOFF VOLUME (mm)=	55.47	26.13	27.52
TOTAL RAINFALL (mm)=	57.47	57.47	57.47
RUNOFF COEFFICIENT =	0.97	0.45	0.48

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20% YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:

CN\* = 74.0 Ia = Dep. Storage (Above)

(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.

(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB				
STANDHYD ( 0303)				
ID= 1 DT= 5.0 min				
Area (ha)=	0.33			
Total Imp(%)=	30.00	Dir. Conn.(%)=	5.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.00	1.083	23.27	2.083	9.41	3.08	5.48
0.167	5.00	1.167	23.27	2.167	9.41	3.17	5.48
0.250	5.58	1.250	132.61	2.250	8.31	3.25	5.16
0.333	5.58	1.333	132.61	2.333	8.31	3.33	5.16
0.417	6.37	1.417	27.90	2.417	7.48	3.42	4.88
0.500	6.37	1.500	27.90	2.500	7.48	3.50	4.88
0.583	7.49	1.583	17.49	2.583	6.82	3.58	4.64
0.667	7.49	1.667	17.49	2.667	6.82	3.67	4.64

0.750	9.27	1.750	13.31	2.750	6.29	3.75	4.42
0.833	9.27	1.833	13.31	2.833	6.29	3.83	4.42
0.917	12.65	1.917	10.95	2.917	5.85	3.92	4.23
1.000	12.65	2.000	10.95	3.000	5.85	4.00	4.23

Max.Eff.Inten.(mm/hr)= 132.61 28.82  
over (min) 5.00 40.00  
Storage Coeff. (min)= 1.18 (ii) 37.72 (ii)  
Unit Hyd. Tpeak (min)= 5.00 40.00  
Unit Hyd. peak (cms)= 0.33 0.03

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.01 0.012 (iii)  
TIME TO PEAK (hrs)= 1.33 1.92 1.92  
RUNOFF VOLUME (mm)= 55.47 24.20 25.70  
TOTAL RAINFALL (mm)= 57.47 57.47 57.47  
RUNOFF COEFFICIENT = 0.97 0.42 0.45

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0201):	0.23	0.010	1.83	27.52
+ ID2= 2 ( 0303):	0.33	0.012	1.92	25.70
=====				
ID = 3 ( 0903):	0.56	0.021	1.92	26.45

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U AAAAA L
V V I SS U U A A L
WV I SSSS UUUU A A LLLLL
000 TTTT TTTT H H Y Y M M 000 TM

```

```

O O T T H H Y Y M M O O
O O T T H H Y M M O O
000 T T H H Y M M 000
Developed and Distributed by Smart City Water Inc
Copyright 2007 - 2020 Smart City Water Inc
All rights reserved.

```

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\8b0ea29-07d5-4ff8-ae97-641376479dd7\sc  
Summary filename:  
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\8b0ea29-07d5-4ff8-ae97-641376479dd7\sc

DATE: 07/25/2023

TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
\*\* SIMULATION : (6) 50 Year Design Storm - Ch \*\*  
\*\*\*\*\*

CHICAGO STORM	IDF curve parameters: A= 738.312
Ptotal= 63.99 mm	B= 0.000
	C= 0.699

used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
Storm time step = 10.00 min  
Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	5.56	1.17	25.91	2.17	10.48	3.17	6.10
0.33	6.22	1.33	147.65	2.33	9.25	3.33	5.74

0.50	7.09	1.50	31.06	2.50	8.32	3.50	5.43
0.67	8.34	1.67	19.47	2.67	7.59	3.67	5.16
0.83	10.32	1.83	14.82	2.83	7.00	3.83	4.92
1.00	14.09	2.00	12.20	3.00	6.51	4.00	4.71

Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 40.00 8.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

-----  
| CALIB |  
| NASHYD ( 0202) | Area (ha)= 0.29 Curve Number (CN)= 76.5  
| ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00  
|-----| U.H. Tp(hrs)= 0.30

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.017 (i)  
TIME TO PEAK (hrs)= 1.583  
RUNOFF VOLUME (mm)= 25.583  
TOTAL RAINFALL (mm)= 63.993  
RUNOFF COEFFICIENT = 0.400

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0204) | Area (ha)= 0.24  
| ID= 1 DT= 5.0 min | Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

IMPERVIOUS PVIOUS (i)  
Surface Area (ha)= 0.16 0.08

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max. Eff. Inten. (mm/hr)= 147.65 139.59  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.02 (ii) 3.82 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*

PEAK FLOW (cms)= 0.04 0.03 0.069 (iii)  
TIME TO PEAK (hrs)= 1.33 1.33 1.33  
RUNOFF VOLUME (mm)= 61.99 34.09 44.13  
TOTAL RAINFALL (mm)= 63.99 63.99 63.99  
RUNOFF COEFFICIENT = 0.97 0.53 0.69

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0206) | Area (ha)= 0.18  
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.12	0.06
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	34.64	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)=	147.65	65.36
over (min)	5.00	5.00
Storage Coeff. (min)=	0.94 (ii)	3.20 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.27

			*TOTALS*
PEAK FLOW (cms)=	0.04	0.01	0.056 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	61.99	26.32	47.72
TOTAL RAINFALL (mm)=	63.99	63.99	63.99
RUNOFF COEFFICIENT =	0.97	0.41	0.75

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0203) | Area (ha)= 0.08

|ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.06	0.02
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	23.09	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)=	147.65	161.20
over (min)	5.00	5.00
Storage Coeff. (min)=	0.74 (ii)	3.35 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.26

			*TOTALS*
PEAK FLOW (cms)=	0.01	0.01	0.024 (iii)
TIME TO PEAK (hrs)=	1.33	1.33	1.33
RUNOFF VOLUME (mm)=	61.99	35.64	45.64
TOTAL RAINFALL (mm)=	63.99	63.99	63.99
RUNOFF COEFFICIENT =	0.97	0.56	0.71

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0203) |

CALIB  
 STANDHYD ( 0205) | Area (ha)= 0.23  
 ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.15	0.08
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	39.16	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)=	147.65	129.93
over (min)	5.00	5.00
Storage Coeff. (min)=	1.01 (ii)	3.81 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.25

\*TOTALS\*  
 PEAK FLOW (cms)= 0.03 0.03 0.065 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 61.99 33.33 43.93  
 TOTAL RAINFALL (mm)= 63.99 63.99 63.99  
 RUNOFF COEFFICIENT = 0.97 0.52 0.69

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 ADD HYD ( 0904) |  
 | 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
 | (ha) (cms) (hrs) (mm)  
 ID1= 1 ( 0203): 0.08 0.024 1.33 45.64  
 + ID2= 2 ( 0204): 0.24 0.069 1.33 44.13  
 =====  
 ID = 3 ( 0904): 0.32 0.093 1.33 44.51

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 ADD HYD ( 0904) |  
 | 3 + 2 = 1 | AREA QPEAK TPEAK R.V.  
 | (ha) (cms) (hrs) (mm)  
 ID1= 3 ( 0904): 0.32 0.093 1.33 44.51  
 + ID2= 2 ( 0205): 0.23 0.065 1.33 43.93  
 =====  
 ID = 1 ( 0904): 0.55 0.158 1.33 44.27

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 ADD HYD ( 0904) |  
 | 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
 | (ha) (cms) (hrs) (mm)  
 ID1= 1 ( 0904): 0.55 0.158 1.33 44.27  
 + ID2= 2 ( 0206): 0.18 0.056 1.33 47.72  
 =====  
 ID = 3 ( 0904): 0.73 0.215 1.33 45.12

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB  
 STANDHYD ( 0304) | Area (ha)= 0.23  
 ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.07	0.16
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	0.50
Length	(m)=	39.16	100.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)= 147.65      48.02  
over (min) = 5.00      30.00  
Storage Coeff. (min)= 1.01 (ii)    25.87 (ii)  
Unit Hyd. Tpeak (min)= 5.00      30.00  
Unit Hyd. peak (cms)= 0.34      0.04

\*TOTALS\*  
0.01 (iii)  
1.75  
30.69  
63.99  
0.48

PEAK FLOW (cms)= 0.00      0.01  
TIME TO PEAK (hrs)= 1.33      1.75  
RUNOFF VOLUME (mm)= 61.99    29.11    30.69  
TOTAL RAINFALL (mm)= 63.99    63.99    63.99  
RUNOFF COEFFICIENT = 0.97      0.45

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0    Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.017	1.58	25.58
+ ID2= 2 ( 0304):	0.23	0.013	1.75	30.69
=====				
ID = 3 ( 0906):	0.52	0.028	1.67	27.84

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
3 + 2 = 1	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.52	0.028	1.67	27.84
+ ID2= 2 ( 0904):	0.73	0.215	1.33	45.12
=====				
ID = 1 ( 0906):	1.25	0.230	1.33	37.93

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----

CALIB	Area	(ha)=	0.23
STANDHYD ( 0201)	Total Imp(%)=	38.00	Dir. Conn.(%)= 5.00
ID= 1 DT= 5.0 min			

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)= 147.65      51.12  
over (min) = 5.00      35.00  
Storage Coeff. (min)= 1.01 (ii)    30.07 (ii)  
Unit Hyd. Tpeak (min)= 5.00      35.00

Unit Hyd. peak (cms)= 0.34 0.04

PEAK FLOW (cms)= 0.00 0.01

TIME TO PEAK (hrs)= 1.33 1.83

RUNOFF VOLUME (mm)= 61.99 31.00

TOTAL RAINFALL (mm)= 63.99 63.99

RUNOFF COEFFICIENT = 0.97 0.48

\*TOTALS\*

0.012 (iii)

1.83

32.48

63.99

0.51

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20% YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----

CALIB	Area (ha)= 0.33
STANDHYD ( 0303)	Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00
ID= 1 DT= 5.0 min	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	5.56	1.083	25.91	2.083	10.48	3.08	6.10
0.167	5.56	1.167	25.91	2.167	10.48	3.17	6.10
0.250	6.22	1.250	147.65	2.250	9.25	3.25	5.74
0.333	6.22	1.333	147.65	2.333	9.25	3.33	5.74
0.417	7.09	1.417	31.06	2.417	8.32	3.42	5.43
0.500	7.09	1.500	31.06	2.500	8.32	3.50	5.43
0.583	8.34	1.583	19.47	2.583	7.59	3.58	5.16
0.667	8.34	1.667	19.47	2.667	7.59	3.67	5.16
0.750	10.32	1.750	14.82	2.750	7.00	3.75	4.92
0.833	10.32	1.833	14.82	2.833	7.00	3.83	4.92
0.917	14.09	1.917	12.20	2.917	6.51	3.92	4.71
1.000	14.09	2.000	12.20	3.000	6.51	4.00	4.71

Max.Eff.Inten.(mm/hr)= 147.65 37.65

over (min) 5.00 35.00

Storage Coeff. (min)= 1.13 (ii) 33.96 (ii)

Unit Hyd. Tpeak (min)= 5.00 35.00

Unit Hyd. peak (cms)= 0.34 0.03

PEAK FLOW (cms)= 0.01 0.01

TIME TO PEAK (hrs)= 1.33 1.83

RUNOFF VOLUME (mm)= 61.99 28.85

TOTAL RAINFALL (mm)= 63.99 63.99

RUNOFF COEFFICIENT = 0.97 0.45

\*TOTALS\*

0.015 (iii)

1.83

30.45

63.99

0.48

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20% YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----

ADD HYD ( 0903)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0201):	0.23	0.012	1.83	32.48
+ ID2= 2 ( 0303):	0.33	0.015	1.83	30.45
ID = 3 ( 0903):	0.56	0.027	1.83	31.29

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----

```

V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSS UUUU A A LLLL

000 TTTTT TTTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000

```

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2020 Smart City Water Inc



All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voim.dat

Output filename:

C:\Users\JBirchard\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\1195d7bc-acaa-4e99-aa64-42996d55ac10\sc

Summary filename:

C:\Users\JBirchard\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\1195d7bc-acaa-4e99-aa64-42996d55ac10\sc

DATE: 07/25/2023

TIME: 09:00:16

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (7) 100 Year Design Storm - C \*\*  
 \*\*\*\*\*

-----  
 CHICAGO STORM | IDF curve parameters: A= 811.794  
 Ptotal= 70.36 mm | B= 0.000  
 C= 0.699  
 used in: INTENSITY = A / (t + B)^C

Duration of storm = 4.00 hrs  
 Storm time step = 10.00 min  
 Time to peak ratio = 0.35

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.17	6.12	1.17	28.48	2.17	11.52	3.17	6.70
0.33	6.83	1.33	162.35	2.33	10.17	3.33	6.31
0.50	7.80	1.50	34.15	2.50	9.15	3.50	5.97
0.67	9.17	1.67	21.41	2.67	8.35	3.67	5.68
0.83	11.35	1.83	16.30	2.83	7.70	3.83	5.41
1.00	15.49	2.00	13.41	3.00	7.16	4.00	5.17

-----  
 CALIB  
 NASHYD ( 0202) | Area (ha)= 0.29 Curve Number (CN)= 76.5  
 ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00  
 U.H. Tp(hrs)= 0.30  
 -----

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	6.12	1.083	28.48	2.083	11.52	3.08	6.70
0.167	6.12	1.167	28.48	2.167	11.52	3.17	6.70
0.250	6.83	1.250	162.35	2.250	10.17	3.25	6.31
0.333	6.83	1.333	162.35	2.333	10.17	3.33	6.31
0.417	7.80	1.417	34.15	2.417	9.15	3.42	5.97
0.500	7.80	1.500	34.15	2.500	9.15	3.50	5.97
0.583	9.17	1.583	21.41	2.583	8.35	3.58	5.68
0.667	9.17	1.667	21.41	2.667	8.35	3.67	5.68
0.750	11.35	1.750	16.30	2.750	7.70	3.75	5.41
0.833	11.35	1.833	16.30	2.833	7.70	3.83	5.41
0.917	15.49	1.917	13.41	2.917	7.16	3.92	5.17
1.000	15.49	2.000	13.41	3.000	7.16	4.00	5.17

Unit Hyd Qpeak (cms)= 0.037

PEAK FLOW (cms)= 0.020 (i)  
 TIME TO PEAK (hrs)= 1.583  
 RUNOFF VOLUME (mm)= 29.985  
 TOTAL RAINFALL (mm)= 70.362  
 RUNOFF COEFFICIENT = 0.426

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 CALIB  
 STANDHYD ( 0204) | Area (ha)= 0.24  
 ID= 1 DT= 5.0 min | Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	6.12	1.083	28.48	2.083	11.52	3.08	6.70
0.167	6.12	1.167	28.48	2.167	11.52	3.17	6.70
0.250	6.83	1.250	162.35	2.250	10.17	3.25	6.31
0.333	6.83	1.333	162.35	2.333	10.17	3.33	6.31
0.417	7.80	1.417	34.15	2.417	9.15	3.42	5.97
0.500	7.80	1.500	34.15	2.500	9.15	3.50	5.97
0.583	9.17	1.583	21.41	2.583	8.35	3.58	5.68
0.667	9.17	1.667	21.41	2.667	8.35	3.67	5.68
0.750	11.35	1.750	16.30	2.750	7.70	3.75	5.41
0.833	11.35	1.833	16.30	2.833	7.70	3.83	5.41
0.917	15.49	1.917	13.41	2.917	7.16	3.92	5.17
1.000	15.49	2.000	13.41	3.000	7.16	4.00	5.17

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	6.12	1.083	28.48	2.083	11.52	3.08	6.70
0.167	6.12	1.167	28.48	2.167	11.52	3.17	6.70
0.250	6.83	1.250	162.35	2.250	10.17	3.25	6.31
0.333	6.83	1.333	162.35	2.333	10.17	3.33	6.31
0.417	7.80	1.417	34.15	2.417	9.15	3.42	5.97
0.500	7.80	1.500	34.15	2.500	9.15	3.50	5.97
0.583	9.17	1.583	21.41	2.583	8.35	3.58	5.68
0.667	9.17	1.667	21.41	2.667	8.35	3.67	5.68
0.750	11.35	1.750	16.30	2.750	7.70	3.75	5.41
0.833	11.35	1.833	16.30	2.833	7.70	3.83	5.41
0.917	15.49	1.917	13.41	2.917	7.16	3.92	5.17
1.000	15.49	2.000	13.41	3.000	7.16	4.00	5.17

Max.Eff.Inten.(mm/hr)= 162.35 162.55  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.99 (ii) 3.68 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.25

Max.Eff.Inten.(mm/hr)= 162.35 77.53  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.90 (ii) 3.08 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.27

\*TOTALS\*  
 PEAK FLOW (cms)= 0.04 0.04 0.078 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 68.36 39.28 49.74  
 TOTAL RAINFALL (mm)= 70.36 70.36 70.36  
 RUNOFF COEFFICIENT = 0.97 0.56 0.71

\*TOTALS\*  
 PEAK FLOW (cms)= 0.05 0.01 0.063 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 68.36 30.79 53.33  
 TOTAL RAINFALL (mm)= 70.36 70.36 70.36  
 RUNOFF COEFFICIENT = 0.97 0.44 0.76

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 CALIB  
 STANDHYD ( 0206) | Area (ha)= 0.18  
 ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.12	0.06
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	34.64	8.00

-----  
 CALIB  
 STANDHYD ( 0203) | Area (ha)= 0.08  
 ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00

Average Slope (%)= 2.00 1.00  
 Length (m)= 23.09 8.00  
 Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

Surface Area (ha)= 0.15 0.08  
 Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 1.00  
 Length (m)= 39.16 8.00  
 Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	6.12	1.083	28.48	2.083	11.52	3.08	6.70
0.167	6.12	1.167	28.48	2.167	11.52	3.17	6.70
0.250	6.83	1.250	162.35	2.250	10.17	3.25	6.31
0.333	6.83	1.333	162.35	2.333	10.17	3.33	6.31
0.417	7.80	1.417	34.15	2.417	9.15	3.42	5.97
0.500	7.80	1.500	34.15	2.500	9.15	3.50	5.97
0.583	9.17	1.583	21.41	2.583	8.35	3.58	5.68
0.667	9.17	1.667	21.41	2.667	8.35	3.67	5.68
0.750	11.35	1.750	16.30	2.750	7.70	3.75	5.41
0.833	11.35	1.833	16.30	2.833	7.70	3.83	5.41
0.917	15.49	1.917	13.41	2.917	7.16	3.92	5.17
1.000	15.49	2.000	13.41	3.000	7.16	4.00	5.17

Max.Eff.Inten.(mm/hr)= 162.35 187.06  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.71 (ii) 3.22 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.27

PEAK FLOW (cms)= 0.01 0.01 0.027 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 68.36 40.94 51.35  
 TOTAL RAINFALL (mm)= 70.36 70.36 70.36  
 RUNOFF COEFFICIENT = 0.97 0.58 0.73

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0205) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
 -----

IMPERVIOUS PERVIOUS (i)

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	6.12	1.083	28.48	2.083	11.52	3.08	6.70
0.167	6.12	1.167	28.48	2.167	11.52	3.17	6.70
0.250	6.83	1.250	162.35	2.250	10.17	3.25	6.31
0.333	6.83	1.333	162.35	2.333	10.17	3.33	6.31
0.417	7.80	1.417	34.15	2.417	9.15	3.42	5.97
0.500	7.80	1.500	34.15	2.500	9.15	3.50	5.97
0.583	9.17	1.583	21.41	2.583	8.35	3.58	5.68
0.667	9.17	1.667	21.41	2.667	8.35	3.67	5.68
0.750	11.35	1.750	16.30	2.750	7.70	3.75	5.41
0.833	11.35	1.833	16.30	2.833	7.70	3.83	5.41
0.917	15.49	1.917	13.41	2.917	7.16	3.92	5.17
1.000	15.49	2.000	13.41	3.000	7.16	4.00	5.17

Max.Eff.Inten.(mm/hr)= 162.35 151.56  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.97 (ii) 3.67 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.25

PEAK FLOW (cms)= 0.04 0.04 0.074 (iii)  
 TIME TO PEAK (hrs)= 1.33 1.33 1.33  
 RUNOFF VOLUME (mm)= 68.36 38.45 49.52  
 TOTAL RAINFALL (mm)= 70.36 70.36 70.36  
 RUNOFF COEFFICIENT = 0.97 0.55 0.70

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | ADD HYD ( 0904) |  
 | 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
 -----

```

-----
              (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0203):  0.08  0.027  1.33   51.35
+ ID2= 2 ( 0204):  0.24  0.078  1.33   49.74
=====
ID = 3 ( 0904):  0.32  0.105  1.33   50.15

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 |
              AREA   QPEAK   TPEAK   R.V.
              (ha)   (cms)   (hrs)   (mm)
ID1= 3 ( 0904):  0.32  0.105  1.33   50.15
+ ID2= 2 ( 0205):  0.23  0.074  1.33   49.52
=====
ID = 1 ( 0904):  0.55  0.179  1.33   49.88

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
              AREA   QPEAK   TPEAK   R.V.
              (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0904):  0.55  0.179  1.33   49.88
+ ID2= 2 ( 0206):  0.18  0.063  1.33   53.33
=====
ID = 3 ( 0904):  0.73  0.242  1.33   50.73

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

```

```

              IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.07 0.16
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.50
Length (m)= 39.16 100.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
      ---- TRANSFORMED HYETOGRAPH ----
TIME   RAIN | TIME   RAIN | TIME   RAIN | TIME   RAIN
hrs  mm/hr | hrs  mm/hr | hrs  mm/hr | hrs  mm/hr

```

```

0.083  6.12 | 1.083  28.48 | 2.083  11.52 | 3.08  6.70
0.167  6.12 | 1.167  28.48 | 2.167  11.52 | 3.17  6.70
0.250  6.83 | 1.250 162.35 | 2.250  10.17 | 3.25  6.31
0.333  6.83 | 1.333 162.35 | 2.333  10.17 | 3.33  6.31
0.417  7.80 | 1.417  34.15 | 2.417  9.15  | 3.42  5.97
0.500  7.80 | 1.500  34.15 | 2.500  9.15  | 3.50  5.97
0.583  9.17 | 1.583  21.41 | 2.583  8.35  | 3.58  5.68
0.667  9.17 | 1.667  21.41 | 2.667  8.35  | 3.67  5.68
0.750 11.35 | 1.750  16.30 | 2.750  7.70  | 3.75  5.41
0.833 11.35 | 1.833  16.30 | 2.833  7.70  | 3.83  5.41
0.917 15.49 | 1.917  13.41 | 2.917  7.16  | 3.92  5.17
1.000 15.49 | 2.000  13.41 | 3.000  7.16  | 4.00  5.17

```

```

Max.Eff.Inten.(mm/hr)= 162.35 56.27
over (min) = 5.00 25.00
Storage Coeff. (min)= 0.97 (ii) 24.31 (ii)
Unit Hyd. Tpeak (min)= 5.00 25.00
Unit Hyd. peak (cms)= 0.34 0.05

```

\*TOTALS\*

```

PEAK FLOW (cms)= 0.01 0.02 0.016 (iii)
TIME TO PEAK (hrs)= 1.33 1.67 1.67
RUNOFF VOLUME (mm)= 68.36 33.85 35.52
TOTAL RAINFALL (mm)= 70.36 70.36 70.36
RUNOFF COEFFICIENT = 0.97 0.48 0.50

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0906) |
| 1 + 2 = 3 |
              AREA   QPEAK   TPEAK   R.V.
              (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0202):  0.29  0.020  1.58  29.99
+ ID2= 2 ( 0304):  0.23  0.016  1.67  35.52
=====
ID = 3 ( 0906):  0.52  0.035  1.67  32.43

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

| ADD HYD ( 0906) |
| 3 + 2 = 1 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
ID1= 3 ( 0906):  0.52  0.035  1.67  32.43
+ ID2= 2 ( 0904):  0.73  0.242  1.33  50.73
=====
ID = 1 ( 0906):  1.25  0.261  1.33  43.12

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0201) |
| ID= 1 DT= 5.0 min |
-----
      Area (ha)= 0.23
      Total Imp(%)= 38.00  Dir. Conn.(%)= 5.00

```

```

      IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.09 0.14
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.70
Length (m)= 39.16 160.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
      ---- TRANSFORMED HYETOGRAPH ----
      TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
      hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 6.12 | 1.083 28.48 | 2.083 11.52 | 3.08 6.70
0.167 6.12 | 1.167 28.48 | 2.167 11.52 | 3.17 6.70
0.250 6.83 | 1.250 162.35 | 2.250 10.17 | 3.25 6.31
0.333 6.83 | 1.333 162.35 | 2.333 10.17 | 3.33 6.31
0.417 7.80 | 1.417 34.15 | 2.417 9.15 | 3.42 5.97
0.500 7.80 | 1.500 34.15 | 2.500 9.15 | 3.50 5.97
0.583 9.17 | 1.583 21.41 | 2.583 8.35 | 3.58 5.68
0.667 9.17 | 1.667 21.41 | 2.667 8.35 | 3.67 5.68
0.750 11.35 | 1.750 16.30 | 2.750 7.70 | 3.75 5.41
0.833 11.35 | 1.833 16.30 | 2.833 7.70 | 3.83 5.41
0.917 15.49 | 1.917 13.41 | 2.917 7.16 | 3.92 5.17
1.000 15.49 | 2.000 13.41 | 3.000 7.16 | 4.00 5.17

```

```

Max.Eff.Inten.(mm/hr)= 162.35 59.58
over (min) 5.00 30.00
Storage Coeff. (min)= 0.97 (ii) 28.30 (ii)
Unit Hyd. Tpeak (min)= 5.00 30.00
Unit Hyd. peak (cms)= 0.34 0.04

```

```

PEAK FLOW (cms)= 0.01 0.01 0.015 (iii)
TIME TO PEAK (hrs)= 1.33 1.75 1.75
RUNOFF VOLUME (mm)= 68.36 35.92 37.47

```

```

TOTAL RAINFALL (mm)= 70.36 70.36 70.36
RUNOFF COEFFICIENT = 0.97 0.51 0.53

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0303) |
| ID= 1 DT= 5.0 min |
-----
      Area (ha)= 0.33
      Total Imp(%)= 30.00  Dir. Conn.(%)= 5.00

```

```

      IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.10 0.23
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.70
Length (m)= 46.90 160.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

-----
      ---- TRANSFORMED HYETOGRAPH ----
      TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
      hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 6.12 | 1.083 28.48 | 2.083 11.52 | 3.08 6.70
0.167 6.12 | 1.167 28.48 | 2.167 11.52 | 3.17 6.70
0.250 6.83 | 1.250 162.35 | 2.250 10.17 | 3.25 6.31
0.333 6.83 | 1.333 162.35 | 2.333 10.17 | 3.33 6.31
0.417 7.80 | 1.417 34.15 | 2.417 9.15 | 3.42 5.97
0.500 7.80 | 1.500 34.15 | 2.500 9.15 | 3.50 5.97
0.583 9.17 | 1.583 21.41 | 2.583 8.35 | 3.58 5.68
0.667 9.17 | 1.667 21.41 | 2.667 8.35 | 3.67 5.68
0.750 11.35 | 1.750 16.30 | 2.750 7.70 | 3.75 5.41
0.833 11.35 | 1.833 16.30 | 2.833 7.70 | 3.83 5.41
0.917 15.49 | 1.917 13.41 | 2.917 7.16 | 3.92 5.17
1.000 15.49 | 2.000 13.41 | 3.000 7.16 | 4.00 5.17

```

```

Max.Eff.Inten.(mm/hr)= 162.35 48.95
over (min) 5.00 35.00
Storage Coeff. (min)= 1.09 (ii) 30.65 (ii)
Unit Hyd. Tpeak (min)= 5.00 35.00
Unit Hyd. peak (cms)= 0.34 0.04

```

```

*TOTALS*
PEAK FLOW      (cms)=      0.01      0.02      0.019 (iii)
TIME TO PEAK   (hrs)=      1.33      1.83      1.83
RUNOFF VOLUME  (mm)=      68.36     33.57     35.26
TOTAL RAINFALL (mm)=      70.36     70.36     70.36
RUNOFF COEFFICIENT =      0.97      0.48      0.50

```

```

***** WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!
***** WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%
        YOU SHOULD CONSIDER SPLITTING THE AREA.

```

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0903) |
| 1 + 2 = 3 |
-----
      AREA   QPEAK   TPEAK   R.V.
      (ha)   (cms)   (hrs)   (mm)
-----
      ID1= 1 ( 0201):  0.23  0.015  1.75  37.47
+ ID2= 2 ( 0303):  0.33  0.019  1.83  35.26
-----
      ID = 3 ( 0903):  0.56  0.033  1.83  36.17
-----

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

V V I SSSSS U U A A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSSS UUUUU A A LLLLL

```

```

000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y Y M M O O
000 T T H H Y Y M M 000

```

Developed and Distributed by Smart City Water Inc  
Copyright 2007 - 2020 Smart City Water Inc  
All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

```

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat
Output filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\5de
6679f-3b8b-4a52-8420-01fbfa132d6f\sc
Summary filename:
C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\5de
6679f-3b8b-4a52-8420-01fbfa132d6f\sc

```

```

DATE: 07/25/2023          TIME: 09:00:16
USER:

```

COMMENTS: \_\_\_\_\_

```

*****
** SIMULATION : (8) Timmins Design Storm **
*****

```

```

-----
| READ STORM | Filename: C:\Users\JBirchard\AppData
|            |   ata\Local\Temp\
|            |   3eb8d076-4e62-4c3a-b26f-53c9bf58a78b\3c4d485d
| Ptotal=193.00 mm | Comments: TIMMINS
-----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	15.00	3.25	3.00	6.25	43.00	9.25	13.00
0.50	15.00	3.50	3.00	6.50	43.00	9.50	13.00
0.75	15.00	3.75	3.00	6.75	43.00	9.75	13.00
1.00	15.00	4.00	3.00	7.00	43.00	10.00	13.00
1.25	20.00	4.25	5.00	7.25	20.00	10.25	13.00
1.50	20.00	4.50	5.00	7.50	20.00	10.50	13.00
1.75	20.00	4.75	5.00	7.75	20.00	10.75	13.00
2.00	20.00	5.00	5.00	8.00	20.00	11.00	13.00
2.25	10.00	5.25	20.00	8.25	23.00	11.25	8.00
2.50	10.00	5.50	20.00	8.50	23.00	11.50	8.00
2.75	10.00	5.75	20.00	8.75	23.00	11.75	8.00
3.00	10.00	6.00	20.00	9.00	23.00	12.00	8.00

-----

```

-----
| CALIB
| NASHYD ( 0202)
| ID= 1 DT= 5.0 min
-----

```

```

Area (ha)= 0.29 Curve Number (CN)= 76.5
Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
U.H. Tp(hrs)= 0.30

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

Unit Hyd Qpeak (cms)= 0.037

```

PEAK FLOW (cms)= 0.027 (i)
TIME TO PEAK (hrs)= 7.000
RUNOFF VOLUME (mm)= 133.070
TOTAL RAINFALL (mm)= 193.000
RUNOFF COEFFICIENT = 0.689

```

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB
| STANDHYD ( 0204)
| ID= 1 DT= 5.0 min
-----

```

```

Area (ha)= 0.24
Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

```

```

----- IMPERVIOUS PERVIOUS (i) -----
Surface Area (ha)= 0.16 0.08
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 1.00
Length (m)= 40.00 8.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00

1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

Max.Eff.Inten.(mm/hr)= 43.00 71.17  
over (min) 5.00 10.00  
Storage Coeff. (min)= 1.68 (ii) 6.26 (ii)  
Unit Hyd. Tpeak (min)= 5.00 10.00  
Unit Hyd. peak (cms)= 0.32 0.15

\*TOTALS\*  
0.027 (iii)  
7.00  
165.66  
193.00  
0.86

PEAK FLOW (cms)= 0.01 0.02  
TIME TO PEAK (hrs)= 6.50 7.00  
RUNOFF VOLUME (mm)= 191.00 151.42  
TOTAL RAINFALL (mm)= 193.00 193.00  
RUNOFF COEFFICIENT = 0.99 0.78

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	
STANDHYD ( 0206)	Area (ha)= 0.18
ID= 1 DT= 5.0 min	Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.12 0.06  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 34.64 8.00  
Mannings n = 0.013 0.250

Max.Eff.Inten.(mm/hr)= 43.00 41.99  
over (min) 5.00 10.00  
Storage Coeff. (min)= 1.54 (ii) 5.23 (ii)  
Unit Hyd. Tpeak (min)= 5.00 10.00  
Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.01 0.020 (iii)  
TIME TO PEAK (hrs)= 6.50 7.00 7.00  
RUNOFF VOLUME (mm)= 191.00 134.64 168.44

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.



TOTAL RAINFALL (mm)= 193.00 193.00 193.00  
 RUNOFF COEFFICIENT = 0.99 0.70 0.87

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0203) | Area (ha)= 0.08  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00  
 -----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.06	0.02
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	23.09	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00

1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

Max. Eff. Inten. (mm/hr)= 43.00 78.83  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.21 (ii) 5.48 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.01 0.009 (iii)  
 TIME TO PEAK (hrs)= 6.50 7.00 7.00  
 RUNOFF VOLUME (mm)= 191.00 154.35 168.24  
 TOTAL RAINFALL (mm)= 193.00 193.00 193.00  
 RUNOFF COEFFICIENT = 0.99 0.80 0.87

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0205) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
 -----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.15	0.08
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	39.16	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

Max.Eff.Inten.(mm/hr)= 43.00 67.65  
 over (min) 5.00 10.00  
 Storage Coeff. (min)= 1.66 (ii) 6.24 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 10.00  
 Unit Hyd. peak (cms)= 0.32 0.15

\*TOTALS\*  
 0.026 (iii)

PEAK FLOW (cms)= 0.01 0.02

TIME TO PEAK (hrs)= 6.50 7.00 7.00  
 RUNOFF VOLUME (mm)= 191.00 149.93 165.10  
 TOTAL RAINFALL (mm)= 193.00 193.00 193.00  
 RUNOFF COEFFICIENT = 0.99 0.78 0.86

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 | ADD HYD ( 0904) |  
1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0203):	0.08	0.009	7.00	168.24
+ ID2= 2 ( 0204):	0.24	0.027	7.00	165.66
=====				
ID = 3 ( 0904):	0.32	0.036	7.00	166.31

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | ADD HYD ( 0904) |  
3 + 2 = 1

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 3 ( 0904):	0.32	0.036	7.00	166.31
+ ID2= 2 ( 0205):	0.23	0.026	7.00	165.10
=====				
ID = 1 ( 0904):	0.55	0.062	7.00	165.80

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | ADD HYD ( 0904) |  
1 + 2 = 3

	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
ID1= 1 ( 0904):	0.55	0.062	7.00	165.80
+ ID2= 2 ( 0206):	0.18	0.020	7.00	168.44
=====				
ID = 3 ( 0904):	0.73	0.082	7.00	166.45

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) |
| ID= 1 DT= 5.0 min |
-----

```

```

Area (ha)= 0.23
Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00

```

2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

```

IMPERVIOUS PERVIOUS (i)
Surface Area (ha)= 0.07 0.16
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.50
Length (m)= 39.16 100.00
Mannings n = 0.013 0.250

```

```

Max.Eff.Inten.(mm/hr)= 43.00 50.39
over (min) 5.00 30.00
Storage Coeff. (min)= 1.66 (ii) 26.04 (ii)
Unit Hyd. Tpeak (min)= 5.00 30.00
Unit Hyd. peak (cms)= 0.32 0.04

```

\*TOTALS\*

```

PEAK FLOW (cms)= 0.00 0.02 0.020 (iii)
TIME TO PEAK (hrs)= 6.50 7.08 7.00
RUNOFF VOLUME (mm)= 191.00 141.08 143.51
TOTAL RAINFALL (mm)= 193.00 193.00 193.00
RUNOFF COEFFICIENT = 0.99 0.73 0.74

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00

```

***** WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!
***** WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%
YOU SHOULD CONSIDER SPLITTING THE AREA.

```

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0906) |
| 1 + 2 = 3 |
-----

```

	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.29	0.027	7.00	133.07
+ ID2= 2 ( 0304):	0.23	0.020	7.00	143.51
=====				
ID = 3 ( 0906):	0.52	0.047	7.00	137.69

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0906) |
| 3 + 2 = 1 |
-----

```

	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.52	0.047	7.00	137.69
+ ID2= 2 ( 0904):	0.73	0.082	7.00	166.45
=====				
ID = 1 ( 0906):	1.25	0.129	7.00	154.49

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0201) | Area (ha)= 0.23
| ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00
-----

```

```

          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.09 0.14
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.70
Length (m)= 39.16 160.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00
0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00

2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

```

Max.Eff.Inten.(mm/hr)= 43.00 57.14
over (min) 5.00 30.00
Storage Coeff. (min)= 1.66 (ii) 29.45 (ii)
Unit Hyd. Tpeak (min)= 5.00 30.00
Unit Hyd. peak (cms)= 0.32 0.04

```

```

*TOTALS*
PEAK FLOW (cms)= 0.00 0.02 0.020 (iii)
TIME TO PEAK (hrs)= 6.50 7.17 7.00
RUNOFF VOLUME (mm)= 191.00 145.17 147.40
TOTAL RAINFALL (mm)= 193.00 193.00 193.00
RUNOFF COEFFICIENT = 0.99 0.75 0.76

```

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0303) | Area (ha)= 0.33
| ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00
-----

```

```

          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.10 0.23
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.70
Length (m)= 46.90 160.00
Mannings n = 0.013 0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	15.00	3.083	3.00	6.083	43.00	9.08	13.00
0.167	15.00	3.167	3.00	6.167	43.00	9.17	13.00

0.250	15.00	3.250	3.00	6.250	43.00	9.25	13.00
0.333	15.00	3.333	3.00	6.333	43.00	9.33	13.00
0.417	15.00	3.417	3.00	6.417	43.00	9.42	13.00
0.500	15.00	3.500	3.00	6.500	43.00	9.50	13.00
0.583	15.00	3.583	3.00	6.583	43.00	9.58	13.00
0.667	15.00	3.667	3.00	6.667	43.00	9.67	13.00
0.750	15.00	3.750	3.00	6.750	43.00	9.75	13.00
0.833	15.00	3.833	3.00	6.833	43.00	9.83	13.00
0.917	15.00	3.917	3.00	6.917	43.00	9.92	13.00
1.000	15.00	4.000	3.00	7.000	43.00	10.00	13.00
1.083	20.00	4.083	5.00	7.083	20.00	10.08	13.00
1.167	20.00	4.167	5.00	7.167	20.00	10.17	13.00
1.250	20.00	4.250	5.00	7.250	20.00	10.25	13.00
1.333	20.00	4.333	5.00	7.333	20.00	10.33	13.00
1.417	20.00	4.417	5.00	7.417	20.00	10.42	13.00
1.500	20.00	4.500	5.00	7.500	20.00	10.50	13.00
1.583	20.00	4.583	5.00	7.583	20.00	10.58	13.00
1.667	20.00	4.667	5.00	7.667	20.00	10.67	13.00
1.750	20.00	4.750	5.00	7.750	20.00	10.75	13.00
1.833	20.00	4.833	5.00	7.833	20.00	10.83	13.00
1.917	20.00	4.917	5.00	7.917	20.00	10.92	13.00
2.000	20.00	5.000	5.00	8.000	20.00	11.00	13.00
2.083	10.00	5.083	20.00	8.083	23.00	11.08	8.00
2.167	10.00	5.167	20.00	8.167	23.00	11.17	8.00
2.250	10.00	5.250	20.00	8.250	23.00	11.25	8.00
2.333	10.00	5.333	20.00	8.333	23.00	11.33	8.00
2.417	10.00	5.417	20.00	8.417	23.00	11.42	8.00
2.500	10.00	5.500	20.00	8.500	23.00	11.50	8.00
2.583	10.00	5.583	20.00	8.583	23.00	11.58	8.00
2.667	10.00	5.667	20.00	8.667	23.00	11.67	8.00
2.750	10.00	5.750	20.00	8.750	23.00	11.75	8.00
2.833	10.00	5.833	20.00	8.833	23.00	11.83	8.00
2.917	10.00	5.917	20.00	8.917	23.00	11.92	8.00
3.000	10.00	6.000	20.00	9.000	23.00	12.00	8.00

Max.Eff.Inten.(mm/hr)= 43.00 49.31  
over (min) 5.00 35.00  
Storage Coeff. (min)= 1.85 (ii) 31.33 (ii)  
Unit Hyd. Tpeak (min)= 5.00 35.00  
Unit Hyd. peak (cms)= 0.32 0.03

\*TOTALS\*  
PEAK FLOW (cms)= 0.00 0.03 0.027 (iii)  
TIME TO PEAK (hrs)= 6.50 7.17 7.00  
RUNOFF VOLUME (mm)= 191.00 140.51 142.98  
TOTAL RAINFALL (mm)= 193.00 193.00 193.00  
RUNOFF COEFFICIENT = 0.99 0.73 0.74

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0903)|
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
-----
ID1= 1 ( 0201):  0.23  0.020   7.00  147.40
+ ID2= 2 ( 0303):  0.33  0.027   7.00  142.98
-----
ID = 3 ( 0903):  0.56  0.048   7.00  144.79
-----

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

=====

V V I SSSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U A A A A L  
 V V I SS U U A A L  
 W I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 O O T T H H Y Y M M O O  
 O O T T H H Y M M O O  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\190  
 1cb87-ce4c-48ca-adc4-5c50ee06bf19\sc

Summary filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\190  
 1cb87-ce4c-48ca-adc4-5c50ee06bf19\sc

DATE: 07/25/2023

TIME: 10:13:53

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (1) 2 Year Design Storm - SCS \*\*  
 \*\*\*\*\*

-----  
 | READ STORM | Filename: C:\Users\JBirchard\AppData  
 | | ata\Local\Temp\

| ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\7793d5b3  
 | Ptotal= 54.40 mm | Comments: 2yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	0.98	12.75	7.83	19.00	0.98
0.50	0.60	6.75	0.98	13.00	4.03	19.25	0.98
0.75	0.60	7.00	0.98	13.25	4.03	19.50	0.98
1.00	0.60	7.25	0.98	13.50	2.94	19.75	0.98
1.25	0.60	7.50	1.20	13.75	2.94	20.00	0.98
1.50	0.60	7.75	1.20	14.00	2.28	20.25	0.98
1.75	0.60	8.00	1.20	14.25	2.28	20.50	0.65
2.00	0.60	8.25	1.20	14.50	1.63	20.75	0.65
2.25	0.60	8.50	1.41	14.75	1.63	21.00	0.65
2.50	0.71	8.75	1.41	15.00	1.63	21.25	0.65
2.75	0.71	9.00	1.52	15.25	1.63	21.50	0.65
3.00	0.71	9.25	1.52	15.50	1.63	21.75	0.65
3.25	0.71	9.50	1.74	15.75	1.63	22.00	0.65
3.50	0.71	9.75	1.74	16.00	1.63	22.25	0.65
3.75	0.71	10.00	1.96	16.25	1.63	22.50	0.65
4.00	0.71	10.25	1.96	16.50	0.98	22.75	0.65
4.25	0.71	10.50	2.50	16.75	0.98	23.00	0.65
4.50	0.87	10.75	2.50	17.00	0.98	23.25	0.65
4.75	0.87	11.00	3.37	17.25	0.98	23.50	0.65
5.00	0.87	11.25	3.37	17.50	0.98	23.75	0.65
5.25	0.87	11.50	5.22	17.75	0.98	24.00	0.65
5.50	0.87	11.75	5.22	18.00	0.98	24.25	0.65
5.75	0.87	12.00	16.10	18.25	0.98		
6.00	0.87	12.25	66.59	18.50	0.98		
6.25	0.87	12.50	7.83	18.75	0.98		

-----  
 | CALIB |  
 | STANDHYD ( 0303) | Area (ha)= 0.33  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)= 0.10	0.23
Dep. Storage	(mm)= 2.00	5.00
Average Slope	(%)= 2.00	0.70
Length	(m)= 46.90	160.00
Mannings n	= 0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----  
 TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN

hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65

4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)= 66.59 18.12  
over (min) 5.00 50.00  
Storage Coeff. (min)= 1.55 (ii) 45.55 (ii)  
Unit Hyd. Tpeak (min)= 5.00 50.00  
Unit Hyd. peak (cms)= 0.33 0.02

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.01 0.007 (iii)  
TIME TO PEAK (hrs)= 12.25 12.92 12.92  
RUNOFF VOLUME (mm)= 52.40 22.08 23.51  
TOTAL RAINFALL (mm)= 54.40 54.40 54.40  
RUNOFF COEFFICIENT = 0.96 0.41 0.43

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |

| STANDHYD ( 0201) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00

-----  
 IMPERVIOUS PERVIOUS (i)  
 Surface Area (ha)= 0.09 0.14  
 Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 0.70  
 Length (m)= 39.16 160.00  
 Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65

2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)= 66.59 24.15  
 over (min) 5.00 45.00  
 Storage Coeff. (min)= 1.39 (ii) 40.61 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 45.00  
 Unit Hyd. peak (cms)= 0.33 0.03

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.01 0.006 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.83 12.83  
 RUNOFF VOLUME (mm)= 52.40 23.91 25.23  
 TOTAL RAINFALL (mm)= 54.40 54.40 54.40



RUNOFF COEFFICIENT = 0.96 0.44 0.46

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)				
1 + 2 = 3				
	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0201):	0.23	0.006	12.83	25.23
+ ID2= 2 ( 0303):	0.33	0.007	12.92	23.51
=====				
ID = 3 ( 0903):	0.56	0.013	12.92	24.22

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB				
NASHYD ( 0202)				
ID= 1 DT= 5.0 min	Area (ha)=	0.16	Curve Number (CN)=	76.5
	Ia (mm)=	4.71	# of Linear Res.(N)=	3.00
U.H. Tp(hrs)= 0.30				

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98

1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65

5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.006 (i)  
 TIME TO PEAK (hrs)= 12.417  
 RUNOFF VOLUME (mm)= 19.321  
 TOTAL RAINFALL (mm)= 54.400  
 RUNOFF COEFFICIENT = 0.355

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	Area (ha)= 0.24
STANDHYD ( 0204)	Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00
ID= 1 DT= 5.0 min	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98

5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)= 66.59 72.05  
over (min) = 5.00 10.00  
Storage Coeff. (min)= 1.41 (ii) 5.26 (ii)  
Unit Hyd. Tpeak (min)= 5.00 10.00  
Unit Hyd. peak (cms)= 0.33 0.16

\*TOTALS\*

PEAK FLOW (cms)= 0.02 0.01 0.030 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25  
RUNOFF VOLUME (mm)= 52.40 26.57 35.85  
TOTAL RAINFALL (mm)= 54.40 54.40 54.40  
RUNOFF COEFFICIENT = 0.96 0.49 0.66

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65

4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)= 66.59 67.30  
over (min) 5.00 10.00  
Storage Coeff. (min)= 1.39 (ii) 5.24 (ii)  
Unit Hyd. Tpeak (min)= 5.00 10.00  
Unit Hyd. peak (cms)= 0.33 0.16

PEAK FLOW (cms)= 0.02 0.01 0.029 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 52.40 25.91 35.70  
TOTAL RAINFALL (mm)= 54.40 54.40 54.40  
RUNOFF COEFFICIENT = 0.96 0.48 0.66

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |

| STANDHYD ( 0206) | Area (ha)= 0.18  
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

-----  
IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.12 0.06  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 34.64 8.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65

2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)=	66.59	34.99
over (min)	5.00	5.00
Storage Coeff. (min)=	1.29 (ii)	4.39 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.33	0.23

\*TOTALS\*  
0.026 (iii)

PEAK FLOW (cms)=	0.02	0.01	0.026 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	52.40	19.96	39.42
TOTAL RAINFALL (mm)=	54.40	54.40	54.40

RUNOFF COEFFICIENT = 0.96 0.37 0.72

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
-----  
CALIB  
STANDHYD ( 0203) Area (ha)= 0.08  
ID= 1 DT= 5.0 min Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98

1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98
1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65

6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65
6.083	0.87	12.167	66.59	18.250	0.98		

Max.Eff.Inten.(mm/hr)=	66.59	82.62
over (min)	5.00	5.00
Storage Coeff. (min)=	1.01 (ii)	4.60 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.23

PEAK FLOW (cms)=	0.01	0.01	0.011 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	52.40	27.91	37.20
TOTAL RAINFALL (mm)=	54.40	54.40	54.40
RUNOFF COEFFICIENT =	0.96	0.51	0.68

\*TOTALS\*

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0203):  0.08  0.011  12.25  37.20
+ ID2= 2 ( 0204):  0.24  0.030  12.25  35.85
=====
ID = 3 ( 0904):  0.32  0.042  12.25  36.19

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0904) |
| 3 + 2 = 1 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 3 ( 0904):  0.32  0.042  12.25  36.19
+ ID2= 2 ( 0205):  0.23  0.029  12.25  35.70
=====
ID = 1 ( 0904):  0.55  0.071  12.25  35.99

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0904)				
1 + 2 = 3				
	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0904):	0.55	0.071	12.25	35.99
+ ID2= 2 ( 0206):	0.18	0.026	12.25	39.42
=====				
ID = 3 ( 0904):	0.73	0.097	12.25	36.83

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB				
STANDHYD ( 0304)				
ID= 1 DT= 5.0 min				
Area (ha)=	0.23			
Total Imp(%)=	31.00	Dir. Conn.(%)=	5.00	

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.07	0.16
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.50
Length (m)=	39.16	100.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	0.87	12.250	66.59	18.33	0.98
0.167	0.00	6.250	0.87	12.333	7.84	18.42	0.98
0.250	0.00	6.333	0.98	12.417	7.83	18.50	0.98
0.333	0.60	6.417	0.98	12.500	7.83	18.58	0.98
0.417	0.60	6.500	0.98	12.583	7.83	18.67	0.98
0.500	0.60	6.583	0.98	12.667	7.83	18.75	0.98
0.583	0.60	6.667	0.98	12.750	7.83	18.83	0.98
0.667	0.60	6.750	0.98	12.833	4.03	18.92	0.98
0.750	0.60	6.833	0.98	12.917	4.03	19.00	0.98
0.833	0.60	6.917	0.98	13.000	4.03	19.08	0.98
0.917	0.60	7.000	0.98	13.083	4.03	19.17	0.98
1.000	0.60	7.083	0.98	13.167	4.03	19.25	0.98
1.083	0.60	7.167	0.98	13.250	4.03	19.33	0.98
1.167	0.60	7.250	0.98	13.333	2.94	19.42	0.98
1.250	0.60	7.333	1.20	13.417	2.94	19.50	0.98
1.333	0.60	7.417	1.20	13.500	2.94	19.58	0.98
1.417	0.60	7.500	1.20	13.583	2.94	19.67	0.98
1.500	0.60	7.583	1.20	13.667	2.94	19.75	0.98
1.583	0.60	7.667	1.20	13.750	2.94	19.83	0.98
1.667	0.60	7.750	1.20	13.833	2.28	19.92	0.98
1.750	0.60	7.833	1.20	13.917	2.28	20.00	0.98
1.833	0.60	7.917	1.20	14.000	2.28	20.08	0.98

1.917	0.60	8.000	1.20	14.083	2.28	20.17	0.98
2.000	0.60	8.083	1.20	14.167	2.28	20.25	0.98
2.083	0.60	8.167	1.20	14.250	2.28	20.33	0.65
2.167	0.60	8.250	1.20	14.333	1.63	20.42	0.65
2.250	0.60	8.333	1.41	14.417	1.63	20.50	0.65
2.333	0.71	8.417	1.41	14.500	1.63	20.58	0.65
2.417	0.71	8.500	1.41	14.583	1.63	20.67	0.65
2.500	0.71	8.583	1.41	14.667	1.63	20.75	0.65
2.583	0.71	8.667	1.41	14.750	1.63	20.83	0.65
2.667	0.71	8.750	1.41	14.833	1.63	20.92	0.65
2.750	0.71	8.833	1.52	14.917	1.63	21.00	0.65
2.833	0.71	8.917	1.52	15.000	1.63	21.08	0.65
2.917	0.71	9.000	1.52	15.083	1.63	21.17	0.65
3.000	0.71	9.083	1.52	15.167	1.63	21.25	0.65
3.083	0.71	9.167	1.52	15.250	1.63	21.33	0.65
3.167	0.71	9.250	1.52	15.333	1.63	21.42	0.65
3.250	0.71	9.333	1.74	15.417	1.63	21.50	0.65
3.333	0.71	9.417	1.74	15.500	1.63	21.58	0.65
3.417	0.71	9.500	1.74	15.583	1.63	21.67	0.65
3.500	0.71	9.583	1.74	15.667	1.63	21.75	0.65
3.583	0.71	9.667	1.74	15.750	1.63	21.83	0.65
3.667	0.71	9.750	1.74	15.833	1.63	21.92	0.65
3.750	0.71	9.833	1.96	15.917	1.63	22.00	0.65
3.833	0.71	9.917	1.96	16.000	1.63	22.08	0.65
3.917	0.71	10.000	1.96	16.083	1.63	22.17	0.65
4.000	0.71	10.083	1.96	16.167	1.63	22.25	0.65
4.083	0.71	10.167	1.96	16.250	1.63	22.33	0.65
4.167	0.71	10.250	1.96	16.333	0.98	22.42	0.65
4.250	0.71	10.333	2.50	16.417	0.98	22.50	0.65
4.333	0.87	10.417	2.50	16.500	0.98	22.58	0.65
4.417	0.87	10.500	2.50	16.583	0.98	22.67	0.65
4.500	0.87	10.583	2.50	16.667	0.98	22.75	0.65
4.583	0.87	10.667	2.50	16.750	0.98	22.83	0.65
4.667	0.87	10.750	2.50	16.833	0.98	22.92	0.65
4.750	0.87	10.833	3.37	16.917	0.98	23.00	0.65
4.833	0.87	10.917	3.37	17.000	0.98	23.08	0.65
4.917	0.87	11.000	3.37	17.083	0.98	23.17	0.65
5.000	0.87	11.083	3.37	17.167	0.98	23.25	0.65
5.083	0.87	11.167	3.37	17.250	0.98	23.33	0.65
5.167	0.87	11.250	3.37	17.333	0.98	23.42	0.65
5.250	0.87	11.333	5.22	17.417	0.98	23.50	0.65
5.333	0.87	11.417	5.22	17.500	0.98	23.58	0.65
5.417	0.87	11.500	5.22	17.583	0.98	23.67	0.65
5.500	0.87	11.583	5.22	17.667	0.98	23.75	0.65
5.583	0.87	11.667	5.22	17.750	0.98	23.83	0.65
5.667	0.87	11.750	5.22	17.833	0.98	23.92	0.65
5.750	0.87	11.833	16.10	17.917	0.98	24.00	0.65
5.833	0.87	11.917	16.10	18.000	0.98	24.08	0.65
5.917	0.87	12.000	16.10	18.083	0.98	24.17	0.65
6.000	0.87	12.083	66.58	18.167	0.98	24.25	0.65

6.083 0.87 |12.167 66.59 |18.250 0.98 |

Max.Eff.Inten.(mm/hr)= 66.59 22.13  
 over (min) 5.00 40.00  
 Storage Coeff. (min)= 1.39 (ii) 35.28 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 40.00  
 Unit Hyd. peak (cms)= 0.33 0.03

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.01 0.006 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.75 12.75  
 RUNOFF VOLUME (mm)= 52.40 22.30 23.71  
 TOTAL RAINFALL (mm)= 54.40 54.40 54.40  
 RUNOFF COEFFICIENT = 0.96 0.41 0.44

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0202):	0.16	0.006	12.42	19.32
+ ID2= 2 ( 0304):	0.23	0.006	12.75	23.71
=====				
ID = 3 ( 0906):	0.39	0.010	12.58	21.91

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)	AREA	QPEAK	TPEAK	R.V.
3 + 2 = 1	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0906):	0.39	0.010	12.58	21.91
+ ID2= 2 ( 0904):	0.73	0.097	12.25	36.83
=====				
ID = 1 ( 0906):	1.12	0.105	12.25	31.64

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

=====

V V I SSSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U A A A A L  
 V V I SS U U A A L  
 W I SSSSS UUUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 0 0 T T H H Y Y MM MM 0 0  
 0 0 T T H H Y M M 0 0  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
 C:\Users\JBirchard\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\54d  
 c4ff8-2052-4789-bce3-57a1e2b83be2\sc  
 Summary filename:  
 C:\Users\JBirchard\AppData\Local\Civica\VH5\d640becb-967e-4731-b5f6-00a4892452ca\54d  
 c4ff8-2052-4789-bce3-57a1e2b83be2\sc

DATE: 07/25/2023

TIME: 10:13:53

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (2) 5 Year Design Storm - SCS \*\*  
 \*\*\*\*\*

-----  
 | READ STORM | Filename: C:\Users\JBirchard\AppData  
 | | ata\Local\Temp\  
 | | ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\f65a105d



| Ptotal= 72.10 mm |

Comments: 5yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.30	12.75	10.38	19.00	1.30
0.50	0.79	6.75	1.30	13.00	5.34	19.25	1.30
0.75	0.79	7.00	1.30	13.25	5.34	19.50	1.30
1.00	0.79	7.25	1.30	13.50	3.89	19.75	1.30
1.25	0.79	7.50	1.59	13.75	3.89	20.00	1.30
1.50	0.79	7.75	1.59	14.00	3.03	20.25	1.30
1.75	0.79	8.00	1.59	14.25	3.03	20.50	0.87
2.00	0.79	8.25	1.59	14.50	2.16	20.75	0.87
2.25	0.79	8.50	1.87	14.75	2.16	21.00	0.87
2.50	0.94	8.75	1.87	15.00	2.16	21.25	0.87
2.75	0.94	9.00	2.02	15.25	2.16	21.50	0.87
3.00	0.94	9.25	2.02	15.50	2.16	21.75	0.87
3.25	0.94	9.50	2.31	15.75	2.16	22.00	0.87
3.50	0.94	9.75	2.31	16.00	2.16	22.25	0.87
3.75	0.94	10.00	2.60	16.25	2.16	22.50	0.87
4.00	0.94	10.25	2.60	16.50	1.30	22.75	0.87
4.25	0.94	10.50	3.32	16.75	1.30	23.00	0.87
4.50	1.15	10.75	3.32	17.00	1.30	23.25	0.87
4.75	1.15	11.00	4.47	17.25	1.30	23.50	0.87
5.00	1.15	11.25	4.47	17.50	1.30	23.75	0.87
5.25	1.15	11.50	6.92	17.75	1.30	24.00	0.87
5.50	1.15	11.75	6.92	18.00	1.30	24.25	0.87
5.75	1.15	12.00	21.34	18.25	1.30		
6.00	1.15	12.25	88.25	18.50	1.30		
6.25	1.15	12.50	10.38	18.75	1.30		

0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87

-----  
 | CALIB  
 | STANDHYD ( 0303)  
 | ID= 1 DT= 5.0 min |

Area (ha)= 0.33  
 Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.30	12.75	10.38	19.00	1.30
0.50	0.79	6.75	1.30	13.00	5.34	19.25	1.30
0.75	0.79	7.00	1.30	13.25	5.34	19.50	1.30
1.00	0.79	7.25	1.30	13.50	3.89	19.75	1.30
1.25	0.79	7.50	1.59	13.75	3.89	20.00	1.30
1.50	0.79	7.75	1.59	14.00	3.03	20.25	1.30
1.75	0.79	8.00	1.59	14.25	3.03	20.50	0.87
2.00	0.79	8.25	1.59	14.50	2.16	20.75	0.87
2.25	0.79	8.50	1.87	14.75	2.16	21.00	0.87
2.50	0.94	8.75	1.87	15.00	2.16	21.25	0.87
2.75	0.94	9.00	2.02	15.25	2.16	21.50	0.87
3.00	0.94	9.25	2.02	15.50	2.16	21.75	0.87
3.25	0.94	9.50	2.31	15.75	2.16	22.00	0.87
3.50	0.94	9.75	2.31	16.00	2.16	22.25	0.87
3.75	0.94	10.00	2.60	16.25	2.16	22.50	0.87
4.00	0.94	10.25	2.60	16.50	1.30	22.75	0.87
4.25	0.94	10.50	3.32	16.75	1.30	23.00	0.87
4.50	1.15	10.75	3.32	17.00	1.30	23.25	0.87
4.75	1.15	11.00	4.47	17.25	1.30	23.50	0.87
5.00	1.15	11.25	4.47	17.50	1.30	23.75	0.87
5.25	1.15	11.50	6.92	17.75	1.30	24.00	0.87
5.50	1.15	11.75	6.92	18.00	1.30	24.25	0.87
5.75	1.15	12.00	21.34	18.25	1.30		
6.00	1.15	12.25	88.25	18.50	1.30		
6.25	1.15	12.50	10.38	18.75	1.30		

4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max. Eff. Inten. (mm/hr)= 88.25 34.63  
over (min) 5.00 40.00  
Storage Coeff. (min)= 1.38 (ii) 35.34 (ii)  
Unit Hyd. Tpeak (min)= 5.00 40.00  
Unit Hyd. peak (cms)= 0.33 0.03

PEAK FLOW (cms)= 0.00 0.01 \*TOTALS\*  
TIME TO PEAK (hrs)= 12.25 12.75 0.014 (iii)  
RUNOFF VOLUME (mm)= 70.10 34.89 36.58  
TOTAL RAINFALL (mm)= 72.10 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.48 0.51

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0201) | Area (ha)= 0.23

|ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00

-----  
IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.09 0.14  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 0.70  
Length (m)= 39.16 160.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87

3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max.Eff.Inten.(mm/hr)= 88.25 47.20  
over (min) 5.00 35.00  
Storage Coeff. (min)= 1.24 (ii) 31.24 (ii)  
Unit Hyd. Tpeak (min)= 5.00 35.00  
Unit Hyd. peak (cms)= 0.33 0.03

PEAK FLOW (cms)= 0.00 0.01  
TIME TO PEAK (hrs)= 12.25 12.67  
RUNOFF VOLUME (mm)= 70.10 37.29  
TOTAL RAINFALL (mm)= 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.52

\*TOTALS\*  
0.012 (iii)  
12.67  
38.85  
72.10  
0.54

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0903) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0201):  0.23  0.012  12.67  38.85
+ ID2= 2 ( 0303):  0.33  0.014  12.75  36.58
-----
ID = 3 ( 0903):  0.56  0.026  12.75  37.51

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0202) | Area (ha)= 0.16 Curve Number (CN)= 76.5
| ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
|-----| U.H. Tp(hrs)= 0.30

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----
      TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN
      hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr
0.083 0.00 | 6.167 1.15 | 12.250 88.25 | 18.33 1.30
0.167 0.00 | 6.250 1.15 | 12.333 10.39 | 18.42 1.30
0.250 0.00 | 6.333 1.30 | 12.417 10.38 | 18.50 1.30
0.333 0.79 | 6.417 1.30 | 12.500 10.38 | 18.58 1.30
0.417 0.79 | 6.500 1.30 | 12.583 10.38 | 18.67 1.30
0.500 0.79 | 6.583 1.30 | 12.667 10.38 | 18.75 1.30
0.583 0.79 | 6.667 1.30 | 12.750 10.38 | 18.83 1.30
0.667 0.79 | 6.750 1.30 | 12.833 5.34 | 18.92 1.30
0.750 0.79 | 6.833 1.30 | 12.917 5.34 | 19.00 1.30
0.833 0.79 | 6.917 1.30 | 13.000 5.34 | 19.08 1.30
0.917 0.79 | 7.000 1.30 | 13.083 5.34 | 19.17 1.30
1.000 0.79 | 7.083 1.30 | 13.167 5.34 | 19.25 1.30
1.083 0.79 | 7.167 1.30 | 13.250 5.34 | 19.33 1.30
1.167 0.79 | 7.250 1.30 | 13.333 3.89 | 19.42 1.30

```

1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87

5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.010 (i)  
TIME TO PEAK (hrs)= 12.417  
RUNOFF VOLUME (mm)= 31.214  
TOTAL RAINFALL (mm)= 72.100  
RUNOFF COEFFICIENT = 0.433

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----			
CALIB			
STANDHYD ( 0204)			
ID= 1 DT= 5.0 min			
-----			
Area (ha)=	0.24		
Total Imp(%)=	65.00	Dir. Conn.(%)=	36.00
-----			
	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.16	0.08	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	1.00	
Length (m)=	40.00	8.00	
Mannings n =	0.013	0.250	

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30

1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87

5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max.Eff.Inten.(mm/hr)= 88.25 109.65  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.26 (ii) 4.70 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.33 0.22

\*TOTALS\*

PEAK FLOW (cms)= 0.02 0.02 0.046 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 70.10 40.72 51.29  
TOTAL RAINFALL (mm)= 72.10 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.56 0.71

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.15	0.08
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	39.16	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87

4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max.Eff.Inten.(mm/hr)= 88.25 102.90  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.24 (ii) 4.68 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.33 0.22

\*TOTALS\*

PEAK FLOW (cms)= 0.02 0.02 0.044 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 70.10 39.88 51.05  
TOTAL RAINFALL (mm)= 72.10 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.55 0.71

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0206) | Area (ha)= 0.18

|ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.12	0.06
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	34.64	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87

3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max. Eff. Inten. (mm/hr)=	88.25	56.04
over (min)	5.00	5.00
Storage Coeff. (min)=	1.15 (ii)	3.93 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.24

\*TOTALS\*

PEAK FLOW (cms)=	0.03	0.01	0.036 (iii)
TIME TO PEAK (hrs)=	12.25	12.25	12.25
RUNOFF VOLUME (mm)=	70.10	32.03	54.87
TOTAL RAINFALL (mm)=	72.10	72.10	72.10
RUNOFF COEFFICIENT =	0.97	0.44	0.76

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0203) | Area (ha)= 0.08
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00
-----

```

```

                IMPERVIOUS    PERVIOUS (i)
Surface Area   (ha)=         0.06         0.02
Dep. Storage   (mm)=         2.00         5.00
Average Slope  (%)=         2.00         1.00
Length         (m)=        23.09         8.00
Mannings n    =          0.013         0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30

1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30
2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86



6.083 1.15 |12.167 88.25 |18.250 1.30 |

Max.Eff.Inten.(mm/hr)= 88.25 124.54  
over (min) 5.00 5.00  
Storage Coeff. (min)= 0.91 (ii) 4.11 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.24

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.01 0.016 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 70.10 42.41 52.92  
TOTAL RAINFALL (mm)= 72.10 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.59 0.73

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0904) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0203): 0.08 0.016 12.25 52.92  
+ ID2= 2 ( 0204): 0.24 0.046 12.25 51.29  
=====

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| ADD HYD ( 0904) |  
| 3 + 2 = 1 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 3 ( 0904): 0.32 0.062 12.25 51.70  
+ ID2= 2 ( 0205): 0.23 0.044 12.25 51.05  
=====

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| ADD HYD ( 0904) |

-----  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0904): 0.55 0.106 12.25 51.43  
+ ID2= 2 ( 0206): 0.18 0.036 12.25 54.87  
=====

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0304) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00  
-----

IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.07 0.16  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 0.50  
Length (m)= 39.16 100.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.15	12.250	88.25	18.33	1.30
0.167	0.00	6.250	1.15	12.333	10.39	18.42	1.30
0.250	0.00	6.333	1.30	12.417	10.38	18.50	1.30
0.333	0.79	6.417	1.30	12.500	10.38	18.58	1.30
0.417	0.79	6.500	1.30	12.583	10.38	18.67	1.30
0.500	0.79	6.583	1.30	12.667	10.38	18.75	1.30
0.583	0.79	6.667	1.30	12.750	10.38	18.83	1.30
0.667	0.79	6.750	1.30	12.833	5.34	18.92	1.30
0.750	0.79	6.833	1.30	12.917	5.34	19.00	1.30
0.833	0.79	6.917	1.30	13.000	5.34	19.08	1.30
0.917	0.79	7.000	1.30	13.083	5.34	19.17	1.30
1.000	0.79	7.083	1.30	13.167	5.34	19.25	1.30
1.083	0.79	7.167	1.30	13.250	5.34	19.33	1.30
1.167	0.79	7.250	1.30	13.333	3.89	19.42	1.30
1.250	0.79	7.333	1.59	13.417	3.89	19.50	1.30
1.333	0.79	7.417	1.59	13.500	3.89	19.58	1.30
1.417	0.79	7.500	1.59	13.583	3.89	19.67	1.30
1.500	0.79	7.583	1.59	13.667	3.89	19.75	1.30
1.583	0.79	7.667	1.59	13.750	3.89	19.83	1.30
1.667	0.79	7.750	1.59	13.833	3.03	19.92	1.30
1.750	0.79	7.833	1.59	13.917	3.03	20.00	1.30
1.833	0.79	7.917	1.59	14.000	3.03	20.08	1.30
1.917	0.79	8.000	1.59	14.083	3.03	20.17	1.30

2.000	0.79	8.083	1.59	14.167	3.03	20.25	1.30
2.083	0.79	8.167	1.59	14.250	3.03	20.33	0.87
2.167	0.79	8.250	1.59	14.333	2.16	20.42	0.87
2.250	0.79	8.333	1.87	14.417	2.16	20.50	0.87
2.333	0.94	8.417	1.87	14.500	2.16	20.58	0.87
2.417	0.94	8.500	1.87	14.583	2.16	20.67	0.87
2.500	0.94	8.583	1.87	14.667	2.16	20.75	0.87
2.583	0.94	8.667	1.87	14.750	2.16	20.83	0.87
2.667	0.94	8.750	1.87	14.833	2.16	20.92	0.87
2.750	0.94	8.833	2.02	14.917	2.16	21.00	0.87
2.833	0.94	8.917	2.02	15.000	2.16	21.08	0.87
2.917	0.94	9.000	2.02	15.083	2.16	21.17	0.87
3.000	0.94	9.083	2.02	15.167	2.16	21.25	0.87
3.083	0.94	9.167	2.02	15.250	2.16	21.33	0.87
3.167	0.94	9.250	2.02	15.333	2.16	21.42	0.87
3.250	0.94	9.333	2.31	15.417	2.16	21.50	0.87
3.333	0.94	9.417	2.31	15.500	2.16	21.58	0.87
3.417	0.94	9.500	2.31	15.583	2.16	21.67	0.87
3.500	0.94	9.583	2.31	15.667	2.16	21.75	0.87
3.583	0.94	9.667	2.31	15.750	2.16	21.83	0.87
3.667	0.94	9.750	2.31	15.833	2.16	21.92	0.87
3.750	0.94	9.833	2.60	15.917	2.16	22.00	0.87
3.833	0.94	9.917	2.60	16.000	2.16	22.08	0.87
3.917	0.94	10.000	2.60	16.083	2.16	22.17	0.87
4.000	0.94	10.083	2.60	16.167	2.16	22.25	0.87
4.083	0.94	10.167	2.60	16.250	2.16	22.33	0.87
4.167	0.94	10.250	2.60	16.333	1.30	22.42	0.87
4.250	0.94	10.333	3.32	16.417	1.30	22.50	0.87
4.333	1.15	10.417	3.32	16.500	1.30	22.58	0.87
4.417	1.15	10.500	3.32	16.583	1.30	22.67	0.87
4.500	1.15	10.583	3.32	16.667	1.30	22.75	0.87
4.583	1.15	10.667	3.32	16.750	1.30	22.83	0.87
4.667	1.15	10.750	3.32	16.833	1.30	22.92	0.87
4.750	1.15	10.833	4.47	16.917	1.30	23.00	0.87
4.833	1.15	10.917	4.47	17.000	1.30	23.08	0.87
4.917	1.15	11.000	4.47	17.083	1.30	23.17	0.87
5.000	1.15	11.083	4.47	17.167	1.30	23.25	0.87
5.083	1.15	11.167	4.47	17.250	1.30	23.33	0.87
5.167	1.15	11.250	4.47	17.333	1.30	23.42	0.87
5.250	1.15	11.333	6.92	17.417	1.30	23.50	0.87
5.333	1.15	11.417	6.92	17.500	1.30	23.58	0.87
5.417	1.15	11.500	6.92	17.583	1.30	23.67	0.87
5.500	1.15	11.583	6.92	17.667	1.30	23.75	0.87
5.583	1.15	11.667	6.92	17.750	1.30	23.83	0.87
5.667	1.15	11.750	6.92	17.833	1.30	23.92	0.87
5.750	1.15	11.833	21.34	17.917	1.30	24.00	0.87
5.833	1.15	11.917	21.34	18.000	1.30	24.08	0.87
5.917	1.15	12.000	21.34	18.083	1.30	24.17	0.87
6.000	1.15	12.083	88.24	18.167	1.30	24.25	0.86
6.083	1.15	12.167	88.25	18.250	1.30		

Max.Eff.Inten.(mm/hr)= 88.25 39.80  
over (min) 5.00 30.00  
Storage Coeff. (min)= 1.24 (ii) 28.04 (ii)  
Unit Hyd. Tpeak (min)= 5.00 30.00  
Unit Hyd. peak (cms)= 0.33 0.04

PEAK FLOW (cms)= 0.00 0.01 0.012 (iii)  
TIME TO PEAK (hrs)= 12.25 12.58 12.58  
RUNOFF VOLUME (mm)= 70.10 35.17 36.84  
TOTAL RAINFALL (mm)= 72.10 72.10 72.10  
RUNOFF COEFFICIENT = 0.97 0.49 0.51

\*TOTALS\*

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0906) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0202):  0.16  0.010  12.42  31.21
+ ID2= 2 ( 0304):  0.23  0.012  12.58  36.84
=====
ID = 3 ( 0906):  0.39  0.020  12.50  34.53

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| ADD HYD ( 0906) |
| 3 + 2 = 1 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 3 ( 0906):  0.39  0.020  12.50  34.53
+ ID2= 2 ( 0904):  0.73  0.142  12.25  52.27
=====
ID = 1 ( 0906):  1.12  0.157  12.25  46.10

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```
V V I SSSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
W I SSSSS UUUUU A A LLLLL
```

```
000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\55b  
 def29-5587-4829-b23b-1de6395149aa\sc

Summary filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\55b  
 def29-5587-4829-b23b-1de6395149aa\sc

DATE: 07/25/2023

TIME: 10:13:54

USER:

COMMENTS: \_\_\_\_\_

```
*****
** SIMULATION : (3) 10 Year Design Storm - SC **
*****
```

```
-----
| READ STORM | Filename: C:\Users\JBirchard\AppData
|            | ata\Local\Temp\
|            | ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\965a2d52
| Ptotal= 83.81 mm | Comments: 10yr 24hr 15min SCS
```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.51	12.75	12.07	19.00	1.51
0.50	0.92	6.75	1.51	13.00	6.20	19.25	1.51
0.75	0.92	7.00	1.51	13.25	6.20	19.50	1.51
1.00	0.92	7.25	1.51	13.50	4.53	19.75	1.51
1.25	0.92	7.50	1.84	13.75	4.53	20.00	1.51
1.50	0.92	7.75	1.84	14.00	3.52	20.25	1.51
1.75	0.92	8.00	1.84	14.25	3.52	20.50	1.01
2.00	0.92	8.25	1.84	14.50	2.51	20.75	1.01
2.25	0.92	8.50	2.18	14.75	2.51	21.00	1.01
2.50	1.09	8.75	2.18	15.00	2.51	21.25	1.01
2.75	1.09	9.00	2.35	15.25	2.51	21.50	1.01
3.00	1.09	9.25	2.35	15.50	2.51	21.75	1.01
3.25	1.09	9.50	2.68	15.75	2.51	22.00	1.01
3.50	1.09	9.75	2.68	16.00	2.51	22.25	1.01
3.75	1.09	10.00	3.02	16.25	2.51	22.50	1.01
4.00	1.09	10.25	3.02	16.50	1.51	22.75	1.01
4.25	1.09	10.50	3.86	16.75	1.51	23.00	1.01
4.50	1.34	10.75	3.86	17.00	1.51	23.25	1.01
4.75	1.34	11.00	5.20	17.25	1.51	23.50	1.01
5.00	1.34	11.25	5.20	17.50	1.51	23.75	1.01
5.25	1.34	11.50	8.05	17.75	1.51	24.00	1.01
5.50	1.34	11.75	8.05	18.00	1.51	24.25	1.01
5.75	1.34	12.00	24.81	18.25	1.51		
6.00	1.34	12.25	102.58	18.50	1.51		
6.25	1.34	12.50	12.07	18.75	1.51		

```
-----
| CALIB |
| STANDHYD ( 0303) | Area (ha)= 0.33
| ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00
```

```
IMPERVIOUS PERVIOUS (i)
Surface Area (ha)= 0.10 0.23
Dep. Storage (mm)= 2.00 5.00
Average Slope (%)= 2.00 0.70
Length (m)= 46.90 160.00
Mannings n = 0.013 0.250
```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```
----- TRANSFORMED HYETOGRAPH -----
```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51

0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51	4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51	4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51	4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51	4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51	4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51	4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51	4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51	4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51	5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51	5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51	5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51	5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51	5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51	5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51	5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51	5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51	5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51	5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51	5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51	5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51	6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51	6.083	1.34	12.167	102.58	18.250	1.51		
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51								
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01								
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01	Max.Eff.Inten.(mm/hr)=	102.58	49.41					
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01	over (min)	5.00	35.00					
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01	Storage Coeff. (min)=	1.30 (ii)	30.76 (ii)					
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01	Unit Hyd. Tpeak (min)=	5.00	35.00					
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01	Unit Hyd. peak (cms)=	0.33	0.04					
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01								
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01	PEAK FLOW (cms)=	0.00	0.02	0.020 (iii)				
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01	TIME TO PEAK (hrs)=	12.25	12.67	12.67				
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01	RUNOFF VOLUME (mm)=	81.81	44.01	45.84				
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01	TOTAL RAINFALL (mm)=	83.81	83.81	83.81				
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01	RUNOFF COEFFICIENT =	0.98	0.53	0.55				
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01								
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01	***** WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!							
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01	***** WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%							
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01	YOU SHOULD CONSIDER SPLITTING THE AREA.							
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01								
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01	(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:							
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01	CN* = 74.0 Ia = Dep. Storage (Above)							
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01	(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL							
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01	THAN THE STORAGE COEFFICIENT.							
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01	(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.							
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01								
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01								
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01								
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01								
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01								

-----  
| CALIB |  
| STANDHYD ( 0201) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01

3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		
Max. Eff. Inten. (mm/hr)=	102.58	59.54					
over (min)	5.00	30.00					
Storage Coeff. (min)=	1.17 (ii)	28.51 (ii)					
Unit Hyd. Tpeak (min)=	5.00	30.00					
Unit Hyd. peak (cms)=	0.34	0.04					
							*TOTALS*
PEAK FLOW (cms)=	0.00	0.02					0.016 (iii)
TIME TO PEAK (hrs)=	12.25	12.58					12.58
RUNOFF VOLUME (mm)=	81.81	46.75					48.43
TOTAL RAINFALL (mm)=	83.81	83.81					83.81
RUNOFF COEFFICIENT =	0.98	0.56					0.58

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
1 + 2 = 3				
ID1= 1 ( 0201):	0.23	0.016	12.58	48.43
+ ID2= 2 ( 0303):	0.33	0.020	12.67	45.84
ID = 3 ( 0903):	0.56	0.035	12.67	46.90

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB	Area (ha)=	Curve Number (CN)=
NASHYD ( 0202)	0.16	76.5
ID= 1 DT= 5.0 min	Ia (mm)= 4.71	# of Linear Res.(N)= 3.00
	U.H. Tp(hrs)= 0.30	

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51

1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01

5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.012 (i)  
 TIME TO PEAK (hrs)= 12.417  
 RUNOFF VOLUME (mm)= 39.801  
 TOTAL RAINFALL (mm)= 83.810  
 RUNOFF COEFFICIENT = 0.475

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	
STANDHYD ( 0204)	Area (ha)= 0.24
ID= 1 DT= 5.0 min	Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51

1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01

5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Max.Eff.Inten.(mm/hr)= 102.58 135.58  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.19 (ii) 4.42 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.33 0.23

PEAK FLOW (cms)= 0.02 0.03  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 81.81 50.61 61.83  
TOTAL RAINFALL (mm)= 83.81 83.81 83.81  
RUNOFF COEFFICIENT = 0.98 0.60 0.74

\*TOTALS\*

0.056 (iii)

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----  
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN

hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01



4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Max.Eff.Inten.(mm/hr)= 102.58 127.54  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.17 (ii) 4.41 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.23

PEAK FLOW (cms)= 0.02 0.03  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 81.81 49.67 61.55  
TOTAL RAINFALL (mm)= 83.81 83.81 83.81  
RUNOFF COEFFICIENT = 0.98 0.59 0.73

\*TOTALS\*

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0206) | Area (ha)= 0.18  
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

-----  
IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.12 0.06  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 34.64 8.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01

3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Max. Eff. Inten. (mm/hr)= 102.58 71.08  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.09 (ii) 3.70 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*

PEAK FLOW (cms)= 0.03 0.01 0.043 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 81.81 40.73 65.37  
TOTAL RAINFALL (mm)= 83.81 83.81 83.81  
RUNOFF COEFFICIENT = 0.98 0.49 0.78

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB			
STANDHYD ( 0203)	Area (ha)=	0.08	
ID= 1 DT= 5.0 min	Total Imp(%)=	69.00	Dir. Conn.(%)= 38.00
-----			
		IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=		0.06	0.02
Dep. Storage (mm)=		2.00	5.00
Average Slope (%)=		2.00	1.00
Length (m)=		23.09	8.00
Mannings n =		0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51

2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51
2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Max.Eff.Inten.(mm/hr)= 102.58 153.28  
over (min) 5.00 5.00  
Storage Coeff. (min)= 0.85 (ii) 3.87 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.01 0.019 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 81.81 52.50 63.62  
TOTAL RAINFALL (mm)= 83.81 83.81 83.81  
RUNOFF COEFFICIENT = 0.98 0.63 0.76

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0904) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0203): 0.08 0.019 12.25 63.62  
+ ID2= 2 ( 0204): 0.24 0.056 12.25 61.83  
===== ID = 3 ( 0904): 0.32 0.075 12.25 62.28

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| ADD HYD ( 0904) |  
| 3 + 2 = 1 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 3 ( 0904): 0.32 0.075 12.25 62.28  
+ ID2= 2 ( 0205): 0.23 0.053 12.25 61.55  
===== ID = 1 ( 0904): 0.55 0.128 12.25 61.98

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| ADD HYD ( 0904) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.

	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0904):	0.55	0.128	12.25	61.98
+ ID2= 2 ( 0206):	0.18	0.043	12.25	65.37
=====				
ID = 3 ( 0904):	0.73	0.171	12.25	62.81

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB	Area (ha)=	0.23
STANDHYD ( 0304)	Total Imp(%)=	31.00
ID= 1 DT= 5.0 min	Dir. Conn.(%)=	5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.07	0.16
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.50
Length (m)=	39.16	100.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.34	12.250	102.58	18.33	1.51
0.167	0.00	6.250	1.34	12.333	12.08	18.42	1.51
0.250	0.00	6.333	1.51	12.417	12.07	18.50	1.51
0.333	0.92	6.417	1.51	12.500	12.07	18.58	1.51
0.417	0.92	6.500	1.51	12.583	12.07	18.67	1.51
0.500	0.92	6.583	1.51	12.667	12.07	18.75	1.51
0.583	0.92	6.667	1.51	12.750	12.07	18.83	1.51
0.667	0.92	6.750	1.51	12.833	6.20	18.92	1.51
0.750	0.92	6.833	1.51	12.917	6.20	19.00	1.51
0.833	0.92	6.917	1.51	13.000	6.20	19.08	1.51
0.917	0.92	7.000	1.51	13.083	6.20	19.17	1.51
1.000	0.92	7.083	1.51	13.167	6.20	19.25	1.51
1.083	0.92	7.167	1.51	13.250	6.20	19.33	1.51
1.167	0.92	7.250	1.51	13.333	4.53	19.42	1.51
1.250	0.92	7.333	1.84	13.417	4.53	19.50	1.51
1.333	0.92	7.417	1.84	13.500	4.53	19.58	1.51
1.417	0.92	7.500	1.84	13.583	4.53	19.67	1.51
1.500	0.92	7.583	1.84	13.667	4.53	19.75	1.51
1.583	0.92	7.667	1.84	13.750	4.53	19.83	1.51
1.667	0.92	7.750	1.84	13.833	3.52	19.92	1.51
1.750	0.92	7.833	1.84	13.917	3.52	20.00	1.51
1.833	0.92	7.917	1.84	14.000	3.52	20.08	1.51
1.917	0.92	8.000	1.84	14.083	3.52	20.17	1.51
2.000	0.92	8.083	1.84	14.167	3.52	20.25	1.51

2.083	0.92	8.167	1.84	14.250	3.52	20.33	1.01
2.167	0.92	8.250	1.84	14.333	2.51	20.42	1.01
2.250	0.92	8.333	2.18	14.417	2.51	20.50	1.01
2.333	1.09	8.417	2.18	14.500	2.51	20.58	1.01
2.417	1.09	8.500	2.18	14.583	2.51	20.67	1.01
2.500	1.09	8.583	2.18	14.667	2.51	20.75	1.01
2.583	1.09	8.667	2.18	14.750	2.51	20.83	1.01
2.667	1.09	8.750	2.18	14.833	2.51	20.92	1.01
2.750	1.09	8.833	2.35	14.917	2.51	21.00	1.01
2.833	1.09	8.917	2.35	15.000	2.51	21.08	1.01
2.917	1.09	9.000	2.35	15.083	2.51	21.17	1.01
3.000	1.09	9.083	2.35	15.167	2.51	21.25	1.01
3.083	1.09	9.167	2.35	15.250	2.51	21.33	1.01
3.167	1.09	9.250	2.35	15.333	2.51	21.42	1.01
3.250	1.09	9.333	2.68	15.417	2.51	21.50	1.01
3.333	1.09	9.417	2.68	15.500	2.51	21.58	1.01
3.417	1.09	9.500	2.68	15.583	2.51	21.67	1.01
3.500	1.09	9.583	2.68	15.667	2.51	21.75	1.01
3.583	1.09	9.667	2.68	15.750	2.51	21.83	1.01
3.667	1.09	9.750	2.68	15.833	2.51	21.92	1.01
3.750	1.09	9.833	3.02	15.917	2.51	22.00	1.01
3.833	1.09	9.917	3.02	16.000	2.51	22.08	1.01
3.917	1.09	10.000	3.02	16.083	2.51	22.17	1.01
4.000	1.09	10.083	3.02	16.167	2.51	22.25	1.01
4.083	1.09	10.167	3.02	16.250	2.51	22.33	1.01
4.167	1.09	10.250	3.02	16.333	1.51	22.42	1.01
4.250	1.09	10.333	3.86	16.417	1.51	22.50	1.01
4.333	1.34	10.417	3.86	16.500	1.51	22.58	1.01
4.417	1.34	10.500	3.86	16.583	1.51	22.67	1.01
4.500	1.34	10.583	3.86	16.667	1.51	22.75	1.01
4.583	1.34	10.667	3.86	16.750	1.51	22.83	1.01
4.667	1.34	10.750	3.86	16.833	1.51	22.92	1.01
4.750	1.34	10.833	5.20	16.917	1.51	23.00	1.01
4.833	1.34	10.917	5.20	17.000	1.51	23.08	1.01
4.917	1.34	11.000	5.20	17.083	1.51	23.17	1.01
5.000	1.34	11.083	5.20	17.167	1.51	23.25	1.01
5.083	1.34	11.167	5.20	17.250	1.51	23.33	1.01
5.167	1.34	11.250	5.20	17.333	1.51	23.42	1.01
5.250	1.34	11.333	8.05	17.417	1.51	23.50	1.01
5.333	1.34	11.417	8.05	17.500	1.51	23.58	1.01
5.417	1.34	11.500	8.05	17.583	1.51	23.67	1.01
5.500	1.34	11.583	8.05	17.667	1.51	23.75	1.01
5.583	1.34	11.667	8.05	17.750	1.51	23.83	1.01
5.667	1.34	11.750	8.05	17.833	1.51	23.92	1.01
5.750	1.34	11.833	24.81	17.917	1.51	24.00	1.01
5.833	1.34	11.917	24.81	18.000	1.51	24.08	1.01
5.917	1.34	12.000	24.81	18.083	1.51	24.17	1.01
6.000	1.34	12.083	102.57	18.167	1.51	24.25	1.01
6.083	1.34	12.167	102.58	18.250	1.51		

Max.Eff.Inten.(mm/hr)= 102.58 57.69  
 over (min) 5.00 25.00  
 Storage Coeff. (min)= 1.17 (ii) 24.27 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 25.00  
 Unit Hyd. peak (cms)= 0.34 0.05

PEAK FLOW (cms)= 0.00 0.02  
 TIME TO PEAK (hrs)= 12.25 12.50  
 RUNOFF VOLUME (mm)= 81.81 44.34  
 TOTAL RAINFALL (mm)= 83.81 83.81  
 RUNOFF COEFFICIENT = 0.98 0.53

\*TOTALS\*  
 0.017 (iii)  
 12.50  
 46.15  
 83.81  
 0.55

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
1 + 2 = 3				
ID1= 1 ( 0202):	0.16	0.012	12.42	39.80
+ ID2= 2 ( 0304):	0.23	0.017	12.50	46.15
=====				
ID = 3 ( 0906):	0.39	0.028	12.50	43.55

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
3 + 2 = 1				
ID1= 3 ( 0906):	0.39	0.028	12.50	43.55
+ ID2= 2 ( 0904):	0.73	0.171	12.25	62.81
=====				
ID = 1 ( 0906):	1.12	0.192	12.25	56.10

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

V V I SSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U A A A A L  
 V V I SS U U A A L  
 W I SSSS UUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 O O T T H H Y Y M M O O  
 O O T T H H Y M M O O  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\V02\voin.dat

Output filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\64e  
 e1b99-9ab6-4ec1-8551-c2828a4e3371\sc

Summary filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\64e  
 e1b99-9ab6-4ec1-8551-c2828a4e3371\sc

DATE: 07/25/2023

TIME: 10:13:54

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (4) 25 Year Design Storm - SC \*\*  
 \*\*\*\*\*

READ STORM	Filename: C:\Users\JBirchard\AppData\Local\Temp\ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\7c77deb8
Ptotal= 98.65 mm	Comments: 25yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.78	12.75	14.21	19.00	1.78
0.50	1.09	6.75	1.78	13.00	7.30	19.25	1.78
0.75	1.09	7.00	1.78	13.25	7.30	19.50	1.78
1.00	1.09	7.25	1.78	13.50	5.33	19.75	1.78
1.25	1.09	7.50	2.17	13.75	5.33	20.00	1.78
1.50	1.09	7.75	2.17	14.00	4.14	20.25	1.78
1.75	1.09	8.00	2.17	14.25	4.14	20.50	1.18
2.00	1.09	8.25	2.17	14.50	2.96	20.75	1.18
2.25	1.09	8.50	2.56	14.75	2.96	21.00	1.18
2.50	1.28	8.75	2.56	15.00	2.96	21.25	1.18
2.75	1.28	9.00	2.76	15.25	2.96	21.50	1.18
3.00	1.28	9.25	2.76	15.50	2.96	21.75	1.18
3.25	1.28	9.50	3.16	15.75	2.96	22.00	1.18
3.50	1.28	9.75	3.16	16.00	2.96	22.25	1.18
3.75	1.28	10.00	3.55	16.25	2.96	22.50	1.18
4.00	1.28	10.25	3.55	16.50	1.78	22.75	1.18
4.25	1.28	10.50	4.54	16.75	1.78	23.00	1.18
4.50	1.58	10.75	4.54	17.00	1.78	23.25	1.18
4.75	1.58	11.00	6.12	17.25	1.78	23.50	1.18
5.00	1.58	11.25	6.12	17.50	1.78	23.75	1.18
5.25	1.58	11.50	9.47	17.75	1.78	24.00	1.18
5.50	1.58	11.75	9.47	18.00	1.78	24.25	1.18
5.75	1.58	12.00	29.20	18.25	1.78		
6.00	1.58	12.25	120.75	18.50	1.78		
6.25	1.58	12.50	14.21	18.75	1.78		

0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18

-----  
 -----  
 CALIB  
 STANDHYD ( 0303) Area (ha)= 0.33  
 ID= 1 DT= 5.0 min Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)= 0.10	0.23
Dep. Storage	(mm)= 2.00	5.00
Average Slope	(%)= 2.00	0.70
Length	(m)= 46.90	160.00
Mannings n	= 0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78

4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

Max.Eff.Inten.(mm/hr)= 120.75 63.40  
over (min) 5.00 30.00  
Storage Coeff. (min)= 1.22 (ii) 27.88 (ii)  
Unit Hyd. Tpeak (min)= 5.00 30.00  
Unit Hyd. peak (cms)= 0.33 0.04

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.03 0.027 (iii)  
TIME TO PEAK (hrs)= 12.25 12.58 12.58  
RUNOFF VOLUME (mm)= 96.65 56.11 58.09  
TOTAL RAINFALL (mm)= 98.65 98.65 98.65  
RUNOFF COEFFICIENT = 0.98 0.57 0.59

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----			
CALIB	Area (ha)=	0.23	
STANDHYD ( 0201)	Total Imp(%)=	38.00	Dir. Conn.(%)= 5.00
ID= 1 DT= 5.0 min			
-----			

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.09	0.14
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	0.70
Length	(m)=	39.16	160.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18

3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

Max.Eff.Inten.(mm/hr)= 120.75 86.34  
over (min) 5.00 25.00  
Storage Coeff. (min)= 1.10 (ii) 24.66 (ii)  
Unit Hyd. Tpeak (min)= 5.00 25.00  
Unit Hyd. peak (cms)= 0.34 0.05

\*TOTALS\*  
0.022 (iii)  
12.50  
61.03  
98.65  
0.62

PEAK FLOW (cms)= 0.00 0.02  
TIME TO PEAK (hrs)= 12.25 12.50  
RUNOFF VOLUME (mm)= 96.65 59.22  
TOTAL RAINFALL (mm)= 98.65 98.65  
RUNOFF COEFFICIENT = 0.98 0.60

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)				
1 + 2 = 3				
	AREA	QPEAK	TPEAK	R.V.
	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0201):	0.23	0.022	12.50	61.03
+ ID2= 2 ( 0303):	0.33	0.027	12.58	58.09
=====				
ID = 3 ( 0903):	0.56	0.049	12.58	59.30

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB				
NASHYD ( 0202)				
ID= 1 DT= 5.0 min	Area (ha)=	0.16	Curve Number (CN)=	76.5
	Ia (mm)=	4.71	# of Linear Res.(N)=	3.00
	U.H. Tp(hrs)=	0.30		

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78



1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18

5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.016 (i)  
 TIME TO PEAK (hrs)= 12.417  
 RUNOFF VOLUME (mm)= 51.292  
 TOTAL RAINFALL (mm)= 98.650  
 RUNOFF COEFFICIENT = 0.520

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 CALIB  
 STANDHYD ( 0204) Area (ha)= 0.24  
 ID= 1 DT= 5.0 min Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78

1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18

5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

Max.Eff.Inten.(mm/hr)= 120.75 169.15  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.11 (ii) 4.14 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.24

\*TOTALS\*

PEAK FLOW (cms)= 0.03 0.04 0.068 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 96.65 63.57 75.47  
TOTAL RAINFALL (mm)= 98.65 98.65 98.65  
RUNOFF COEFFICIENT = 0.98 0.64 0.77

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.15	0.08
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	39.16	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----  
TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN  
hrs mm/hr | hrs mm/hr | hrs mm/hr | hrs mm/hr

0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78	4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78	4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78	4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78	4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78	4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78	4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78	4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78	4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78	4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78	5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78	5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78	5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78	5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78	5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78	5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78	5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78	5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78	5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78	5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78	5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78	5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78	6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78	6.083	1.58	12.167	120.75	18.250	1.78		
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78								
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18	Max.Eff.Inten.(mm/hr)=	120.75	159.50					
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18	over (min)	5.00	5.00					
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18	Storage Coeff. (min)=	1.10 (ii)	4.13 (ii)					
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18	Unit Hyd. Tpeak (min)=	5.00	5.00					
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18	Unit Hyd. peak (cms)=	0.34	0.24					
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18								
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18	PEAK FLOW (cms)=	0.03	0.04					*TOTALS*
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18	TIME TO PEAK (hrs)=	12.25	12.25					0.065 (iii)
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18	RUNOFF VOLUME (mm)=	96.65	62.51					12.25
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18	TOTAL RAINFALL (mm)=	98.65	98.65					75.14
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18	RUNOFF COEFFICIENT =	0.98	0.63					98.65
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18								0.76
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18								
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18								
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18								
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18								
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18								
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18								
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18								
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18								
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18								
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18								
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18								
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18								
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18								
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18								

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0206) | Area (ha)= 0.18  
| ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00  
-----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.12	0.06
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	1.00
Length	(m)=	34.64	8.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18

Max.Eff.Inten.(mm/hr)=	120.75	91.01
over (min)	5.00	5.00
Storage Coeff. (min)=	1.02 (ii)	3.46 (ii)
Unit Hyd. Tpeak (min)=	5.00	5.00
Unit Hyd. peak (cms)=	0.34	0.26
PEAK FLOW (cms)=	0.04	0.02
TIME TO PEAK (hrs)=	12.25	12.25
RUNOFF VOLUME (mm)=	96.65	52.34
TOTAL RAINFALL (mm)=	98.65	98.65
RUNOFF COEFFICIENT =	0.98	0.53

\*TOTALS\*

0.052 (iii)
12.25
78.92
98.65
0.80

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18
2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----			
-----			
CALIB			
STANDHYD ( 0203)	Area (ha)=	0.08	
ID= 1 DT= 5.0 min	Total Imp(%)=	69.00	Dir. Conn.(%)= 38.00
-----			
	IMPERVIOUS	PERVIOUS (i)	
Surface Area (ha)=	0.06	0.02	
Dep. Storage (mm)=	2.00	5.00	
Average Slope (%)=	2.00	1.00	
Length (m)=	23.09	8.00	
Mannings n =	0.013	0.250	

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78

Max.Eff.Inten.(mm/hr)= 120.75 190.33  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.80 (ii) 3.63 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*  
 PEAK FLOW (cms)= 0.01 0.01 0.023 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.25 12.25  
 RUNOFF VOLUME (mm)= 96.65 65.67 77.43  
 TOTAL RAINFALL (mm)= 98.65 98.65 98.65  
 RUNOFF COEFFICIENT = 0.98 0.67 0.78

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ID1= 1 ( 0904): 0.55 0.156 12.25 75.62  
 + ID2= 2 ( 0206): 0.18 0.052 12.25 78.92  
 =====  
 ID = 3 ( 0904): 0.73 0.208 12.25 76.43

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | CALIB |  
 | STANDHYD ( 0304) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00  
 -----

		IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)=	0.07	0.16
Dep. Storage	(mm)=	2.00	5.00
Average Slope	(%)=	2.00	0.50
Length	(m)=	39.16	100.00
Mannings n	=	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

-----  
 | ADD HYD ( 0904) |  
1 + 2 = 3
 AREA QPEAK TPEAK R.V.  
 (ha) (cms) (hrs) (mm)  
 ID1= 1 ( 0203): 0.08 0.023 12.25 77.43  
 + ID2= 2 ( 0204): 0.24 0.068 12.25 75.47  
 =====  
 ID = 3 ( 0904): 0.32 0.091 12.25 75.96

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | ADD HYD ( 0904) |  
3 + 2 = 1
 AREA QPEAK TPEAK R.V.  
 (ha) (cms) (hrs) (mm)  
 ID1= 3 ( 0904): 0.32 0.091 12.25 75.96  
 + ID2= 2 ( 0205): 0.23 0.065 12.25 75.14  
 =====  
 ID = 1 ( 0904): 0.55 0.156 12.25 75.62

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
 | ADD HYD ( 0904) |  
1 + 2 = 3
 AREA QPEAK TPEAK R.V.  
 (ha) (cms) (hrs) (mm)

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.58	12.250	120.75	18.33	1.78
0.167	0.00	6.250	1.58	12.333	14.22	18.42	1.78
0.250	0.00	6.333	1.78	12.417	14.21	18.50	1.78
0.333	1.09	6.417	1.78	12.500	14.21	18.58	1.78
0.417	1.09	6.500	1.78	12.583	14.21	18.67	1.78
0.500	1.09	6.583	1.78	12.667	14.21	18.75	1.78
0.583	1.09	6.667	1.78	12.750	14.21	18.83	1.78
0.667	1.09	6.750	1.78	12.833	7.30	18.92	1.78
0.750	1.09	6.833	1.78	12.917	7.30	19.00	1.78
0.833	1.09	6.917	1.78	13.000	7.30	19.08	1.78
0.917	1.09	7.000	1.78	13.083	7.30	19.17	1.78
1.000	1.09	7.083	1.78	13.167	7.30	19.25	1.78
1.083	1.09	7.167	1.78	13.250	7.30	19.33	1.78
1.167	1.09	7.250	1.78	13.333	5.33	19.42	1.78
1.250	1.09	7.333	2.17	13.417	5.33	19.50	1.78
1.333	1.09	7.417	2.17	13.500	5.33	19.58	1.78
1.417	1.09	7.500	2.17	13.583	5.33	19.67	1.78
1.500	1.09	7.583	2.17	13.667	5.33	19.75	1.78
1.583	1.09	7.667	2.17	13.750	5.33	19.83	1.78
1.667	1.09	7.750	2.17	13.833	4.14	19.92	1.78
1.750	1.09	7.833	2.17	13.917	4.14	20.00	1.78
1.833	1.09	7.917	2.17	14.000	4.14	20.08	1.78
1.917	1.09	8.000	2.17	14.083	4.14	20.17	1.78
2.000	1.09	8.083	2.17	14.167	4.14	20.25	1.78
2.083	1.09	8.167	2.17	14.250	4.14	20.33	1.18

2.167	1.09	8.250	2.17	14.333	2.96	20.42	1.18
2.250	1.09	8.333	2.56	14.417	2.96	20.50	1.18
2.333	1.28	8.417	2.56	14.500	2.96	20.58	1.18
2.417	1.28	8.500	2.56	14.583	2.96	20.67	1.18
2.500	1.28	8.583	2.56	14.667	2.96	20.75	1.18
2.583	1.28	8.667	2.56	14.750	2.96	20.83	1.18
2.667	1.28	8.750	2.56	14.833	2.96	20.92	1.18
2.750	1.28	8.833	2.76	14.917	2.96	21.00	1.18
2.833	1.28	8.917	2.76	15.000	2.96	21.08	1.18
2.917	1.28	9.000	2.76	15.083	2.96	21.17	1.18
3.000	1.28	9.083	2.76	15.167	2.96	21.25	1.18
3.083	1.28	9.167	2.76	15.250	2.96	21.33	1.18
3.167	1.28	9.250	2.76	15.333	2.96	21.42	1.18
3.250	1.28	9.333	3.16	15.417	2.96	21.50	1.18
3.333	1.28	9.417	3.16	15.500	2.96	21.58	1.18
3.417	1.28	9.500	3.16	15.583	2.96	21.67	1.18
3.500	1.28	9.583	3.16	15.667	2.96	21.75	1.18
3.583	1.28	9.667	3.16	15.750	2.96	21.83	1.18
3.667	1.28	9.750	3.16	15.833	2.96	21.92	1.18
3.750	1.28	9.833	3.55	15.917	2.96	22.00	1.18
3.833	1.28	9.917	3.55	16.000	2.96	22.08	1.18
3.917	1.28	10.000	3.55	16.083	2.96	22.17	1.18
4.000	1.28	10.083	3.55	16.167	2.96	22.25	1.18
4.083	1.28	10.167	3.55	16.250	2.96	22.33	1.18
4.167	1.28	10.250	3.55	16.333	1.78	22.42	1.18
4.250	1.28	10.333	4.54	16.417	1.78	22.50	1.18
4.333	1.58	10.417	4.54	16.500	1.78	22.58	1.18
4.417	1.58	10.500	4.54	16.583	1.78	22.67	1.18
4.500	1.58	10.583	4.54	16.667	1.78	22.75	1.18
4.583	1.58	10.667	4.54	16.750	1.78	22.83	1.18
4.667	1.58	10.750	4.54	16.833	1.78	22.92	1.18
4.750	1.58	10.833	6.12	16.917	1.78	23.00	1.18
4.833	1.58	10.917	6.12	17.000	1.78	23.08	1.18
4.917	1.58	11.000	6.12	17.083	1.78	23.17	1.18
5.000	1.58	11.083	6.12	17.167	1.78	23.25	1.18
5.083	1.58	11.167	6.12	17.250	1.78	23.33	1.18
5.167	1.58	11.250	6.12	17.333	1.78	23.42	1.18
5.250	1.58	11.333	9.47	17.417	1.78	23.50	1.18
5.333	1.58	11.417	9.47	17.500	1.78	23.58	1.18
5.417	1.58	11.500	9.47	17.583	1.78	23.67	1.18
5.500	1.58	11.583	9.47	17.667	1.78	23.75	1.18
5.583	1.58	11.667	9.47	17.750	1.78	23.83	1.18
5.667	1.58	11.750	9.47	17.833	1.78	23.92	1.18
5.750	1.58	11.833	29.20	17.917	1.78	24.00	1.18
5.833	1.58	11.917	29.20	18.000	1.78	24.08	1.18
5.917	1.58	12.000	29.20	18.083	1.78	24.17	1.18
6.000	1.58	12.083	120.74	18.167	1.78	24.25	1.18
6.083	1.58	12.167	120.75	18.250	1.78		

Max.Eff.Inten.(mm/hr)= 120.75 87.15

over (min) 5.00 25.00  
Storage Coeff. (min)= 1.10 (ii) 20.68 (ii)  
Unit Hyd. Tpeak (min)= 5.00 25.00  
Unit Hyd. peak (cms)= 0.34 0.05

\*TOTALS\*  
PEAK FLOW (cms)= 0.00 0.02 0.023 (iii)  
TIME TO PEAK (hrs)= 12.25 12.50 12.50  
RUNOFF VOLUME (mm)= 96.65 56.49 58.43  
TOTAL RAINFALL (mm)= 98.65 98.65 98.65  
RUNOFF COEFFICIENT = 0.98 0.57 0.59

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

(i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)  
(ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.  
(iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| ADD HYD ( 0906) |  
| 1 + 2 = 3 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 1 ( 0202): 0.16 0.016 12.42 51.29  
+ ID2= 2 ( 0304): 0.23 0.023 12.50 58.43  
===== ID = 3 ( 0906): 0.39 0.038 12.50 55.50

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----  
| ADD HYD ( 0906) |  
| 3 + 2 = 1 | AREA QPEAK TPEAK R.V.  
(ha) (cms) (hrs) (mm)  
ID1= 3 ( 0906): 0.39 0.038 12.50 55.50  
+ ID2= 2 ( 0904): 0.73 0.208 12.25 76.43  
===== ID = 1 ( 0906): 1.12 0.237 12.25 69.14

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

FINISH  
=====

=====

```
V V I SSSS U U A L (v 6.1.2001)
V V I SS U U A A L
V V I SS U U A A A A L
V V I SS U U A A L
WV I SSSS UUUU A A LLLLL
```

```
000 TTTT TTTT H H Y Y M M 000 TM
O O T T H H Y Y MM MM O O
O O T T H H Y M M O O
000 T T H H Y M M 000
```

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\232  
 bda8d-183f-493b-8d4f-6f35a33d0038\sc

Summary filename:

C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\232  
 bda8d-183f-493b-8d4f-6f35a33d0038\sc

DATE: 07/25/2023

TIME: 10:13:53

USER:

COMMENTS: \_\_\_\_\_

```
*****
** SIMULATION : (5) 50 Year Design Storm - SC **
*****
```

-----  
 | READ STORM | Filename: C:\Users\JBirchard\AppData

ata\Local\Temp\  
 ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\ee650115  
 Ptotal=109.84 mm | Comments: 50yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	1.98	12.75	15.82	19.00	1.98
0.50	1.21	6.75	1.98	13.00	8.13	19.25	1.98
0.75	1.21	7.00	1.98	13.25	8.13	19.50	1.98
1.00	1.21	7.25	1.98	13.50	5.93	19.75	1.98
1.25	1.21	7.50	2.42	13.75	5.93	20.00	1.98
1.50	1.21	7.75	2.42	14.00	4.61	20.25	1.98
1.75	1.21	8.00	2.42	14.25	4.61	20.50	1.32
2.00	1.21	8.25	2.42	14.50	3.30	20.75	1.32
2.25	1.21	8.50	2.86	14.75	3.30	21.00	1.32
2.50	1.43	8.75	2.86	15.00	3.30	21.25	1.32
2.75	1.43	9.00	3.08	15.25	3.30	21.50	1.32
3.00	1.43	9.25	3.08	15.50	3.30	21.75	1.32
3.25	1.43	9.50	3.51	15.75	3.30	22.00	1.32
3.50	1.43	9.75	3.51	16.00	3.30	22.25	1.32
3.75	1.43	10.00	3.95	16.25	3.30	22.50	1.32
4.00	1.43	10.25	3.95	16.50	1.98	22.75	1.32
4.25	1.43	10.50	5.05	16.75	1.98	23.00	1.32
4.50	1.76	10.75	5.05	17.00	1.98	23.25	1.32
4.75	1.76	11.00	6.81	17.25	1.98	23.50	1.32
5.00	1.76	11.25	6.81	17.50	1.98	23.75	1.32
5.25	1.76	11.50	10.54	17.75	1.98	24.00	1.32
5.50	1.76	11.75	10.54	18.00	1.98	24.25	1.32
5.75	1.76	12.00	32.51	18.25	1.98		
6.00	1.76	12.25	134.44	18.50	1.98		
6.25	1.76	12.50	15.82	18.75	1.98		

-----  
 | CALIB |  
 | STANDHYD ( 0303) | Area (ha)= 0.33  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area	(ha)= 0.10	0.23
Dep. Storage	(mm)= 2.00	5.00
Average Slope	(%)= 2.00	0.70
Length	(m)= 46.90	160.00
Mannings n	= 0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----



TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32

4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

Max.Eff.Inten.(mm/hr)= 134.44 84.62  
over (min) 5.00 25.00  
Storage Coeff. (min)= 1.17 (ii) 24.92 (ii)  
Unit Hyd. Tpeak (min)= 5.00 25.00  
Unit Hyd. peak (cms)= 0.34 0.05

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.03 0.035 (iii)  
TIME TO PEAK (hrs)= 12.25 12.50 12.50  
RUNOFF VOLUME (mm)= 107.84 65.55 67.62  
TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.60 0.62

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
-----

CALIB  
 STANDHYD ( 0201)  
 ID= 1 DT= 5.0 min

Area (ha)= 0.23  
 Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.09	0.14
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	39.16	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32

2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		
Max. Eff. Inten. (mm/hr)=	134.44	100.61					
over (min)	5.00	25.00					
Storage Coeff. (min)=	1.05 (ii)	23.21 (ii)					
Unit Hyd. Tpeak (min)=	5.00	25.00					
Unit Hyd. peak (cms)=	0.34	0.05					
*TOTALS*							
PEAK FLOW (cms)=	0.00	0.03	0.026 (iii)				
TIME TO PEAK (hrs)=	12.25	12.50	12.50				
RUNOFF VOLUME (mm)=	107.84	68.91	70.80				

TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
 RUNOFF COEFFICIENT = 0.98 0.63 0.64

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING: FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0903)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
1 + 2 = 3				
ID1= 1 ( 0201):	0.23	0.026	12.50	70.80
+ ID2= 2 ( 0303):	0.33	0.035	12.50	67.62
ID = 3 ( 0903):	0.56	0.061	12.50	68.92

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

CALIB	Area (ha)=	Curve Number (CN)=
NASHYD ( 0202)	0.16	76.5
ID= 1 DT= 5.0 min	Ia (mm)= 4.71	# of Linear Res.(N)= 3.00
	U.H. Tp(hrs)= 0.30	

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr	TIME hrs	RAIN mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98

1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32

5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.019 (i)  
 TIME TO PEAK (hrs)= 12.417  
 RUNOFF VOLUME (mm)= 60.315  
 TOTAL RAINFALL (mm)= 109.840  
 RUNOFF COEFFICIENT = 0.549

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB	
STANDHYD ( 0204)	Area (ha)= 0.24
ID= 1 DT= 5.0 min	Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----							
TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98

5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

Max.Eff.Inten.(mm/hr)= 134.44 194.79  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.06 (ii) 3.97 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.24

PEAK FLOW (cms)= 0.03 0.04  
TIME TO PEAK (hrs)= 12.25 12.25  
RUNOFF VOLUME (mm)= 107.84 73.58  
TOTAL RAINFALL (mm)= 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.67

\*TOTALS\*  
0.077 (iii)

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.15 0.08  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 39.16 8.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32

3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

Max.Eff.Inten.(mm/hr)= 134.44 183.95  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.05 (ii) 3.96 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.24

\*TOTALS\*  
0.074 (iii)  
12.25 12.25 12.25  
107.84 72.45 85.54  
109.84 109.84 109.84  
0.98 0.66 0.78

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

CALIB  
STANDHYD ( 0206) Area (ha)= 0.18  
ID= 1 DT= 5.0 min Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.12 0.06  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 1.00  
Length (m)= 34.64 8.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32

2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

Max.Eff.Inten.(mm/hr)= 134.44 106.53  
over (min) 5.00 5.00  
Storage Coeff. (min)= 0.98 (ii) 3.32 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.26

PEAK FLOW (cms)= 0.04 0.02 0.059 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 107.84 61.45 89.27

\*TOTALS\*

TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.56 0.81

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0203) | Area (ha)= 0.08  
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.06	0.02
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	23.09	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98

1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98
1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32

5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32
6.000	1.76	12.083	134.43	18.167	1.98	24.25	1.32
6.083	1.76	12.167	134.44	18.250	1.98		

Max.Eff.Inten.(mm/hr)= 134.44 218.55  
over (min) 5.00 5.00  
Storage Coeff. (min)= 0.77 (ii) 3.47 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.26

\*TOTALS\*  
PEAK FLOW (cms)= 0.01 0.02 0.026 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 107.84 75.82 87.97  
TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
RUNOFF COEFFICIENT = 0.98 0.69 0.80

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----

ADD HYD ( 0904)	AREA	QPEAK	TPEAK	R.V.
1 + 2 = 3	(ha)	(cms)	(hrs)	(mm)
ID1= 1 ( 0203):	0.08	0.026	12.25	87.97
+ ID2= 2 ( 0204):	0.24	0.077	12.25	85.91
=====				
ID = 3 ( 0904):	0.32	0.104	12.25	86.42

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----

ADD HYD ( 0904)	AREA	QPEAK	TPEAK	R.V.
3 + 2 = 1	(ha)	(cms)	(hrs)	(mm)
ID1= 3 ( 0904):	0.32	0.104	12.25	86.42
+ ID2= 2 ( 0205):	0.23	0.074	12.25	85.54
=====				
ID = 1 ( 0904):	0.55	0.177	12.25	86.05

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.



```

-----
| ADD HYD ( 0904) |
| 1 + 2 = 3 |
-----
          AREA   QPEAK   TPEAK   R.V.
          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0904):  0.55  0.177  12.25  86.05
+ ID2= 2 ( 0206):  0.18  0.059  12.25  89.27
-----
          ID = 3 ( 0904):  0.73  0.236  12.25  86.85

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0304) |
| ID= 1 DT= 5.0 min |
-----
          Area (ha)= 0.23
          Total Imp(%)= 31.00   Dir. Conn.(%)= 5.00

```

```

          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)= 0.07   0.16
Dep. Storage (mm)= 2.00   5.00
Average Slope (%)= 2.00   0.50
Length (m)= 39.16   100.00
Mannings n = 0.013   0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.76	12.250	134.44	18.33	1.98
0.167	0.00	6.250	1.76	12.333	15.83	18.42	1.98
0.250	0.00	6.333	1.98	12.417	15.82	18.50	1.98
0.333	1.21	6.417	1.98	12.500	15.82	18.58	1.98
0.417	1.21	6.500	1.98	12.583	15.82	18.67	1.98
0.500	1.21	6.583	1.98	12.667	15.82	18.75	1.98
0.583	1.21	6.667	1.98	12.750	15.82	18.83	1.98
0.667	1.21	6.750	1.98	12.833	8.13	18.92	1.98
0.750	1.21	6.833	1.98	12.917	8.13	19.00	1.98
0.833	1.21	6.917	1.98	13.000	8.13	19.08	1.98
0.917	1.21	7.000	1.98	13.083	8.13	19.17	1.98
1.000	1.21	7.083	1.98	13.167	8.13	19.25	1.98
1.083	1.21	7.167	1.98	13.250	8.13	19.33	1.98
1.167	1.21	7.250	1.98	13.333	5.93	19.42	1.98
1.250	1.21	7.333	2.42	13.417	5.93	19.50	1.98
1.333	1.21	7.417	2.42	13.500	5.93	19.58	1.98
1.417	1.21	7.500	2.42	13.583	5.93	19.67	1.98
1.500	1.21	7.583	2.42	13.667	5.93	19.75	1.98
1.583	1.21	7.667	2.42	13.750	5.93	19.83	1.98
1.667	1.21	7.750	2.42	13.833	4.61	19.92	1.98
1.750	1.21	7.833	2.42	13.917	4.61	20.00	1.98

1.833	1.21	7.917	2.42	14.000	4.61	20.08	1.98
1.917	1.21	8.000	2.42	14.083	4.61	20.17	1.98
2.000	1.21	8.083	2.42	14.167	4.61	20.25	1.98
2.083	1.21	8.167	2.42	14.250	4.61	20.33	1.32
2.167	1.21	8.250	2.42	14.333	3.30	20.42	1.32
2.250	1.21	8.333	2.86	14.417	3.30	20.50	1.32
2.333	1.43	8.417	2.86	14.500	3.30	20.58	1.32
2.417	1.43	8.500	2.86	14.583	3.30	20.67	1.32
2.500	1.43	8.583	2.86	14.667	3.30	20.75	1.32
2.583	1.43	8.667	2.86	14.750	3.30	20.83	1.32
2.667	1.43	8.750	2.86	14.833	3.30	20.92	1.32
2.750	1.43	8.833	3.08	14.917	3.30	21.00	1.32
2.833	1.43	8.917	3.08	15.000	3.30	21.08	1.32
2.917	1.43	9.000	3.08	15.083	3.30	21.17	1.32
3.000	1.43	9.083	3.08	15.167	3.30	21.25	1.32
3.083	1.43	9.167	3.08	15.250	3.30	21.33	1.32
3.167	1.43	9.250	3.08	15.333	3.30	21.42	1.32
3.250	1.43	9.333	3.51	15.417	3.30	21.50	1.32
3.333	1.43	9.417	3.51	15.500	3.30	21.58	1.32
3.417	1.43	9.500	3.51	15.583	3.30	21.67	1.32
3.500	1.43	9.583	3.51	15.667	3.30	21.75	1.32
3.583	1.43	9.667	3.51	15.750	3.30	21.83	1.32
3.667	1.43	9.750	3.51	15.833	3.30	21.92	1.32
3.750	1.43	9.833	3.95	15.917	3.30	22.00	1.32
3.833	1.43	9.917	3.95	16.000	3.30	22.08	1.32
3.917	1.43	10.000	3.95	16.083	3.30	22.17	1.32
4.000	1.43	10.083	3.95	16.167	3.30	22.25	1.32
4.083	1.43	10.167	3.95	16.250	3.30	22.33	1.32
4.167	1.43	10.250	3.95	16.333	1.98	22.42	1.32
4.250	1.43	10.333	5.05	16.417	1.98	22.50	1.32
4.333	1.76	10.417	5.05	16.500	1.98	22.58	1.32
4.417	1.76	10.500	5.05	16.583	1.98	22.67	1.32
4.500	1.76	10.583	5.05	16.667	1.98	22.75	1.32
4.583	1.76	10.667	5.05	16.750	1.98	22.83	1.32
4.667	1.76	10.750	5.05	16.833	1.98	22.92	1.32
4.750	1.76	10.833	6.81	16.917	1.98	23.00	1.32
4.833	1.76	10.917	6.81	17.000	1.98	23.08	1.32
4.917	1.76	11.000	6.81	17.083	1.98	23.17	1.32
5.000	1.76	11.083	6.81	17.167	1.98	23.25	1.32
5.083	1.76	11.167	6.81	17.250	1.98	23.33	1.32
5.167	1.76	11.250	6.81	17.333	1.98	23.42	1.32
5.250	1.76	11.333	10.54	17.417	1.98	23.50	1.32
5.333	1.76	11.417	10.54	17.500	1.98	23.58	1.32
5.417	1.76	11.500	10.54	17.583	1.98	23.67	1.32
5.500	1.76	11.583	10.54	17.667	1.98	23.75	1.32
5.583	1.76	11.667	10.54	17.750	1.98	23.83	1.32
5.667	1.76	11.750	10.54	17.833	1.98	23.92	1.32
5.750	1.76	11.833	32.51	17.917	1.98	24.00	1.32
5.833	1.76	11.917	32.51	18.000	1.98	24.08	1.32
5.917	1.76	12.000	32.51	18.083	1.98	24.17	1.32

6.000 1.76 |12.083 134.43 |18.167 1.98 | 24.25 1.32  
 6.083 1.76 |12.167 134.44 |18.250 1.98 |

Max.Eff.Inten.(mm/hr)= 134.44 101.87  
 over (min) 5.00 20.00  
 Storage Coeff. (min)= 1.05 (ii) 19.45 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 20.00  
 Unit Hyd. peak (cms)= 0.34 0.06

\*TOTALS\*  
 PEAK FLOW (cms)= 0.00 0.03 0.029 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.42 12.42  
 RUNOFF VOLUME (mm)= 107.84 65.96 68.00  
 TOTAL RAINFALL (mm)= 109.84 109.84 109.84  
 RUNOFF COEFFICIENT = 0.98 0.60 0.62

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
 \*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
 YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
1 + 2 = 3				
ID1= 1 ( 0202):	0.16	0.019	12.42	60.32
+ ID2= 2 ( 0304):	0.23	0.029	12.42	68.00
=====				
ID = 3 ( 0906):	0.39	0.048	12.42	64.85

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
3 + 2 = 1				
ID1= 3 ( 0906):	0.39	0.048	12.42	64.85
+ ID2= 2 ( 0904):	0.73	0.236	12.25	86.85
=====				
ID = 1 ( 0906):	1.12	0.274	12.25	79.19

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

=====

V V I SSSS U U A L (v 6.1.2001)  
 V V I SS U U A A L  
 V V I SS U U A A A A L  
 V V I SS U U A A L  
 W I SSSS UUUU A A LLLLL

000 TTTT TTTT H H Y Y M M 000 TM  
 O O T T H H Y Y M M O O  
 O O T T H H Y M M O O  
 000 T T H H Y M M 000

Developed and Distributed by Smart City Water Inc  
 Copyright 2007 - 2020 Smart City Water Inc  
 All rights reserved.

\*\*\*\*\* D E T A I L E D O U T P U T \*\*\*\*\*

Input filename: C:\Program Files (x86)\Visual OTTHYMO 6.1\VO2\voin.dat

Output filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\619  
 e3793-2e6c-47e3-922c-f7971d56b384\sc  
 Summary filename:  
 C:\Users\JBirchard\AppData\Local\Civica\XH5\d640becb-967e-4731-b5f6-00a4892452ca\619  
 e3793-2e6c-47e3-922c-f7971d56b384\sc

DATE: 07/25/2023

TIME: 10:13:54

USER:

COMMENTS: \_\_\_\_\_

\*\*\*\*\*  
 \*\* SIMULATION : (6) 100 Year Design Storm - S \*\*  
 \*\*\*\*\*

-----  
 | READ STORM | Filename: C:\Users\JBirchard\AppData\Local\Temp\  
 | |

ddb5ea80-a20e-4ff4-9c74-beb6735bad9d\3c054a99  
 Ptotal=120.77 mm Comments: 100yr 24hr 15min SCS

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.25	0.00	6.50	2.17	12.75	17.39	19.00	2.17
0.50	1.33	6.75	2.17	13.00	8.94	19.25	2.17
0.75	1.33	7.00	2.17	13.25	8.94	19.50	2.17
1.00	1.33	7.25	2.17	13.50	6.52	19.75	2.17
1.25	1.33	7.50	2.66	13.75	6.52	20.00	2.17
1.50	1.33	7.75	2.66	14.00	5.07	20.25	2.17
1.75	1.33	8.00	2.66	14.25	5.07	20.50	1.45
2.00	1.33	8.25	2.66	14.50	3.62	20.75	1.45
2.25	1.33	8.50	3.14	14.75	3.62	21.00	1.45
2.50	1.57	8.75	3.14	15.00	3.62	21.25	1.45
2.75	1.57	9.00	3.38	15.25	3.62	21.50	1.45
3.00	1.57	9.25	3.38	15.50	3.62	21.75	1.45
3.25	1.57	9.50	3.86	15.75	3.62	22.00	1.45
3.50	1.57	9.75	3.86	16.00	3.62	22.25	1.45
3.75	1.57	10.00	4.35	16.25	3.62	22.50	1.45
4.00	1.57	10.25	4.35	16.50	2.17	22.75	1.45
4.25	1.57	10.50	5.56	16.75	2.17	23.00	1.45
4.50	1.93	10.75	5.56	17.00	2.17	23.25	1.45
4.75	1.93	11.00	7.49	17.25	2.17	23.50	1.45
5.00	1.93	11.25	7.49	17.50	2.17	23.75	1.45
5.25	1.93	11.50	11.59	17.75	2.17	24.00	1.45
5.50	1.93	11.75	11.59	18.00	2.17	24.25	1.45
5.75	1.93	12.00	35.75	18.25	2.17		
6.00	1.93	12.25	147.82	18.50	2.17		
6.25	1.93	12.50	17.39	18.75	2.17		

hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45

CALIB  
 STANDHYD ( 0303) Area (ha)= 0.33  
 ID= 1 DT= 5.0 min Total Imp(%)= 30.00 Dir. Conn.(%)= 5.00

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.10	0.23
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.70
Length (m)=	46.90	160.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----  
 TIME RAIN | TIME RAIN | TIME RAIN | TIME RAIN

4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		

Max.Eff.Inten.(mm/hr)= 147.82 96.92  
over (min) 5.00 25.00  
Storage Coeff. (min)= 1.13 (ii) 23.62 (ii)  
Unit Hyd. Tpeak (min)= 5.00 25.00  
Unit Hyd. peak (cms)= 0.34 0.05

PEAK FLOW (cms)= 0.01 0.04  
TIME TO PEAK (hrs)= 12.25 12.50  
RUNOFF VOLUME (mm)= 118.77 74.98  
TOTAL RAINFALL (mm)= 120.77 120.77  
RUNOFF COEFFICIENT = 0.98 0.62

\*TOTALS\*  
0.041 (iii)  
12.50  
77.12  
120.77  
0.64

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

| STANDHYD ( 0201) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 38.00 Dir. Conn.(%)= 5.00

-----  
IMPERVIOUS PERVIOUS (i)  
Surface Area (ha)= 0.09 0.14  
Dep. Storage (mm)= 2.00 5.00  
Average Slope (%)= 2.00 0.70  
Length (m)= 39.16 160.00  
Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45

-----  
| CALIB |

2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		

Max.Eff.Inten.(mm/hr)= 147.82 135.09  
over (min) 5.00 25.00  
Storage Coeff. (min)= 1.01 (ii) 20.71 (ii)  
Unit Hyd. Tpeak (min)= 5.00 25.00  
Unit Hyd. peak (cms)= 0.34 0.05

PEAK FLOW (cms)= 0.00 0.03  
TIME TO PEAK (hrs)= 12.25 12.50  
RUNOFF VOLUME (mm)= 118.77 78.57  
TOTAL RAINFALL (mm)= 120.77 120.77

\*TOTALS\*  
0.032 (iii)  
12.50  
80.53  
120.77

RUNOFF COEFFICIENT = 0.98 0.65 0.67

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| ADD HYD ( 0903) |
| 1 + 2 = 3 |
-----
|          AREA   QPEAK   TPEAK   R.V.
|          (ha)   (cms)   (hrs)   (mm)
ID1= 1 ( 0201):  0.23  0.032  12.50  80.53
+ ID2= 2 ( 0303):  0.33  0.041  12.50  77.12
=====
ID = 3 ( 0903):  0.56  0.073  12.50  78.52

```

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

```

-----
| CALIB |
| NASHYD ( 0202) | Area (ha)= 0.16 Curve Number (CN)= 76.5
| ID= 1 DT= 5.0 min | Ia (mm)= 4.71 # of Linear Res.(N)= 3.00
-----
| U.H. Tp(hrs)= 0.30

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

```

----- TRANSFORMED HYETOGRAPH -----

```

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17

1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45

5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		

Unit Hyd Qpeak (cms)= 0.020

PEAK FLOW (cms)= 0.022 (i)  
 TIME TO PEAK (hrs)= 12.417  
 RUNOFF VOLUME (mm)= 69.371  
 TOTAL RAINFALL (mm)= 120.770  
 RUNOFF COEFFICIENT = 0.574

(i) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
 CALIB  
 STANDHYD ( 0204) Area (ha)= 0.24  
 ID= 1 DT= 5.0 min Total Imp(%)= 65.00 Dir. Conn.(%)= 36.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.16	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	40.00	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17

0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45

5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		

Max.Eff.Inten.(mm/hr)= 147.82 220.02  
over (min) 5.00 5.00  
Storage Coeff. (min)= 1.02 (ii) 3.82 (ii)  
Unit Hyd. Tpeak (min)= 5.00 5.00  
Unit Hyd. peak (cms)= 0.34 0.25

\*TOTALS\*

PEAK FLOW (cms)= 0.04 0.05 0.086 (iii)  
TIME TO PEAK (hrs)= 12.25 12.25 12.25  
RUNOFF VOLUME (mm)= 118.77 83.51 96.19  
TOTAL RAINFALL (mm)= 120.77 120.77 120.77  
RUNOFF COEFFICIENT = 0.98 0.69 0.80

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |  
| STANDHYD ( 0205) | Area (ha)= 0.23  
| ID= 1 DT= 5.0 min | Total Imp(%)= 64.00 Dir. Conn.(%)= 37.00  
-----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.15	0.08
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	1.00
Length (m)=	39.16	8.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45

4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		
Max.Eff.Inten.(mm/hr)=	147.82	208.03					
over (min)	5.00	5.00					
Storage Coeff. (min)=	1.01 (ii)	3.81 (ii)					
Unit Hyd. Tpeak (min)=	5.00	5.00					
Unit Hyd. peak (cms)=	0.34	0.25					
							*TOTALS*
PEAK FLOW (cms)=	0.03	0.05					0.082 (iii)
TIME TO PEAK (hrs)=	12.25	12.25					12.25
RUNOFF VOLUME (mm)=	118.77	82.31					95.80
TOTAL RAINFALL (mm)=	120.77	120.77					120.77
RUNOFF COEFFICIENT =	0.98	0.68					0.79

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----  
| CALIB |



| STANDHYD ( 0206) | Area (ha)= 0.18  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 66.00 Dir. Conn.(%)= 60.00

-----  
 IMPERVIOUS PERVIOUS (i)  
 Surface Area (ha)= 0.12 0.06  
 Dep. Storage (mm)= 2.00 5.00  
 Average Slope (%)= 2.00 1.00  
 Length (m)= 34.64 8.00  
 Mannings n = 0.013 0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45

2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45
6.083	1.93	12.167	147.82	18.250	2.17		

Max.Eff.Inten.(mm/hr)= 147.82 121.97  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.94 (ii) 3.19 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.27

\*TOTALS\*  
 PEAK FLOW (cms)= 0.04 0.02 0.065 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.25 12.25  
 RUNOFF VOLUME (mm)= 118.77 70.57 99.48  
 TOTAL RAINFALL (mm)= 120.77 120.77 120.77

RUNOFF COEFFICIENT = 0.98 0.58 0.82

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

```

-----
| CALIB |
| STANDHYD ( 0203) | Area (ha)= 0.08
| ID= 1 DT= 5.0 min | Total Imp(%)= 69.00 Dir. Conn.(%)= 38.00
-----

```

```

          IMPERVIOUS   PERVIOUS (i)
Surface Area (ha)=      0.06      0.02
Dep. Storage (mm)=     2.00      5.00
Average Slope (%)=     2.00      1.00
Length (m)=          23.09      8.00
Mannings n      =      0.013     0.250

```

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

---- TRANSFORMED HYETOGRAPH ----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17

1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17
1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45

6.000 1.93 |12.083 147.81 |18.167 2.17 | 24.25 1.45  
 6.083 1.93 |12.167 147.82 |18.250 2.17 |

Max.Eff.Inten.(mm/hr)= 147.82 246.26  
 over (min) 5.00 5.00  
 Storage Coeff. (min)= 0.74 (ii) 3.34 (ii)  
 Unit Hyd. Tpeak (min)= 5.00 5.00  
 Unit Hyd. peak (cms)= 0.34 0.26

PEAK FLOW (cms)= 0.01 0.02 0.029 (iii)  
 TIME TO PEAK (hrs)= 12.25 12.25 12.25  
 RUNOFF VOLUME (mm)= 118.77 85.87 98.35  
 TOTAL RAINFALL (mm)= 120.77 120.77 120.77  
 RUNOFF COEFFICIENT = 0.98 0.71 0.81

\*TOTALS\*

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
 CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
 THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

| ADD HYD ( 0904) |  
1 + 2 = 3
 ID1= 1 ( 0904): 0.55 0.198 12.25 96.34  
 + ID2= 2 ( 0206): 0.18 0.065 12.25 99.48  
 =====  
 ID = 3 ( 0904): 0.73 0.264 12.25 97.12

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

| CALIB |  
 | STANDHYD ( 0304) | Area (ha)= 0.23  
 | ID= 1 DT= 5.0 min | Total Imp(%)= 31.00 Dir. Conn.(%)= 5.00  
 -----

	IMPERVIOUS	PERVIOUS (i)
Surface Area (ha)=	0.07	0.16
Dep. Storage (mm)=	2.00	5.00
Average Slope (%)=	2.00	0.50
Length (m)=	39.16	100.00
Mannings n =	0.013	0.250

NOTE: RAINFALL WAS TRANSFORMED TO 5.0 MIN. TIME STEP.

| ADD HYD ( 0904) |  
1 + 2 = 3
 ID1= 1 ( 0203): 0.08 0.029 12.25 98.35  
 + ID2= 2 ( 0204): 0.24 0.086 12.25 96.19  
 =====  
 ID = 3 ( 0904): 0.32 0.116 12.25 96.73

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

| ADD HYD ( 0904) |  
3 + 2 = 1
 ID1= 3 ( 0904): 0.32 0.116 12.25 96.73  
 + ID2= 2 ( 0205): 0.23 0.082 12.25 95.80  
 =====  
 ID = 1 ( 0904): 0.55 0.198 12.25 96.34

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

----- TRANSFORMED HYETOGRAPH -----

TIME	RAIN	TIME	RAIN	TIME	RAIN	TIME	RAIN
hrs	mm/hr	hrs	mm/hr	hrs	mm/hr	hrs	mm/hr
0.083	0.00	6.167	1.93	12.250	147.82	18.33	2.17
0.167	0.00	6.250	1.93	12.333	17.41	18.42	2.17
0.250	0.00	6.333	2.17	12.417	17.39	18.50	2.17
0.333	1.33	6.417	2.17	12.500	17.39	18.58	2.17
0.417	1.33	6.500	2.17	12.583	17.39	18.67	2.17
0.500	1.33	6.583	2.17	12.667	17.39	18.75	2.17
0.583	1.33	6.667	2.17	12.750	17.39	18.83	2.17
0.667	1.33	6.750	2.17	12.833	8.94	18.92	2.17
0.750	1.33	6.833	2.17	12.917	8.94	19.00	2.17
0.833	1.33	6.917	2.17	13.000	8.94	19.08	2.17
0.917	1.33	7.000	2.17	13.083	8.94	19.17	2.17
1.000	1.33	7.083	2.17	13.167	8.94	19.25	2.17
1.083	1.33	7.167	2.17	13.250	8.94	19.33	2.17
1.167	1.33	7.250	2.17	13.333	6.52	19.42	2.17
1.250	1.33	7.333	2.66	13.417	6.52	19.50	2.17
1.333	1.33	7.417	2.66	13.500	6.52	19.58	2.17
1.417	1.33	7.500	2.66	13.583	6.52	19.67	2.17
1.500	1.33	7.583	2.66	13.667	6.52	19.75	2.17
1.583	1.33	7.667	2.66	13.750	6.52	19.83	2.17
1.667	1.33	7.750	2.66	13.833	5.07	19.92	2.17
1.750	1.33	7.833	2.66	13.917	5.07	20.00	2.17
1.833	1.33	7.917	2.66	14.000	5.07	20.08	2.17

1.917	1.33	8.000	2.66	14.083	5.07	20.17	2.17
2.000	1.33	8.083	2.66	14.167	5.07	20.25	2.17
2.083	1.33	8.167	2.66	14.250	5.07	20.33	1.45
2.167	1.33	8.250	2.66	14.333	3.62	20.42	1.45
2.250	1.33	8.333	3.14	14.417	3.62	20.50	1.45
2.333	1.57	8.417	3.14	14.500	3.62	20.58	1.45
2.417	1.57	8.500	3.14	14.583	3.62	20.67	1.45
2.500	1.57	8.583	3.14	14.667	3.62	20.75	1.45
2.583	1.57	8.667	3.14	14.750	3.62	20.83	1.45
2.667	1.57	8.750	3.14	14.833	3.62	20.92	1.45
2.750	1.57	8.833	3.38	14.917	3.62	21.00	1.45
2.833	1.57	8.917	3.38	15.000	3.62	21.08	1.45
2.917	1.57	9.000	3.38	15.083	3.62	21.17	1.45
3.000	1.57	9.083	3.38	15.167	3.62	21.25	1.45
3.083	1.57	9.167	3.38	15.250	3.62	21.33	1.45
3.167	1.57	9.250	3.38	15.333	3.62	21.42	1.45
3.250	1.57	9.333	3.86	15.417	3.62	21.50	1.45
3.333	1.57	9.417	3.86	15.500	3.62	21.58	1.45
3.417	1.57	9.500	3.86	15.583	3.62	21.67	1.45
3.500	1.57	9.583	3.86	15.667	3.62	21.75	1.45
3.583	1.57	9.667	3.86	15.750	3.62	21.83	1.45
3.667	1.57	9.750	3.86	15.833	3.62	21.92	1.45
3.750	1.57	9.833	4.35	15.917	3.62	22.00	1.45
3.833	1.57	9.917	4.35	16.000	3.62	22.08	1.45
3.917	1.57	10.000	4.35	16.083	3.62	22.17	1.45
4.000	1.57	10.083	4.35	16.167	3.62	22.25	1.45
4.083	1.57	10.167	4.35	16.250	3.62	22.33	1.45
4.167	1.57	10.250	4.35	16.333	2.17	22.42	1.45
4.250	1.57	10.333	5.56	16.417	2.17	22.50	1.45
4.333	1.93	10.417	5.56	16.500	2.17	22.58	1.45
4.417	1.93	10.500	5.56	16.583	2.17	22.67	1.45
4.500	1.93	10.583	5.56	16.667	2.17	22.75	1.45
4.583	1.93	10.667	5.56	16.750	2.17	22.83	1.45
4.667	1.93	10.750	5.56	16.833	2.17	22.92	1.45
4.750	1.93	10.833	7.49	16.917	2.17	23.00	1.45
4.833	1.93	10.917	7.49	17.000	2.17	23.08	1.45
4.917	1.93	11.000	7.49	17.083	2.17	23.17	1.45
5.000	1.93	11.083	7.49	17.167	2.17	23.25	1.45
5.083	1.93	11.167	7.49	17.250	2.17	23.33	1.45
5.167	1.93	11.250	7.49	17.333	2.17	23.42	1.45
5.250	1.93	11.333	11.59	17.417	2.17	23.50	1.45
5.333	1.93	11.417	11.59	17.500	2.17	23.58	1.45
5.417	1.93	11.500	11.59	17.583	2.17	23.67	1.45
5.500	1.93	11.583	11.59	17.667	2.17	23.75	1.45
5.583	1.93	11.667	11.59	17.750	2.17	23.83	1.45
5.667	1.93	11.750	11.59	17.833	2.17	23.92	1.45
5.750	1.93	11.833	35.75	17.917	2.17	24.00	1.45
5.833	1.93	11.917	35.75	18.000	2.17	24.08	1.45
5.917	1.93	12.000	35.75	18.083	2.17	24.17	1.45
6.000	1.93	12.083	147.81	18.167	2.17	24.25	1.45

6.083 1.93 |12.167 147.82 |18.250 2.17 |

Max.Eff.Inten.(mm/hr)= 147.82 116.52  
over (min) 5.00 20.00  
Storage Coeff. (min)= 1.01 (ii) 18.45 (ii)  
Unit Hyd. Tpeak (min)= 5.00 20.00  
Unit Hyd. peak (cms)= 0.34 0.06

\*TOTALS\*

PEAK FLOW (cms)= 0.00 0.03 0.034 (iii)  
TIME TO PEAK (hrs)= 12.25 12.42 12.42  
RUNOFF VOLUME (mm)= 118.77 75.41 77.53  
TOTAL RAINFALL (mm)= 120.77 120.77 120.77  
RUNOFF COEFFICIENT = 0.98 0.62 0.64

\*\*\*\*\* WARNING: STORAGE COEFF. IS SMALLER THAN TIME STEP!  
\*\*\*\*\* WARNING:FOR AREAS WITH IMPERVIOUS RATIOS BELOW 20%  
YOU SHOULD CONSIDER SPLITTING THE AREA.

- (i) CN PROCEDURE SELECTED FOR PERVIOUS LOSSES:  
CN\* = 74.0 Ia = Dep. Storage (Above)
- (ii) TIME STEP (DT) SHOULD BE SMALLER OR EQUAL  
THAN THE STORAGE COEFFICIENT.
- (iii) PEAK FLOW DOES NOT INCLUDE BASEFLOW IF ANY.

-----

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
1 + 2 = 3				
ID1= 1 ( 0202):	0.16	0.022	12.42	69.37
+ ID2= 2 ( 0304):	0.23	0.034	12.42	77.53
=====				
ID = 3 ( 0906):	0.39	0.056	12.42	74.18

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

-----

ADD HYD ( 0906)	AREA (ha)	QPEAK (cms)	TPEAK (hrs)	R.V. (mm)
3 + 2 = 1				
ID1= 3 ( 0906):	0.39	0.056	12.42	74.18
+ ID2= 2 ( 0904):	0.73	0.264	12.25	97.12
=====				
ID = 1 ( 0906):	1.12	0.308	12.25	89.13

NOTE: PEAK FLOWS DO NOT INCLUDE BASEFLOWS IF ANY.

# Appendix C: Storage and Conveyance Calculations

PROJECT	Cranberry Marsh Estates	FILE	120181
		DATE	July 25, 2023
SUBJECT	Quality Control Swale Volume	NAME	JB
		PAGE	1 OF 1

### ENHANCED DITCH OUTLET WEIR CALCULATIONS

Target Volume,  $V_{25mm} = 98.3 \text{ m}^3$  (VO Output - 25mm Chicago Storm - Catchment 203/204/205/206)

#### DIMENSIONS

$L = 228.00 \text{ m}$  (Length of swale)  
 $w_1 = 1.80 \text{ m}$  (Width of bottom of swale)  
 $w_2 = 3.90 \text{ m}$  (Width of top of swale assuming 3:1)  
 $h = 0.185 \text{ m}$  (Depth of swale)  
 $s = 0.0 \%$  (Grade of swale)

#### VOLUME

*Assumption: Side slopes of swale are 3:1*

$V = Lhw_1 + 3h^2L = 99.3 \text{ m}^3 > V_{25mm} = 98.3 \text{ m}^3$  (Acceptable)

PROJECT	Cranberry Marsh Estates	FILE	120181
		DATE	July 25, 2023
SUBJECT	Overflow For Enhanced Grass Ditch	NAME	JB
		PAGE	1 OF 1

## ENHANCED DITCH OUTLET WEIR CALCULATIONS

### Trapezoidal Broad Crested Weir

Source: Hydraulic Structures, C.D.Smith, University of Saskatchewan

### Trapezoidal Weir

The trapezoidal weir is a combination of the rectangular weir and the triangular weir

### Target Storm

100 -Year Storm Peak Flow For Catchments 203, 204, 205 and 206 (m<sup>3</sup>/s) = 0.257

W	Weir Bottom Width (m)	2.9
H	Head (m)	0.160
L	Weir Downstream Length (m)	10
S	Side Slope (horizontal):1	3

### RECTANGULAR WEIR

$$Q = CWH^{3/2}$$

H/L 0.016  
C 1.4

Result

**Q Rectangular Weir Flow (m<sup>3</sup>/s) 0.261**

### TRIANGULAR WEIR

$$Q = CH^{5/2} \tan(\theta/2)$$

Notch Angle (one side) 71.6 degrees  
Notch Angle (one side) 1.25 radians

$$\tan(\theta / 2) = 3.00$$

Triangular H/L 0.016  
C 1.05

Result

**Q Triangular Weir Flow (m<sup>3</sup>/s) 0.0323**

Total Rectangular + Triangular Weir

$$\mathbf{Q \text{ Total Flow (m}^3\text{/s) } 0.261 + 0.032 = 0.293 > 0.257}$$

PROJECT	Cranberry Marsh Estates	FILE	120181
		DATE	July 25, 2023
SUBJECT	Culvert - Catchment 201/303	NAME	JB
		PAGE	1 OF 1

## NORTHWEST CULVERT CALCULATIONS

CATCHMENT 201/303	5-YEAR PEAK FLOW		
	CHI	SCS	
Prop. Catch. =	0.01	0.026	cms

### Circular Pipe, Full Flow

Manning's Coeff, n      0.013

Slope, S                    0.03    m/m

Diameter, D                0.200    m

Area, A                      0.0314   m<sup>2</sup>

Perimeter, P                0.6283    m

Hydraulic Radius, R      0.05      m


Flow, Q                      0.057    cms > Q<sub>peak</sub> = 0.026    cms    (Acceptable)

$$Q = \frac{1}{n} \cdot A \cdot R^{2/3} \cdot S^{1/2}$$



**Appendix D:  
Pre and Post Floodplain Storage  
Analysis**

Drawing: J:\146 - SIERRA BUILDING GROUP\2632 CRANBERRY\CAD\2632\_209.DWG Layout: Tab:209

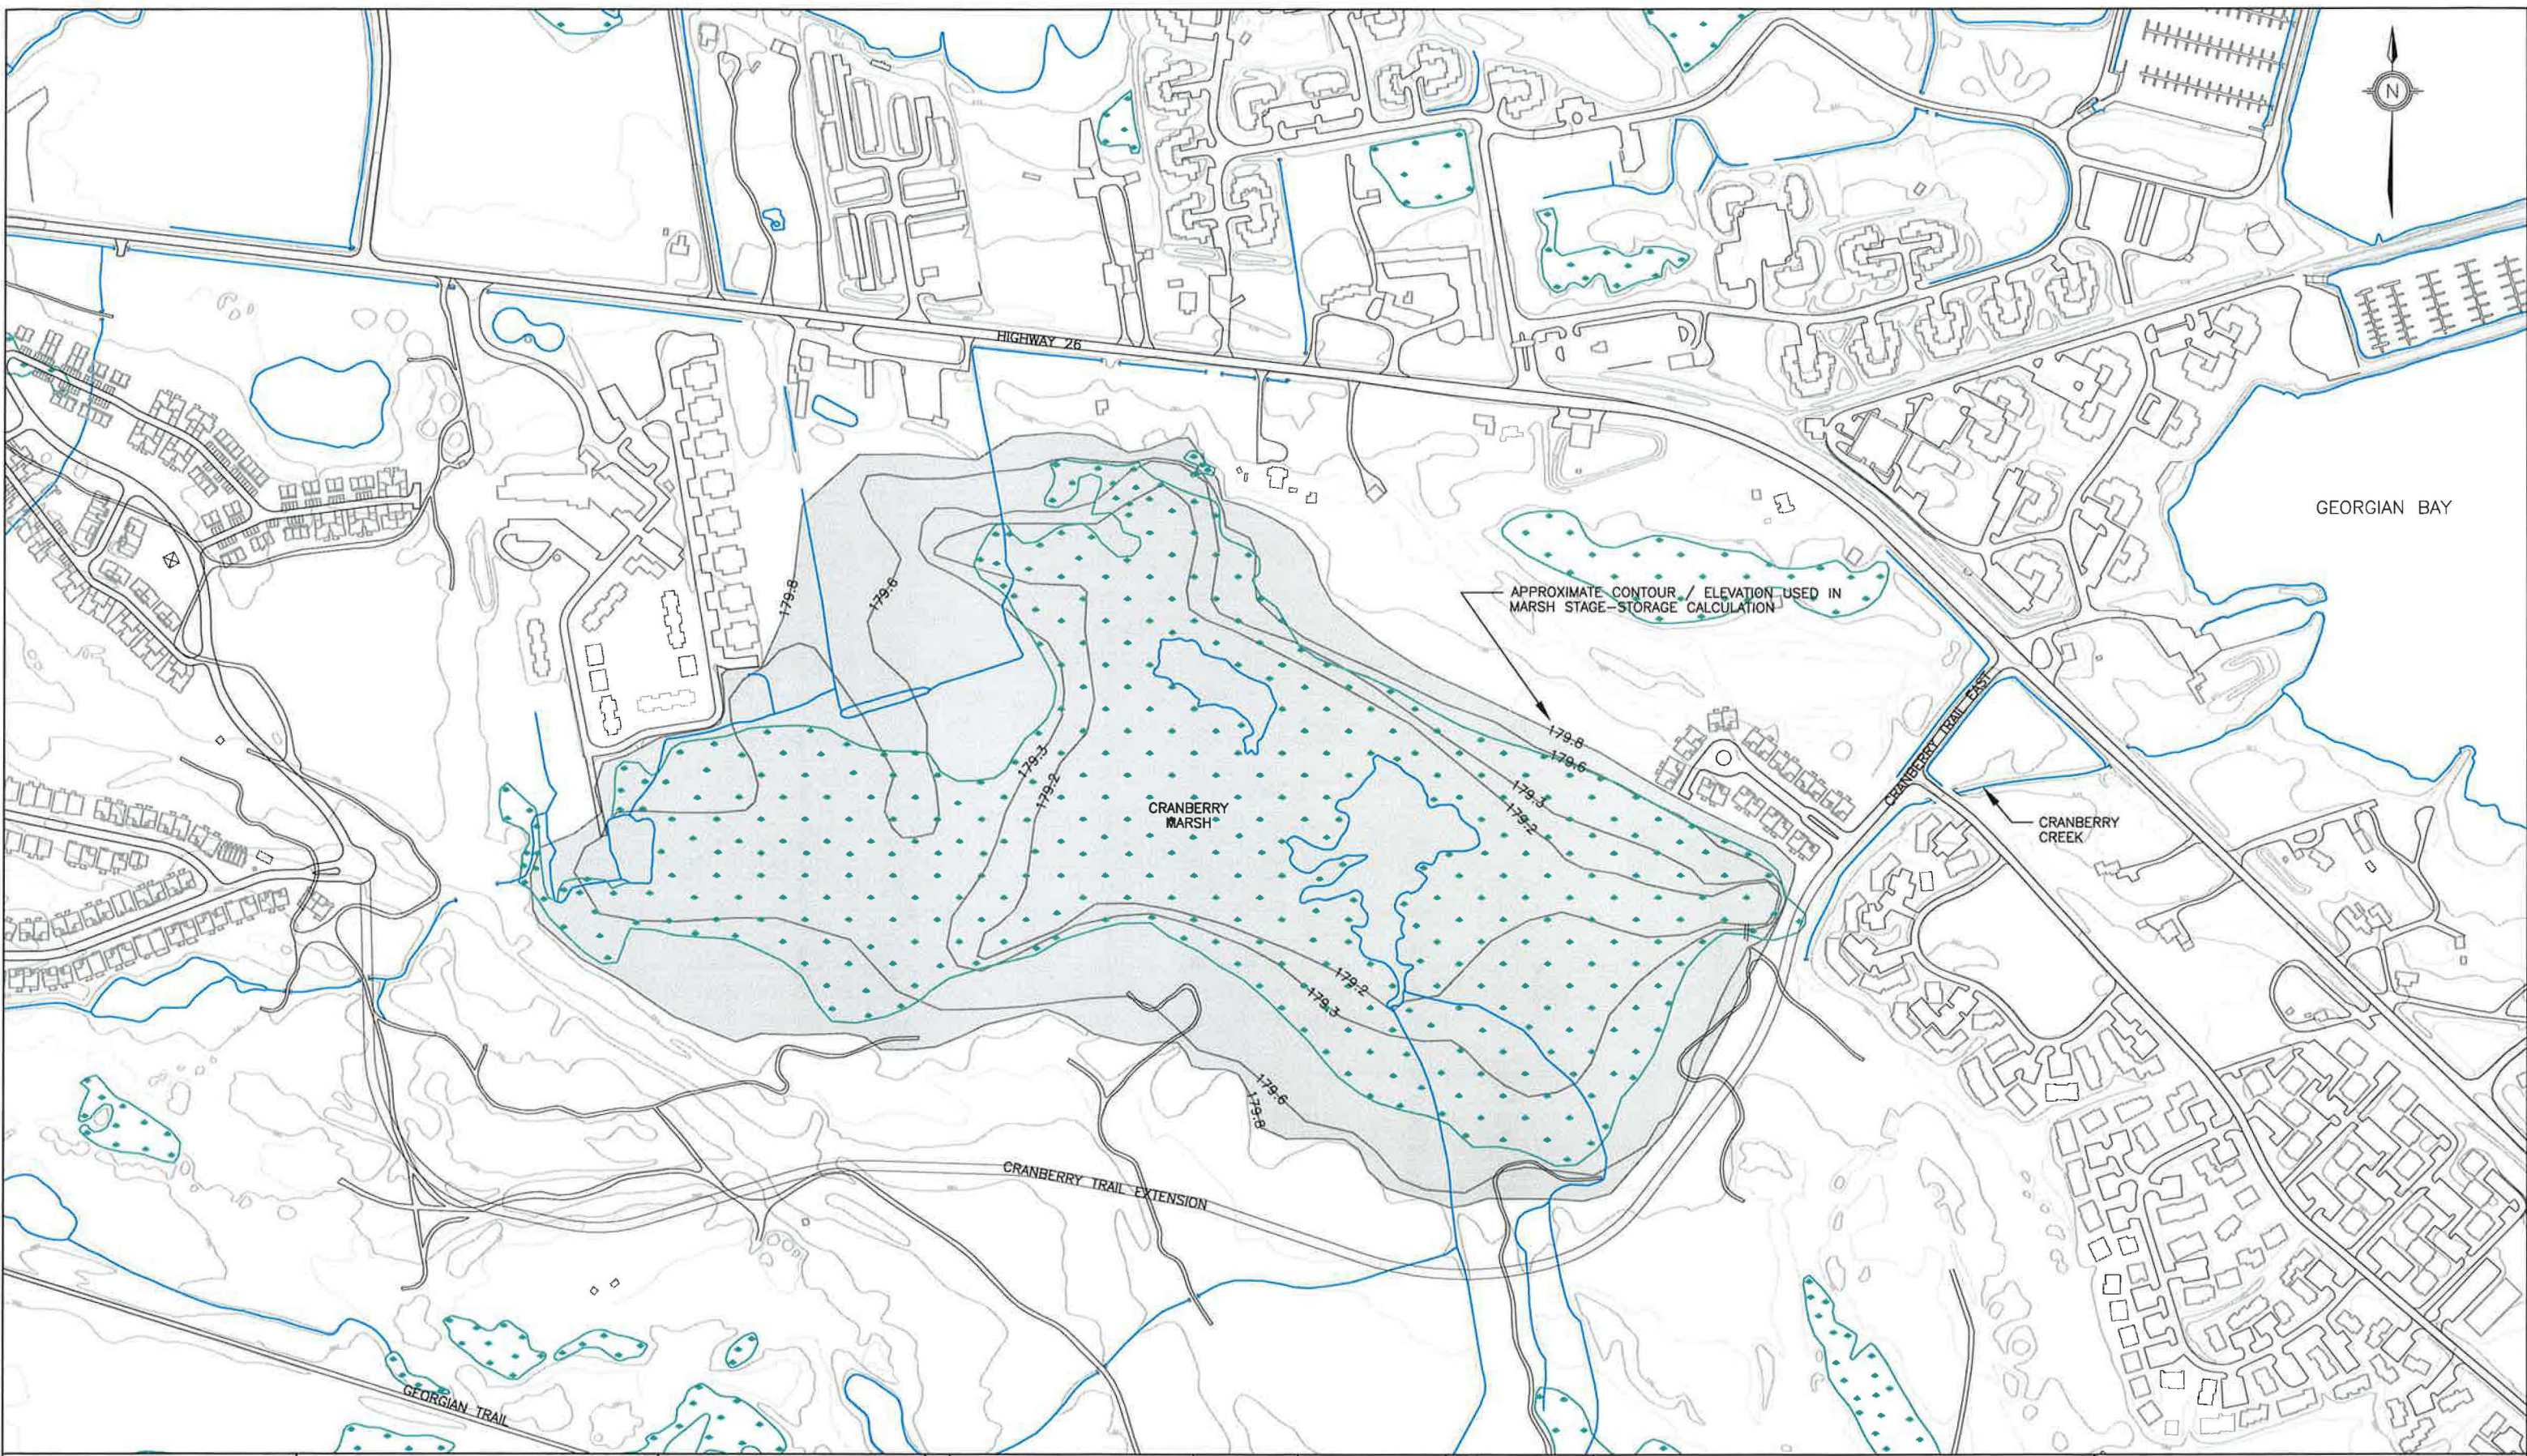

1. This drawing is the exclusive property of C.F. Crozier & Associates Inc. and the reproduction of any part without prior written consent of this office is strictly prohibited.
2. The contractor shall verify all dimensions, levels, and datums on site and report any discrepancies or omissions to this office prior to construction.
3. This drawing is to be read and understood in conjunction with all other plans and documents applicable to this project.
4. Do not scale the drawings.
5. All existing underground utilities to be verified in the field by the contractor prior to construction.

TEMPORARY BENCHMARKS	Town

No.	Issue / Revision	Date: MM/DD/YYYY	Engineer
0	ISSUE FOR REVIEW	05/03/2007	


Project	Drawing
TANGLEWOOD AT CRANBERRY TRAIL TOWN OF COLLINGWOOD	CRANBERRY MARSH STORAGE

Drawn By	Check By	Project No.
J.R.S.	N.M.	146-2632-209
Scale: 1:5000	Date: 03/26/2007	Drawing No. B1

**CF CROZIER & ASSOCIATES INC.**  
LAND DEVELOPMENT ENGINEERS

110 PINE STREET  
COLLINGWOOD ON  
L4W 2W9

T. 705-446-3510  
F. 705-446-3520  
CF@CROZIER.CA



**Cut/Fill Summary**

Name	Cut Factor	Fill Factor	2d Area	Cut	Fill	Net
SITE STORAGE - EX CRANBERRY	1.000	1.000	2784.87sq.m	278.74 Cu. M.	0.00 Cu. M.	278.74 Cu. M.<Cut>



**DISCLAIMER AND COPYRIGHT**  
 CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
 TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
 ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.

**NOTES**  
 LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATIEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6  
 TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.


No.	REVISION DESCRIPTION	DATE	ENGINEER STAMP
1.	FOR DISCUSSION	NOV 2023	
2.	1ST SUBMISSION	DEC 2023	

**CRANBERRY MARSH ESTATES**  
**TOWN OF COLLINGWOOD**

**EXISTING FLOODPLAIN STORAGE**

**TATHAM ENGINEERING**

DESIGN: DC	FILE: 120181	DWG: <b>WS-1</b>
DRAWN: KH	DATE: NOV 2023	
CHECK: DC	SCALE: 1:1000	



**Cut/Fill Summary**

Name	Cut Factor	Fill Factor	2d Area	Cut	Fill	Net
SITE STORAGE - EX CRANBERRY	1.000	1.000	2784.87sq.m	278.74 Cu. M.	0.00 Cu. M.	278.74 Cu. M.<Cut>
SITE STORAGE - EX CRANBERRY	1.000	1.000	1382.02sq.m	220.79 Cu. M.	0.00 Cu. M.	220.79 Cu. M.<Cut>
<b>Totals</b>						<b>57.95 Cu. M.&lt;Cut&gt;</b>

CONTOUR LINES TAKEN FROM MARSH STAGE STORAGE REPORT DRAWING "CRANBERRY MARSH STORAGE, CF CROZIER & ASSOCIATES INC". (TYP.)

CRANBERRY MARSH ESTATES

ADDITIONAL FLOODPLAIN SITE AREA (116.0m<sup>2</sup>) WITHIN THE DEVELOPMENT AREA

TOTAL ADDITIONAL FLOODPLAIN STORAGE WITHIN THE DEVELOPMENT LIMIT = 5.8m<sup>3</sup>

EXISTING SITE AREA (1,382m<sup>2</sup>) BEYOND THE DEVELOPMENT LIMIT WITHIN THE CRANBERRY MARSH REGIONAL FLOODPLAIN

TOTAL FLOOD STORAGE BEYOND THE DEVELOPMENT LIMIT = 220.79m<sup>3</sup>

**DISCLAIMER AND COPYRIGHT**  
 CONTRACTOR MUST VERIFY ALL DIMENSIONS AND BE RESPONSIBLE FOR SAME. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER BEFORE COMMENCING WORK. DRAWINGS ARE NOT TO BE SCALED.  
 TATHAM ENGINEERING LIMITED CLAIMS COPYRIGHT TO THIS DRAWING WHICH MAY NOT BE USED FOR ANY PURPOSE OTHER THAN THAT PROVIDED IN THE CONTRACT BETWEEN THE OWNER/CLIENT AND THE ENGINEER WITHOUT THE EXPRESS CONSENT OF TATHAM ENGINEERING LIMITED.

**BENCHMARKS**  
 ELEVATIONS SHOWN ON THIS PLAN ARE RELATED TO GEODETIC DATUM AND ARE DERIVED FROM BENCH MARK No. 0011972U311 HAVING A PUBLISHED ELEVATION OF 181.032 METRES.

**NOTES**  
 LEGAL SURVEY INFORMATION AND LOT DIMENSIONS SHOWN ON THIS PLAN ARE TAKEN FROM A SURVEY PLAN PREPARED BY PATTEN & THOMSEN LTD, DATED, JANUARY 2, 2012 JOB No. 66-170-6  
 TOPOGRAPHIC SURVEY COMPLETED BY TATHAM ENGINEERING OCTOBER, 2022.

No.	REVISION DESCRIPTION	DATE	ENGINEER STAMP
1.	FOR DISCUSSION	NOV 2023	
2.	1ST SUBMISSION	DEC 2023	

**CRANBERRY MARSH ESTATES**  
 TOWN OF COLLINGWOOD  
**PROPOSED FLOODPLAIN STORAGE**

**TATHAM ENGINEERING**

DESIGN: DC	FILE: 120181	DWG: <b>WS-2</b>
DRAWN: KH	DATE: NOV 2023	
CHECK: DC	SCALE: 1:1000	